AA-F-00367C(GSA-FSS)
February 20, 1970
SUPERSEDING
Int. Fed. Spec. AA-F-00367B(GSA-FSS)
October 26, 1960 and
INTERIM REVISION OF
Fed. Spec. AA-F-367
August 20, 1956

INTERIM FEDERAL SPECIFICATION

FILING CABINETS, STEEL, TABULATING MACHINE CARD SIZE

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-F-367, dated August 20, 1956.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers steel filing cabinets which are designed to accommodate 3-1/4 inch by 7-3/8 inch tabulating machine cards.

1.2 Classification.

1.2.1 Types. The tabulating machine card filing cabinets covered by this specification shall consist of the following types, as specified:

Type I - 11 drawers, 22 trays and full suspension (see figure 1).
Type II - 10 drawers, 20 trays and full suspension (see figure 2).

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-C-320	-	Chromium Plating (Electrodeposited).
QQ-C-416	-	Plating, Cadmium (Electrodeposited).
QQ-R-571	-	Rods, Welding, Copper and Nickel Alloys.
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements for.
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surface for Organic Coatings.
PPP-C-0020	-	Cabinets, Filing, Steel (Card and Tabulating Machine Size), Packaging, Packing, and Marking of.

Federal Standards:

Fed. Std. No. 187	-	Identification of Pressed Bends, Forms, Seams, and Joints (Sheet Metal).
Fed. Std. No. 595	-	Colors.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-W-12332A(MR) - Welding, Resistance, Spot, Seam, and Projection; for Fabricating Assemblies of Low-Carbon Steel.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-130 - Identification Marking of U.S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Iron and Steel Institute publication:

Steel Products Manual, Carbon Steel Sheets

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East Forty-Second St., New York, New York 10017.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished commodity and each component part shall be submitted or made available for the contracting officer or his authorized representatives to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of the responsibility of complying with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design and construction without the written approval of the contracting officer.

3.2 Materials. The materials used shall be as hereinafter specified. All materials shall be unused and free of defects and characteristics that adversely affect the appearance or the serviceability of the finished product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2.1 Steel. The steel used in the fabrication of the filing cabinets shall be of non-resulphurized commercial or drawing quality cold rolled, cold rolled oiled, hot rolled pickled and oiled, or hot rolled annealed and oiled, carbon steel. The cabinet back, sides, top, and drawer fronts shall be of cold rolled steel with a stretcher leveled standard of flatness within the tolerances specified in the Steel Products Manual, Carbon Steel Sheets. Hot or cold rolled steel may be used for interior structural parts. The steel shall be from coil or sheet, not previously formed or used, smooth, free from rust, scale, pits, abrasions, laps, crimps, buckles, and other imperfections affecting appearance or serviceability. The gage numbers specified herein are the manufacturers' standard gages for steel sheets. Unless otherwise specified, the decimal equivalents shown herein for the steel sheet thicknesses are subject to the established standard tolerances or ordering limits. Specimens of all steel used shall be subjected to, and meet the requirements of the bend test in 4.5.1.

3.2.2 Face hardware. The face hardware shall be of satin finished anodized aluminum alloy, type 302 corrosion-resistant steel, satin finish chromium on steel, brass, bronze, or zinc alloy. The exposed surfaces of all face hardware used on one unit shall be finished to match each other within the limits of the base materials and protective plating. The exposed surfaces of the hardware shall be free of burrs, sharp edges, pits, rough or noticeable uneven plating, and abrasions and scratches penetrating the plating. When specified (see 6.2), the face hardware shall have a brushed brass finish.

3.2.3 Bolts, nuts, screws, and other accessories. The bolts, nuts, screws, and other accessories shall be a good quality commercial product. All metallic surfaces of the bolts, nuts, screws, and other accessories shall have a plating of cadmium, chromium, or zinc. The quality of the plating shall be as commercially produced by the manufacturer of the item.

3.2.4 Finishing materials.

3.2.4.1 Primer. The primer, when used, shall be compatible with the finishing enamel.

3.2.4.2 Enamel. The finishing enamel shall be a baking type of an enamel manufacturer's quality commercial products. The color of the enamel finish shall be as specified in 3.2.4.2.1.

3.2.4.2.1 Color of finish. The color of the finish shall be gray, color No. 26134 of Federal Standard No. 595. Sample panels of the standard color are obtainable from the Business Service Center, Federal Supply Service, General Services Administration, Washington, D. C., 20407, or from the Business Service Center of the nearest GSA Regional Office.

3.2.4.3 Cadmium plating. Unless otherwise specified, the cadmium plating shall be in accordance with Class 1, Type I of QQ-P-416.

3.2.4.4 Chromium plating. Unless otherwise specified, the chromium plating shall be in accordance with Class 1, Type II of QQ-C-320.

3.2.4.5 Zinc plating. Unless otherwise specified, the zinc plating shall be in accordance with Type I, Class 2 of QQ-Z-325.

3.3 Design.

3.3.1 Type I cabinet. The design of the Type I cabinet shall be similar to figure 1, and shall be constructed with twenty-two removable trays arranged two trays wide by eleven trays high. Each set of two side-by-side interchangeable trays shall be mounted on a tray carriage which shall be carried by a full length progressive suspension.

3.3.2 Type II cabinet. The design of the Type II cabinet shall be similar to figure 2, and shall be constructed with twenty removable trays and ten drawers (two trays to each drawer). Unless otherwise specified herein, the design of the drawers and trays shall be in accordance with figure 3, which permits interchangeability of trays in all Type II cabinets procured under this specification.

3.4 Welding. The parts joined by welding shall be by the welding process specified hereinafter or by one or more of the welding processes specified in the sub-paragraphs below. All welds shall be properly fused, sound, neatly accomplished, free of cracks, pits, flash and spatter. All rough or sharp welds shall be finished smooth to prevent personal injury or clothing damage. All depressed welds on the cabinet exterior shall be filled and all protruding welds shall be finished smooth and flush with the surrounding surface.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the currentversion before use.

3.4.1 Arc welding. Arc welding of joints shall be in accordance with an industry proven process of a group of arc welding processes wherein coalescence is produced by heating with an electric arc or arcs, with or without the application of pressure and with or without the use of filler metal.

3.4.2 Torch brazing. The torch brazing shall be accomplished by a process wherein coalescence is produced by heating with a gas flame and by using a nonferrous filler metal having a melting point above 800 degrees Fahrenheit but below that of the base metal. The filler metal is distributed in the joint by capillary attraction. The brazing method shall employ oxygen-acetylene gasses and a rod conforming to Type I, Class RCuZn-D of QQ-R-571. The rod shall have a minimum tensile strength of 70,000 pounds per square inch. Brazing shall not be applied over arc welding. A copper-zinc or copper-nickel rod with a minimum tensile strength of less than 70,000 pounds per square inch may be used for non-structural brazing, such as filling joints, seams, cavities, and depressed spot or projection welds.

3.4.3 Projection, resistance, seam and spot welding. Unless otherwise specified, the projection, resistance, seam and spot welding shall be in accordance with MIL-W-12332A. The spot welds shall be located not closer to the edge of either adjoining member than one-half the greatest dimension of the spot weld, nor shall they be on centers less than twice the greatest dimension of the spot weld. Spot welds shall be spaced on centers not greater than 6 inches. Squeeze time, weld time and hold time shall be controlled to produce uniform welds that will meet the visual examination and peel test specified in sub-paragraphs of 7.3 of MIL-W-12332A. All projection and seam welds shall meet the visual examination and the test specified in the applicable sub-paragraphs of 7.3 of MIL-W-12332A.

3.5 Bends, forms, joints and seams. All bends, forms, joints, and seams specified herein shall be as depicted in Fed. Std. No. 187.

3.6 Dimensions. All dimensions of the filing cabinets shall be as hereinafter specified.

3.6.1 Tolerance. Dimensions specified herein with a referenced tolerance shall be as specified. All dimensions specified herein without a referenced tolerance shall have a tolerance of plus or minus 3/32 inch.

3.7 Construction.

3.7.1 Drawer and tray pulls. The design and dimensions of the drawer and tray pulls shall be as shown in figure 4. The pulls shall be of the material specified in 3.2.2. All surfaces and edges shall be smooth. The pulls shall have uninterrupted 1/4-20 threaded ends and shall be secured to the drawer and tray fronts with solid nuts and lockwashers. Die stamped and formed pulls are not acceptable. The inside wall of the drawer and tray front shall be recessed to receive the ends, nuts and lockwashers, or the ends may be concealed between the double walls of the drawer front. No part of the attachment shall project beyond the inside drawer or tray front.

3.7.2 Drawer and carriage latch. The drawer latch shall be plated to prevent corrosion. Each drawer shall have a readily controlled automatic latch that is sufficiently strong to hold the loaded drawer and carriage in a closed position against normal rebound, tilt, or an uneven floor. The latching mechanism shall be guarded or concealed, eliminating hazards of damage to clothing or injury to hands. The latch release knob shall be as specified in 3.7.3.

3.7.3 Latch release knob. The latch release knobs shall be of the material specified in 3.2.2, and shall be located on the front of each drawer and carriage so that they can be released when the user's hand is in position on the drawer or tray pull. The height of the knobs used on type I cabinets shall not be greater than the height of the horizontal section of the carriage front. Each release knob shall be securely attached to its connecting component in such a manner as to retain the connection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.7.4 Label holders. The label holders shall be of the material specified in 3.2.2, and may be die-cast, sand-cast, or die stamped and formed. All surfaces shall be smooth and free of roughness and sharp edges. Cast label holders shall have threaded studs and shall be attached by solid nuts and lockwashers, or by sheet spring nuts. Alternatively, label holders may have plain studs secured by sheet spring nuts. Die-stamped and formed label holders shall be of 20 gage (0.0359 inch) steel or 18 gage (0.040 inch) aluminum and shall be attached by integral lugs which pass through accurately positioned slots in the drawer front and which hold the label holder securely to the drawer front. The label holder shall have a minimum of 3 lugs, positioned on sides and bottom. The slots in the drawer front shall not project beyond the outer edge of the label holder. The fasteners used shall not penetrate the inside drawer front and shall not be visible from cabinet exterior. The label holders shall readily accommodate, without binding, label cards 2-3/4 inches by 1-3/4 inches.

3.7.5 Locks. When specified (see 6.2), automatic unit locks shall be supplied. The locking mechanism shall be controlled by a paracentric key lock which shall have not less than four pin-tumblers and shall have not less than 200 key changes. When specified (see 6.2), the lock shall be master-keyed. Two keys shall be furnished with each lock, and unless otherwise specified, each lock on each of 200 or less cabinets on one order shall be keyed differently. The face of the lock shall be of the material specified in 3.2.2, or alternatively, may be dull nickel finish on die-cast zinc alloy.

3.7.6 Drawer and carriage suspension. The drawer and carriage suspension used shall meet the service test specified in 4.5.4, and shall be in accordance with the suspension specified in 3.7.6.1 or 3.7.6.2.

3.7.6.1 Progressive suspension side arm type. The floating members of this suspension shall be constructed of not less than 16 gage (0.0598 inch) cold or hot rolled steel. The members shall be cadmium plated in accordance with 3.2.4.3 or zinc plated in accordance with 3.2.4.5. The area(s) burned during welding may have less than the minimum plating specified for the respective type of plating. Alternatively, a black oxide coating may be used provided the entire member is then coated with a clear organic finish which dries to a hard film. Each floating member shall have a channel formation along the top and bottom edges. Drawer, carriage and case members shall be formed of not less than 14 gage (0.0747 inch) steel. After forming to shape, the drawer, carriage and case members shall have a Rockwell hardness of 70-85 on the 'B' scale, and shall be cleaned and finished in accordance with paragraph 3.8, or shall have the same finish specified above for floating members. Free-rolling rollers, balls, or fixed journal rollers of the ball bearing type shall be used. When journaled rollers are used, there shall be at least three of the ball bearing types and one of the plain or solid type in each slide. The ball bearing rollers shall be not less than 1/4 inch in thickness, not less than 7/8 inch in diameter and shall be slightly chamfered on both edges. Rollers shall be accurately machined from cold-rolled steel bar and shall be case-hardened. Alternatively, the fixed journal ball bearing rollers may be cold formed from cold rolled steel. Formed rollers shall be case hardened, of the unitary type, consisting of one-piece outer and one-piece inner race. The outside diameter of the roller shall be not less than 7/8 inch, and the axial width not less than 1/4 inch. The overall width of the outer race, at the outer rolling surface, shall be not less than 7/32 inch. The inner and outer races shall have smooth, uniform and unbroken surfaces. The entire rolling surfaces of the outer race shall be concentric within 0.005 inch (total indicator reading) and parallel within 0.0025 inch, with the horizontal axis of the roller. The outer edges of the outer race shall have a chamfer or radius, or a combination of both. If a free-floating roller is used, the roller housing or retaining shall be of cold-rolled steel not less than 16 gage (0.0598 inch) thick and welded to the side arm at each end by not less than two spot welds. There shall be not less than ten free rollers or balls to a suspension. When balls are used they shall be not less than 3/8 inch in diameter, hardened and polished and so retained in concave races as to prevent dislocation or removal unless suspension is dismantled. The slides shall travel easily, quietly, and smoothly with the carriage drawer.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

3.7.6.2 Progressive suspension cradle type. This suspension shall have at least two tie members of not less than 16 gage (0.0598 inch) steel. The tie members shall be joined to the side arms by not less than two spot welds at each connection. The side arms shall be of not less than 16 gage (0.0598 inch) steel. All cradle members shall be cadmium plated in accordance with 3.2.4.3 or zinc plated in accordance with 3.2.4.5. The area(s) burned during welding may have less than the minimum plating specified for the respective type of plating. Alternatively, a black oxide coating may be used provided the entire member is then coated with a clear organic finish that dries to a hard film. Cradle side members shall have not less than one 90 degree bend along top and bottom edges. The carriage drawer and case members shall be of cold-rolled or hot-rolled steel not less than 14 gage (0.074 inch) in thickness and shall have a Rockwell hardness of 70-85 on the 'B' scale after being formed to shape. These suspension members shall be cleaned and finished in accordance with paragraph 3.8 or shall have the same finish specified above for cradle members. Free-rolling rollers, balls or rollers, balls or fixed journal rollers of the ball bearing type shall be used. When journaled rollers are used, there shall be at least three of the ball bearing type and one of the plain or solid type in each neutral member. The ball bearing rollers shall be not less than 1/4 inch in thickness, not less than 7/8 inch in diameter and shall be slightly chamfered on both edges. Rollers shall be accurately machined from cold-rolled steel bar and shall be case-hardened. Alternatively, the fixed journal ball bearing rollers may be cold formed from cold rolled steel. Formed rollers shall be case hardened, of the unitary type, consisting of one piece outer and one piece inner race. The outside diameter of the roller shall be not less than 7/8 inch, and the axial width not less than 1/4 inch. The overall width of the outer race, at the outer rolling surface, shall be not less than 7/32 inch. The inner and outer races shall have smooth, uniform and unbroken surfaces. The entire rolling surfaces of the outer race shall be concentric within 0.005 inch (total indicator reading), and parallel within 0.0025 inch, with the horizontal axis of the roller. The outer edges of the outer race shall have a chamfer or radius, or a combination of both. If a free floating roller is used, the roller housing or retainer shall be of not less than 16 gage (0.0598 inch) cold-rolled steel, and the housing or retainer shall be welded to the side arm at each end by not less than two spot welds. The slides shall travel easily, quietly, and smoothly with the carriage drawer.

3.7.7 Tray compressor. The tray compressor shall be constructed of the steel specified in 3.2.1, and shall operate in channel tracks located in the sides of the tray. Alternatively, the compressor may operate in a channel track along the bottom of the tray. The compressor shall be spring-activated and it shall be of the friction locking or the positive locking type. The positive locking compressor shall be held in place at no greater than 1/8 inch increments by engaging serrations along the sides or bottom of the tray. The compressor shall remain vertical and the compressor plate shall be free of burrs, and sharp or rough edges. The compressor shall be so constructed and positioned in the tray that the top of the compressor plate shall be above the top of the cards to be filed therein and no part of the compressor shall extend above the top of the tray sides. The compressor shall operate easily and smoothly to within 2-1/4 inches of the inner wall of the tray front. The compressor or any part thereof may be finished as specified in 3.2.3. The compressor shall meet the test specified in 4.5.6.

3.7.8 Type I cabinet.

3.7.8.1 Exterior. The exterior panels shall be of the steel specified in 3.2.1. The front corners of the top shall be completely closed by brazing or welding and finished smooth. Neatly closed lap joints without sharp or rough surfaces will be acceptable on the bottom front and rear corners. The top, bottom, and side panels shall be of not less than 20 gage (0.0359 inch) steel, and the back panel shall be of not less than 22 gage (0.0299 inch) steel. The bottom base shall be the fully enclosed pan type, or the side and back panels may be channel formed at the bottom and an inverted pan secured to the inside flanges of the channels. A lock knock-out outline in the front of the cabinet top and hole knock-out outlines on sides of the cabinet top will be permitted.

3.7.8.2 Case dimensions. The overall width of the case shall be not less than 19 inches or more than 21 inches. The overall height shall be not less than 51 inches or more than 53 inches, and the overall depth shall be not less than 28 inches or more than 28-5/8 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.7.8.3 Inner frame. The inner frame shall be constructed of the steel specified in 3.2.1. The front section shall consist of two vertical members, top member, bottom member and not less than three invisible (from the front of the cabinet) horizontal reinforcements between the carriage. The top and bottom members may be part of the cabinet case and the top may extend forward of the face of the cabinet, but not in excess of 1/8 inch. The front top and the front bottom corners of the cabinet shall be reinforced with a right angle corner bracket. These brackets shall be channel formed from not less than 16 gage (0.0598 inch) steel. Each flange shall be not less than 3/8 inch, and each leg of the corner bracket shall be not less than 9 inches long, or of sufficient length to meet the leg from the adjacent corner in the center, plus 0 inch, minus 1/8 inch. Each leg shall be reinforced in the corner by two triangular gussets of not less than 16 gage (0.0598 inch) steel, which shall be securely brazed or welded to the angle corner bracket. The angle corner brackets shall be brazed or welded to the front vertical members and to the top and bottom of the cabinet. The brackets shall not project below the lower edge of the channel formation at the front edge of the top or above the top edge of the channel formation at the front edge of the base. The horizontal reinforcements between the carriages shall be brazed, spotwelded or projection welded to the front vertical members. The case tracks for the carriage suspension shall be as specified in the subparagraphs of 3.7.6, and shall be permanently secured to the cabinet or may be removable providing they are firmly and mechanically attached to the cabinet in such a manner as to be incapable of vertical or horizontal movement, unless intentionally loosened.

3.7.8.4 Tray carriage. The carriage shall be of the steel specified in 3.2.1, and shall be rigidly constructed to support two fully loaded removable trays without distortion or sag that will impair the serviceability of the drawer. The carriage shall be mounted on full length progressive suspension as specified in 3.7.6, which shall support the carriage to its fully extended position (the rear of the carriage shall be flush with or forward the face of the cabinet), without visible deflection. The carriage shall be of open front design with rigid corner posts. The corner posts may be fabricated or integrally die formed with the carriage front. The design and construction of the carriage shall permit a tray or trays to be replaced and secured in the carriage when the carriage is closed. The nominal thicknesses of the steel used for the carriage sections shall range from 20 gage (0.0359 inch) to 14 gage (0.0747 inch), depending on the design and construction required to meet the serviceability requirements. Each carriage shall be equipped with a latch specified in 3.7.2, and two latch release knobs as specified in 3.7.3. Positive stops shall be provided that will prevent the carriage from hitting the back of the cabinet, or falling out when fully extended, but will permit easy removal when desired. The stops shall be equipped with plastic, rubber, or other durable energy absorbing bumpers, which reduce the noise of operation. The stops shall be adequate to function without distortion, loosening or failing during the expected life of the cabinet. The carriage shall meet the service test specified in 4.5.4, and the pull test specified in 4.5.5.

3.7.8.5 Removable trays. The trays shall be constructed of the steel specified in 3.2.1, and shall be designed to carry and protect the tabulating cards. The tray shall have a minimum inside width of 7-1/2 inches, a minimum inside height of 3-5/8 inches, and a minimum of 25-1/4 inches net filing depth. The minimum inside height is representative of the vertical distance from the tray bottom (surface supporting cards) to the nearest obstruction. The tray body shall be assembled by brazing or welding as specified in 3.4. The tray shall be of the box type with the front consisting of a full height inner head and outer head. The trays shall be removable without lifting over the carriage sides and shall be returnable without fully extending the carriage. The sides or bottom of the tray body shall be formed into a channel track for a compressor. The top edge of the side channel tracks shall be located at a point sufficiently below the top edge of the tabulating cards to prevent damage to the cards through the operation of the compressor. The bottom of all trays shall be flat, and the sections of the bottom of the trays, created by the division of the bottom by the compressor channel track shall be in the same horizontal plane. If the tray bottom does not have a reinforcing formation extending the full length of the bottom and within one inch of the sides, the trays shall be reinforced with two 3/4 inch equal leg angles. These angles shall extend along the outside of the lower edges of the tray to within 1/2 inch of the bottom flanges of the front and back, and shall be brazed or welded to the tray sides and bottom. The tray inner head, sides, bottom, and the angles specified above (when required) shall be of not less than 24 gage (0.0239 inch) steel. The sides of the trays with center bottom channel tracks shall have additional integral or applied reinforcing formations. The applied formation shall be a hat section, or a similar formation shall be the length

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the currentversion before use.

of the applied corner angle and shall be brazed or welded to the tray sides. This formation may replace the corner angles, if it extends under the tray bottom not less than 1/2 inch and is brazed or welded thereto. The top edge of the tray back and sides shall have a channel form and flanged, closed square, center or side bead formation. The outer head and the back of the tray shall be of not less than 22 gage (0.0299 inch) steel. The tray back shall have a laterally centered handhole not less than 2-7/8 inches wide by 7/8 inch high. The top of the handhole shall have a side bead or flat fold formation forming a double thickness or a securely attached steel rod of sufficient thickness to prevent injury to the hands or bending when lifting a fully loaded tray. The sides and bottom of the handhole may have a side bead or flat fold formation. The edges and surfaces around the perimeter of the handhole shall be free of burrs, sharp or rough edges and joints. All surfaces of the tray shall be smooth, free of burrs, sharp or rough edges and joints. The tray shall be capable of being stacked without damage to cards, and all trays shall be interchangeable in the cabinet and within a group of cabinets procured under the same contract. Each tray shall be equipped with a pull as specified in 3.7.1 and a label holder as specified in 3.7.4.

3.7.8.6 Tray compressor. The tray compressor shall be as specified in 3.7.7.

3.7.8.7 Lock mechanism. When specified (see 6.2), the cabinet shall be equipped with a lock as specified in 3.7.5. The lock mechanism, (of which the above specified lock is a part), shall be so constructed that drawers left open when the cabinet is locked will automatically and positively lock when they are closed without distorting the locking mechanism.

3.7.9 Type II cabinet.

3.7.9.1 Exterior. The exterior of the type II cabinet shall be as specified in 3.7.8.1 for the type I cabinet.

3.7.9.2 Case dimensions. The overall width of the case shall be 20 inches, plus or minus 1 inch. The overall height shall be 52-3/8 inches, plus or minus 1/8 inch, and the overall depth shall be 25 inches, plus or minus 1/8 inch.

3.7.9.3 Inner frame. The inner frame of the type II cabinet shall be as specified in 3.7.8.3, except the inner frame shall have not less than two crossrails and not less than one horizontal reinforcement, or alternatively, the inner frame may have not less than three crossrails between the drawers.

3.7.9.4 Drawer. The drawers of the type II cabinets shall be similar to figure 3, and the drawer dimensions shall be as shown therein. The drawer shall have a fully enclosed front and shall hold two trays specified in 3.7.9.5. The drawer shall be constructed of the steel specified in 3.2.1, which shall be flanged, braced or reinforced to form a rigid container to hold and support the loaded trays. The drawer shall be mounted on a full length progressive suspension as specified in 3.7.6, that will support the drawer to clear its full length without visible deflection. The drawer front shall be of double wall construction, and all edges of the outer front shall have equally wide return flange formations. The return flange formation on each side and the bottom shall have an additional 90 degree flange for brazing or spot welding to the drawer body. When spot welding is used, each side flange shall be attached to the drawer body by not less than two spot welds and not less than four spot welds shall be used to attach the bottom flange to the drawer body. The return flange formations shall be uniform. The outer drawer front shall be of not less than 20 gage (0.0359 inch) steel, and the drawer body and inner drawer front shall be not less than 24 gage (0.0239 inch) steel. The top edge of the inner front shall be formed to fit snugly into the return flange on the top edge of the outer front. The sides and bottom of the inner front shall have 90 degree flanges. The inner front shall extend full height between the top formation of the outer front and the drawer bottom. The drawer shall have a divider between the two trays, and side fillers of the configuration depicted in figure 3. The divider shall be of not less than 24 gage (0.0239 inch) steel, and shall be secured to the back and bottom by brazing or spot welding. The side fillers shall be of the same minimum gage steel and shall be brazed or spot welded to the drawer bottom. Each drawer shall be equipped with a drawer pull as specified in 3.7.1, two label holders as specified in 3.7.4, a latch as specified in 3.7.2, and a latch release knob as specified in 3.7.3 that shall be conventiently located near the drawer pull. Positive stops shall be provided that will prevent the drawer from hitting the back of the cabinet, or falling out when fully extended, but will permit easy removal when desired. The stops shall be equipped with plastic, rubber, or other durable energy absorbing bumpers, which reduce the noise of operation. All metallic parts directly engaged in the stopping action shall be of not less than 16 gage (0.0598 inch) steel. The drawer shall meet the tests specified in 4.5.4 and 4.5.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.7.9.5 Removable trays. The removable trays shall be of not less than 24 gage (0.0239 inch) steel specified in 3.2.1. The tray shall be the box type, with a minimum of 21 inches net filing depth, and the design of the tray shall permit stacking of the trays without injury to the cards. The tray shall be as shown in figure 3, and the dimensions shall be as shown therein. Alternatively, the tray may have a flat bottom, free of the offsets shown in figure 3, at the front and rear of the tray. The minimum overall height at the front and rear of the alternate tray shall be 3-25/32 inches. The tray body shall be assembled by brazing or welding specified in 3.4. The trays shall be removable by lifting out of the drawer and are not insertable when the drawer is closed. The bottom of the tray shall have a rectangular, round, or square opening that has a diameter or shorter side dimension of not less than one inch, located near the front of the tray, for manually lifting the cards. The top edge of the tray front shall be formed to facilitate lifting of the tray. The formation at the top edge of the sides and back of the tray, the channel tracks for the tray compressor, and the handhole shall be as specified in 3.7.8.5.

3.7.9.6 Tray compressor. The tray compressor shall be as specified in 3.7.7.

3.7.9.7 Lock mechanism. The cabinet lock mechanism shall be as specified in 3.7.8.7.

3.8 Pretreatment and finishing.

3.8.1 Pretreatment. All surfaces shall be smooth, free of burrs, flash, spatter, rough and sharp edges and welds before pretreatment. All unplated exterior and interior ferrous metal surfaces shall be treated for painting in accordance with any method of TT-C-490.

3.8.2 Priming. All surfaces not treated by type I or type II of TT-C-490 shall have a coating of primer as specified in 3.2.4.1. The primer coating may be omitted from all surfaces treated by type I or type II of TT-C-490.

3.8.3 Enameling. All pretreated surfaces shall have a coating of enamel as specified in 3.2.4.2, and shall be baked at the time-temperature cycle recommended by the enamel manufacturer. The total dry film thickness of enamel and primer shall be not less than 1.4 mils on all exterior surfaces and not less than 1.0 mil on interior surfaces. The enamel dry film thickness shall be not less than 1.1 mils on exterior surfaces and 0.8 mil on interior surfaces pretreated by type I or type II of TT-C-490. Special attention shall be given to the bottom of the cabinet, the underside of the top, and the interior of the cabinet to insure that these surfaces are adequately protected against corrosion. The finish shall level out to produce smooth, uniform surfaces without runs, sags, wrinkles grit, area(s) of thin or no film, and separation of color. Finished panels shall withstand the test specified in 4.5.2.

3.9 Assembly. The filing cabinets shall be assembled, to the greatest extent practical, by brazing or welding. All mechanical and welded attachments shall be as hereinbefore specified. The joining of all parts shall accomplish a rigid unit, with parts in proper alignment of sufficient strength to prevent breakage, distortion, or loosening of any part or parts during the life time use, and to withstand the stresses induced while moving when fully loaded. The assembled cabinets shall withstand the tests specified in 4.5.

3.10 Identification marking. Each cabinet shall be permanently and legibly marked in an inconspicuous place with the specification number, Federal stock number, contract number, date of manufacture, and the manufacturer's name or trade-mark, so that the source of supply may be readily determined. When specified (see 6.2), the cabinets shall be marked for identification in accordance with MIL-STD-30.

3.11 Workmanship. The workmanship shall be of a quality to produce a serviceable and acceptable end item that will withstand hard daily usage. The occurrence of defects shall not exceed the acceptable quality level specified herein. The bends of the angles, channels, and flanges shall be straight and smooth. Special attention shall be given to assure the accuracy of the moving parts, forming of parts that prevents sharp exposed edges, open joints and seams, proper bracing, brazing, and welding, and adequate finish. The cabinets shall be free of any defect that affects the appearance or serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.12 Conflict of text and figures. In case of a conflict between the text of the specification and any figure, the text shall prevail.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.2 Sampling for inspection and acceptance. Except where otherwise indicated, sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.3 End item inspection.

4.3.1 Visual examination. Examination of the filing cabinets shall be in accordance with the classification of defects specified in table I and the inspection and acceptable quality levels specified in table III. The lot size shall be expressed in units of filing cabinets for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one complete filing cabinet of each type on contract.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Steel	Not type or quality specified.		X
	Not stretcher leveled standard of flatness for parts specified.		X
	Gage (nominal thickness) less than specified.	X	
	Presence of buckles, crimps, holes, pits and scratches.	X	
Pulls	Not similar to drawing.		X
	Not of material specified.		X
	Rough surface(s) or sharp edge(s).	X	
	Not attached with nuts and lockwashers.		X
	Ends extend beyond inner head of drawer or tray front.		X
	Pull(s) missing.	X	
Label holders	Material other than specified.		X
	Will not receive and retain a label 2-3/4 inches by 1-3/4 inches.		X
	Not securely fastened to drawer or tray front.		X
	Label holder(s) missing.	X	

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (Con't)

Examine	Defect	Classification Major	Classification Minor
Lock (when specified)	Type other than specified.	X	
	One key will operate more than one lock of cabinets in groups of 200 or less.		X
	Does not lock all drawers or will not lock drawers closed after cabinet is locked.	X	
Drawers and stops	Drawer construction not as specified.	X	
	Drawer will not accommodate two fully loaded trays.	X	
	Stops will not prevent drawer from hitting back of cabinet or from falling out.	X	
	Stop(s) ineffective or prevents easy removal of drawer.		X
	Bumper(s) missing.		X
Drawer latch and release knob	Latch will not retain drawer when closed.	X	
	Material other than specified.		X
	Release knob not conveniently located to pull.		X
Drawer suspension	Not type specified.	X	
	Not constructed or finished as specified.	X	
	Not firmly attached to inner frame.	X	
	Drawer does not operate easily and smoothly.		X
Removable tray	Material not as specified.		X
	Not constructed as specified.	X	
	The top edges not finished as specified.	X	
	Handhole in back of tray omitted.	X	
	Trays are not interchangeable.	X	
	Missing part or attachment.		X
Tray compressor	Extends above sides of tray.	X	
	Not spring activated.		X
	Compressor plate not vertical.	X	
	Does not operate easily and smoothly.		X
Cabinet case and inner frame	Material not as specified.		X
	Construction not as specified.	X	
	Missing part or sub-assembly.		X
	Corners not reinforced or finished as specified.	X	
	Will not facilitate the required quantity of drawers.	X	
Bolts, nuts and screws	Finish not as specified		X
	Threads stripped or ineffective on more than one bolt or nut.	X	
	More than one bolt, nut, screw or washer missing.	X	
	One bolt, nut, screw or washer missing.		X

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (Con't)

Examine	Defect	Classification Major	Classification Minor
Brazing and welding	Brazing or welding process not as specified.	X	
	Fractured, burnt through, or poorly fused joints or welds.	X	
	More than one spot weld missing at any joint.	X	
	One spot weld missing at any joint or spot welds spaced on centers more than 6 inches.		X
	Depressed welds on cabinet not filled and finished flush with surrounding surface.		X
	Corners on cabinet case not filled and finished smooth.		X
Enamel finish	Finish other than baked enamel.	X	
	Indication of dirt, oil, rust, scale, or wax under coating.		X
	Poor adhesion (finish checking, blistering, or peeling).	X	
	Dry film thickness less than specified.		X
	Finish not dry (tacky) and soft to the touch.	X	
	Finish doesn't match Federal Standard color.		X
	Finish not smooth, or free of runs, sags, and separation of color.		X
Workmanship	Missing component(s) or sub-assembly.	X	
	Pretreatment for finishing omitted.		X
	Burrs, sharp edges, welds or projections that may cause injury or damage clothing not removed.	X	
	Buckled, broken, fractured, malformed part(s) affecting appearance or serviceability.	X	
	Dented, malformed part(s) not affecting serviceability.		X
	Flash and spatter not removed.		X

4.3.2 Dimensional examination. Inspection will be made of the filing cabinets for compliance with the dimensions specified herein, including thickness of metal. Any dimension not within the specified tolerance will be classified as a defect. The inspection and acceptable quality level shall be as shown in table III.

4.3.3 Examination of preparation for delivery. An examination will be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects will be scored in accordance with type II below. The sample unit shall be one shipping container, and the lot size shall be the number of containers in the inspection lot. The inspection and acceptable quality levels shall be as shown in table III.

TABLE II. Classification of preparation for delivery defects

Examine	Defect
Marking	Incorrect, illegible, improper size, location, sequence or method of application.
Material	Any nonconforming components, component missing, damaged or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of shroud, inadequate securing of keys and drawers of the contents, and padding of the perimeter edges.
Contents	Not as specified.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

4.5.5 Pull test. The drawer or carriage to be tested shall be loaded as specified in 4.5.4. The test shall be performed by passing a limp cord, attached to the center of the drawer front, over a sheave with the weight applied to its free end. The force required to start and move the loaded drawer or carriage to its full outward limit shall be recorded. The drawer or carriage operating force shall not exceed 3-3/4 pounds.

4.5.6 Compressor test. Not less than four trays from each unit submitted for test shall be loaded with 16 inches of 3-1/4 inch by 7-3/8 inch tabulating cards in each tray. The compressors shall be snugly positioned against the cards, and their positions shall be noted or indicated on the trays. The loaded trays shall be placed in a vertical position, with the front of the tray up, and free-dropped onto a firm wood, concrete, or tiled concrete surface, from a height of 6 inches. The attitude of the tray, at time of contact with the firm surface, shall be not more than 20 degrees from vertical. The position and condition of the compressors shall be examined at the completion of the test. The compressors shall be considered as failing the test if any one of them moved from the position noted or marked prior to being dropped, or upon evidence of damage to the compressors or tracks.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing and marking. Preservation, packaging, packing and marking shall be level A, B, or C in accordance with PPP-C-0020. The level of protection shall be as specified (see 6.2).

6. NOTES

6.1 Intended use. The filing cabinets covered by this specification are intended for filing, finding, and storage of tabulating machine card records. The type I filing cabinet has a net filing capacity to accommodate approximately 83,325 cards, and the type II filing cabinet has a net filing capacity to accommodate approximately 63,000 cards. The card count is rated on 150 cards to the inch of minimum net filing capacity.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) Whether type I or type II cabinets are required (see 1.2.1).
(c) Whether preproduction sample is not required (see 3.1).
(d) Whether hardware with brushed brass finish is required (see 3.2.2).
(e) Whether locks are required (see 3.7.5).
(f) Whether locks capable of being master-keyed are required (see 3.7.5).
(g) Whether special marking is required (see 3.10).
(h) Whether packaging and packing level A, B, or C is required (see 5.1).

6.3 Federal specification coverage. Federal specifications do not include all the types, classes, and sizes of the commodity covered by the title of the specification or which are commercially available, but are intended to cover the types, etc. which are generally procured by the Federal Government.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

4.4 Inspection levels and acceptable quality levels (AQL's). Inspection and acceptable quality levels expressed in defects per hundred units shall be in accordance with MIL-STD-105, and as shown in table III.

TABLE III. Inspection and acceptable quality levels

	Inspection levels	Acceptable quality levels Major	Total
For defects listed in 4.3.1	II	4.0	10.0
For defects listed in 4.3.2	II	---	4.0
For defects listed in 4.3.3	S-2	---	4.0

4.5 Tests.

4.5.1 Bend test for steel sheets. The steel sheets used for parts with up to 0.15 percent carbon shall withstand a 180 degree flat bend onto itself, at room temperature, in any direction without showing any cracks or fractures on the outside of the bend. The steel sheets used for parts with 0.15 percent to 0.25 percent carbon shall withstand a 180 degree bend, at room temperature, in any direction around and onto a thickness equal to that of the specimen without evidence of any defects stated above.

4.5.2 Finishing tests. A 20-gage steel panel shall be prepared in accordance with 3.8 and subjected to the following tests.

4.5.2.1 Hardness test. The dry film shall withstand the firm stroke of a 2H pencil held at a 45 degree angle and pushed across the film surface without evidence of marring when viewed at an oblique angle in a strong light.

4.5.2.2 Flexibility test. The dry film shall show no evidence of cracking or flaking under seven power magnification after the finished panel has been bent 180 degrees over a 1/8 inch diameter mandrel.

4.5.2.3 Adhesion test. The dry film shall not be removed from the panel when the panel has been scored with a razor through the film to the base metal in such a manner as to produce a grid of 1/8 inch squares, and a one inch wide piece of cellophane tape, (Scotch Brand No. 600 or equivalent), is firmly applied to the grid surface and then quickly pulled from the surface.

4.5.3 Rack test. One sample cabinet offered for inspection shall be examined and tested to determine the impairment to the ease of the drawer operation, the lock and locking mechanism, (when specified), the latches and other movable components when fully loaded and positioned on uniform and uneven supports. First the cabinet shall be positioned on an uniform support. Each tray of the cabinet shall be loaded to capacity with 3-1/4 inch by 7-3/4 inch tabulating cards, or other substance of equal weight of the cards may be used providing the weight is uniformly distributed, front to rear, within the tray. The loaded cabinet shall be examined for possible impairment to the components stated above, and the drawer pull test specified in 4.5.4 shall be performed. The loaded cabinet then shall be positioned for 24 hours on two supports that position the bottom of the cabinet not less than 1 inch above the uniform base. The supports shall be located at diagonally opposite corners, and no support shall be farther inward than 6 inches from the vertex of the corner. After 24 hours, the loaded cabinet shall be returned to the uniform support and shall be re-examined for defects and impairment to the components stated above. The drawer pull test specified in 4.5.4 shall be performed and the permissible drawer operating force shall not exceed 3-3/4 pounds.

4.5.4 Service test. Each tray of the drawer or carriage selected for testing shall be loaded to capacity with tabulating cards. The cabinet shall be secured in the proper position, and the front of the drawer or carriage shall be connected to a test machine that will operate the test drawer or carriage on its suspension. The test machine shall have positive adjustment (without springs) for adjusting the length of the stroke so that the drawer or carriage will travel from within 1/4 inch of the back stop to within 1/4 inch of the front stop. The drawer or carriage shall be operated at a rate of 20 cycles per minute (cpm), plus or minus 2 cpm. The test mechanism shall not contribute to the support of the drawer or carriage. The suspension shall be cleaned and lubricated at the end of 10,000 cycles and shall have no further attention until the test is completed. At the beginning of the test, and at each increment of 10,000 cycles, the pull test specified in 4.5.5 shall be performed to determine the force required to start the loaded drawer or carriage moving forward and to move it to its full outward limit. The drawer and carriage suspension shall be considered as having failed the test if the drawer or carriage operating force exceeds 3-3/4 pounds to complete the forward stroke before or at 75,000 cycles. Should failure be perceptible during any increment of 10,000 cycles, the test shall be stopped and the pull test specified in 4.5.5 shall be performed at that point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

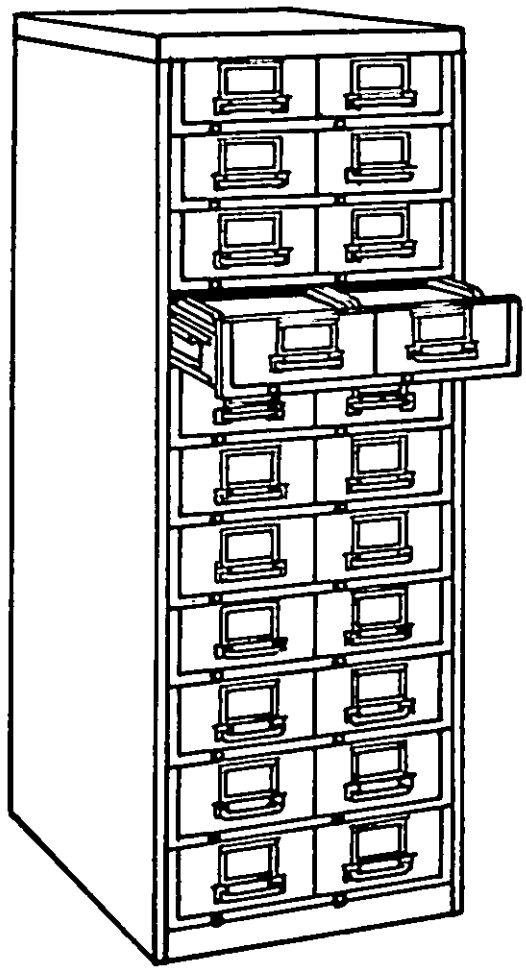


Figure 1. Type I Cabinet

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.


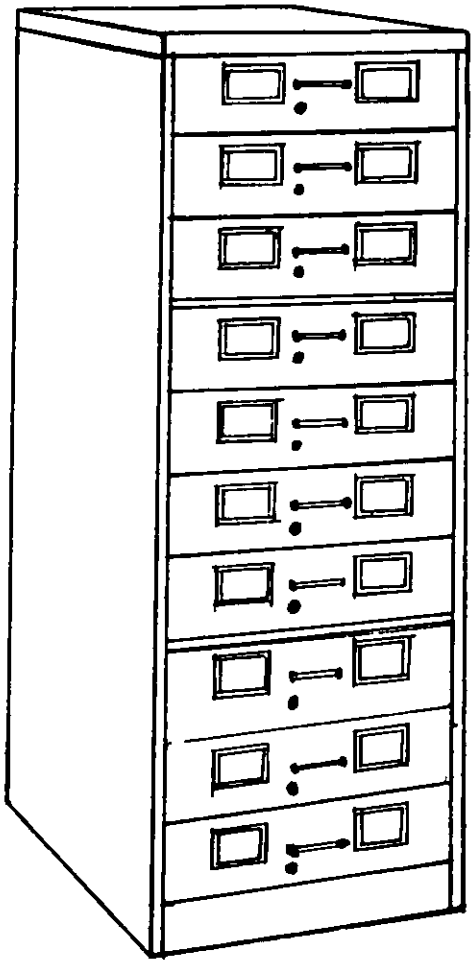


Figure 2. Type II Cabinet


Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

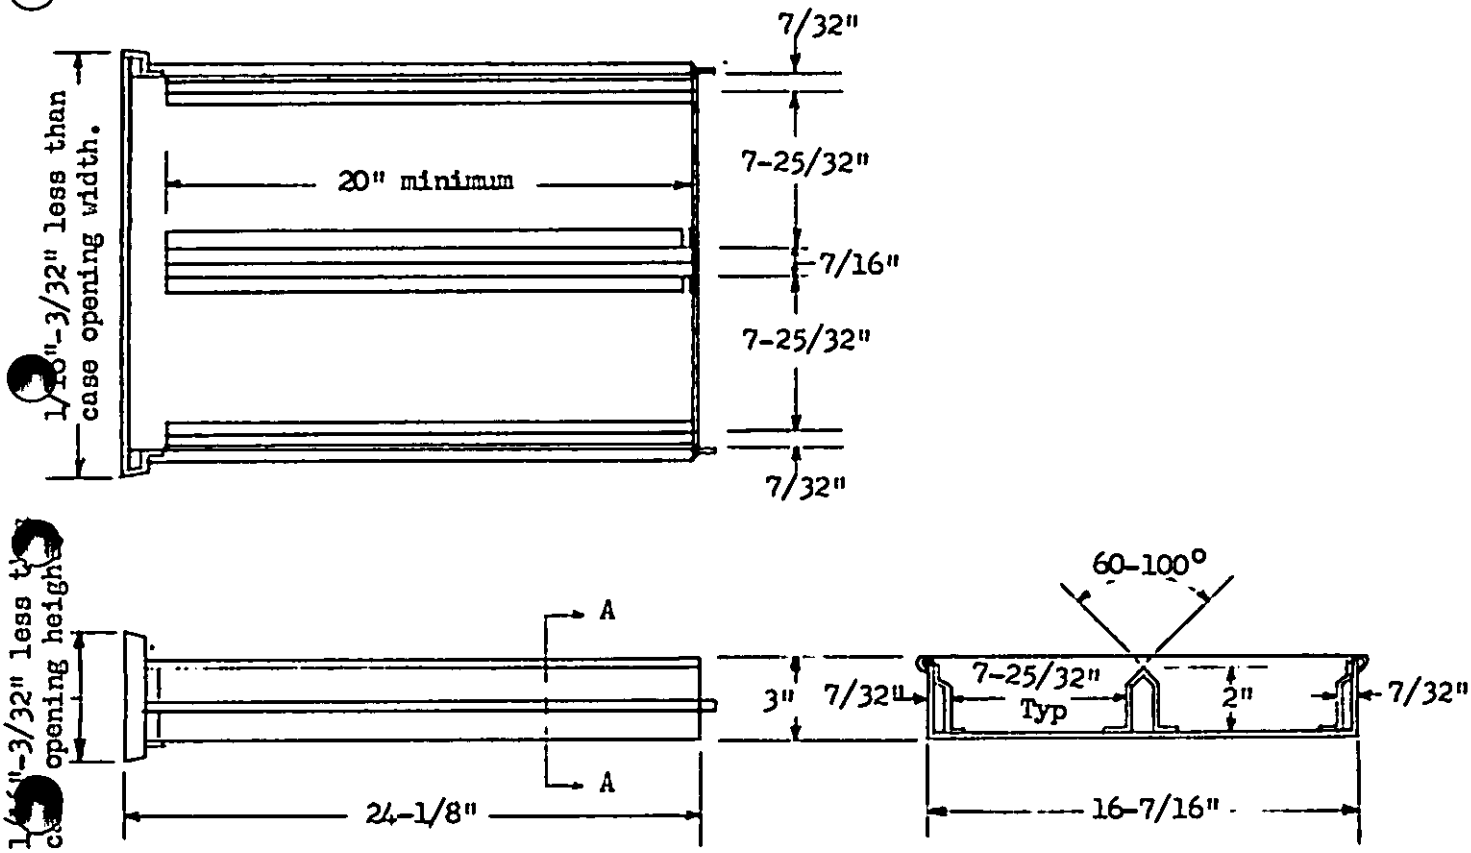

Drawer Assembly

Section A-A

Tolerances, unless otherwise specified:
Overall length or width, plus or minus 1/16 inch.
All other dimensions, plus or minus 1/32 inch.

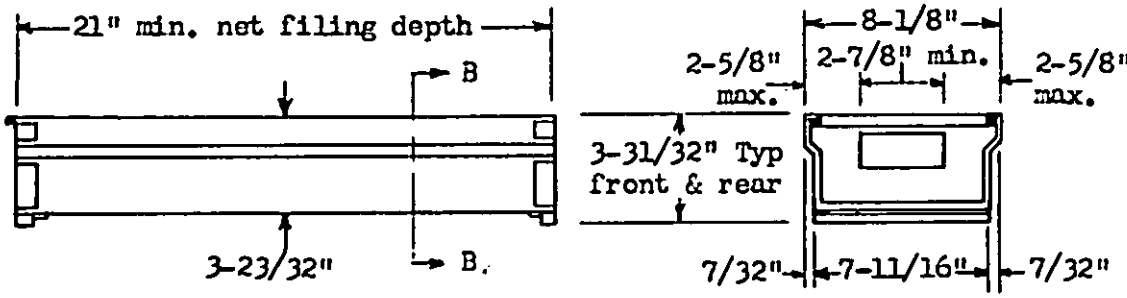

Tray Assembly

Section B-B

Figure 3. Type II Cabinet Drawer and Tray

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the currenversion before use.

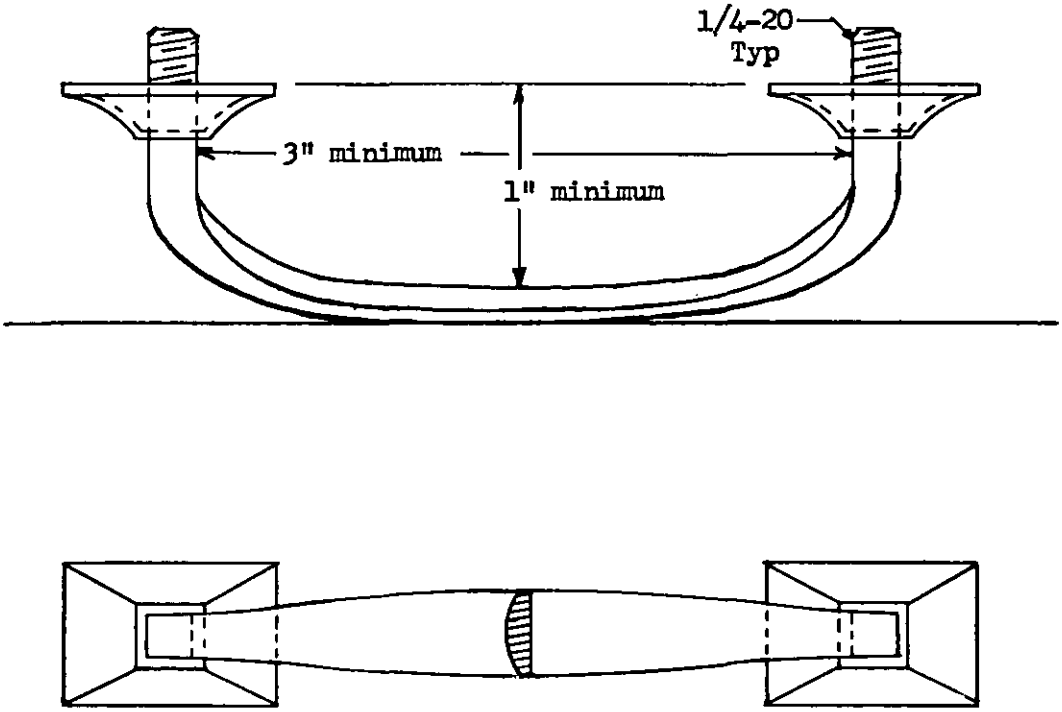


Figure 4. Drawer and Tray Pull

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS (FMSF), Washington, D.C. 20406.

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

AA-F-00367C(GSA-FSS) Filing Cabinets, Steel, Tabulating Machine Card Size

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.