AA-F-350A(GSA-FSS)
INT. AMENDMENT-2
March 26, 1975
SUPERSEDING
INT. AMENDMENT-1
January 25, 1974

INTERIM AMENDMENT

TO

FEDERAL SPECIFICATION

FILING CABINETS, STEEL, CARD SIZE

(For Desk Use)

This interim amendment was developed by the General Services Administration, Federal Supply Service, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this interim amendment as a valid exception to Federal Specification AA-F-350A, dated January 3, 1966.

PAGE 2

Paragraph 3.2.1.1. Table I. Delete table I in its entirety and substitute the following table:

TABLE I. Gages of steel parts

Parts	Gage No.	Equivalent of sheet thickness, inch
Case sides, top, bottom and back	24	0.0239
Front Partition	24	.0239
Drawer body (including wall of front)	26	.0179
Drawer guide channel	26	.0179
Compressor channel		
Plain	26	.0179
Serrated (embossed)	26	.0179
Intergral with drawer body	26	.0179
Compressor face	20	.0359
Compressor handle	22	.0239
Compressor bracket, not embossed	16	.0598
Compressor bracket, embossed	18	.0478
Corner bracket	20	.0359
Extension bail - 1/2 inch wide	16	.0598

Paragraph 3.2.3.1. Delete the entire paragraph as written and substitute the following:

3.2.3.1 Face hardware. The face hardware shall be satin chromium or satin cadmium plated on aluminum, steel, or on die-cast zinc, brass, or bronze. Brush or grind marks shall not be visible on the exposed surface. The exposed surfaces of the chromium or cadmium plating shall visually match the GSA standard sample (see 6.5) within the limits of the base material. The chromium or cadmium plating shall not peel, chip or crack and it shall be free of uneven color, pits, blisters, stains, powder film.

PAGE 3

Paragraph 3.2.4.2.1 Delete the paragraph in its entirety and substitute the following:

3.2.4.2.1 Enamel colors. The finishing enamel color shall be as specified from the following colors of Federal Standard Number 595 (see 6.1). Regardless of color specified, the drawer inner front and compressor may be finished in a gray or neutral color that is standard with the contractor.

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Gray - No. 26123 Black - No. 27049 Parchment - No. 27769

Paragraph 3.3.1. Delete entire paragraph as written and substitute the following:

3.3.1 Appearance. The general appearance of the completed cabinets and the drawers shall be as shown in figures 1A, 1B, or 1C, as applicable. The illustrations depict basic configuration but do not represent specific requirements unless so stated herein.

Paragraph 3.3.2. Table II. Delete the figures in the width column and substitute the following for the respective sizes:

Class A:					
	Size 1 ----	Min.	6-7/16	Max.	6-11/16
	Size 2 ----	Min.	7-7/16	Max.	7-11/16
	Size 3 ----	Min.	9-7/16	Max.	9-11/16
Class B:	Size 1 ----	Min.	12-5/16	Max.	12-3/4
	Size 2 ----	Min.	14-7/16	Max.	14-3/4
	Size 3 ----	Min.	18-3/8	Max.	18-3/4
	Size 4 ----	Min.	17-1/4	Max.	17-7/16

Paragraph 3.3.2.1 Tolerances. Last line of paragraph. Delete "1/16" and substitute "3/32".

Paragraph 3.3.4. Cabinet case. Line 11. Delete the remainder of the paragraph and substitute the following:

"Two stacking slots 5/8 inch long by not less than 3/64 inch wide shall be punched in the top of each cabinet. One slot shall be punched in the top, centered between the sides not more than 3/4 inch from the front of the cabinet. The other slot shall be centered between the sides and punched in the top of the cabinet not more than 3/4 inch from the back edge or in the top of the back of the cabinet. The stacking lugs shall be 19/32 inch wide and of not less than 20 gage (0.0359) inch steel. The stacking lugs shall be formed to interlock with the stacking slots and prevent stacked cabinets from sliding or tipping when loaded drawers are opened or closed. Each case shall be equipped with four removable protecting feet of the material specified in 3.2.2. The feet shall extend below the stacking lugs by at least 1/16 inch."

PAGE 4

Paragraph 3.3.5. Fourth line from top of page. Delete: drawer sides shall have rolled edges and substitute the following:

The edges of the drawer sides shall have a flat fold, roll or bead that provides strength and eliminates sharp exposed edges.

Paragraph 3.3.6. Line 4. Delete the second sentence in the paragraph and substitute the following sentence:

It shall be spring activated and the compressor plate shall be a minimum of 4-1/2 inches by 2-3/4 inches for the Class A and B, Sizes 1 and 2 units, and a minimum of 6 inches by 3-1/2 inches for the Class A, Size 3 and Class B, Size 3 and 4 cabinets.

Paragraph 3.3.7. Delete entire paragraph and substitute the following:

3.3.7 Label holder and drawer pull. The label holder and drawer pull shall meet all the requirements of 3.2.3.1. The material used shall be not less than 0.028 inch thick. The pull shall be integral with or applied to the label holder. The pull portion shall be of a style and configuration normally applied to steel contemporary style items by the commercial steel furniture industry and similar to Figure 1A. The inside clear width of the pull shall be 2-7/16 inches, minimum. Its opening depth when secured to the drawer shall permit convenient grasping. The label holder shall have a card opening size at least 2-1/4 inches wide by 3/4 inch high. The label holder and pull shall be attached securely to the front

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

PAGE 4 (cont.)

of each drawer. Fastenings used shall not extend beyond the outer face of the inner drawer front. Fastenings that are visible from normal exterior view are permitted provided they are blind fastenings and do not detract from the appearance of the unit. All exposed surfaces shall be free of sharp corners or edges including design characteristics as well as workmanship, burrs, pits, nicks and scratches.

Paragraph 3.4.3 Enameling. Delete the paragraph in its entirety and substitute the following paragraph:

3.4.3 Enameling. All pretreated surfaces shall be coated with the enamel specified in 3.2.4.2, except that the drawer inner front and compressor may be a different color than specified for the units provided color harmony is maintained. The finish shall be baked at a time-temperature cycle recommended by the enamel manufacturer. The total dry film thickness on all exterior surfaces shall be not less than 0.8 mils. The finish shall level out to produce smooth, uniform surfaces without runs, wrinkles, grits, areas of thin film, and separation of color. Finished panels shall withstand the tests specified in 4.3 and related sub-paragraphs. The specular gloss of the finish shall be within the range of 35 ± 3 units when measured in accordance with Method 6101 of Fed. Test Method Std. No. 141.

PAGE 6

Section 5. Delete the entire section and substitute the following:

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging and packing. Preservation, packaging and packing shall be level A, B, or C in accordance with PPP-C-26. The level of protection shall be as specified (see 6.1).

5.2 Marking. Marking shall be as specified in 5.2.1 or 5.2.2 as specified (see 6.1).

5.2.1 Civil agencies. In addition to the special markings required by 5.2.3, all interior packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.2.2 Military agencies. In addition to the special markings required by 5.2.3, all interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.2.3 Special marking. In addition to the special markings required by 5.2.1 or 5.2.2, each shipping container shall be marked as follows:

The upper corner of each side and each end panel shall be marked with the word "UP" in characters a minimum of 2 inches high, and an arrow pointing to the top of the container.

One side and one end of the container, in characters a minimum of 1 inch high:

FURNITURE
FRAGILE - HANDLE WITH CARE

The top panel of the container, in characters a minimum of 1 inch high:

TOP
THIS SIDE UP
FRAGILE - HANDLE WITH CARE

Additionally, to facilitate color identification, one side and one end of each interior package and shipping container, (the same side and end having the above lettering), shall have an area painted to match the color of the cabinet contained therein. These marks shall be approximately 1 inch by 3 inches on the interior packages and 3 inches by 6 inches on the shipping containers. Alternatively, color panels of the size specified above may be applied to the container. The adhesive used shall be of such quality as to assure that the color panels will not loosen or become detached during shipment and storage.

Paragraph 6.1. Add the following listings:

(g). Color (s) of finish required (see 3.2.4.2.1).
(h). Whether civil or military marking of interior packages and shipping containers is required (see 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

PAGE 7

Add the following new paragraph:

6.5 Chromium finish panels. Sample panels of the standard satin chrome finish can be obtained from the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406.

PAGE 8

The sketches shown in figure 1 are replaced by the sketches shown in figures 1A, 1B, and 1C (see 3.3.1).

GSA DC 75-8421

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

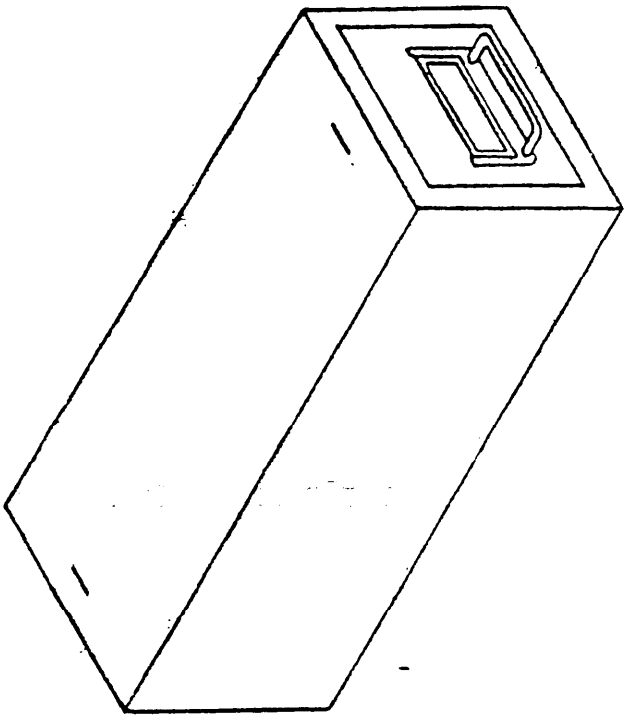


FIGURE 1A
Class A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

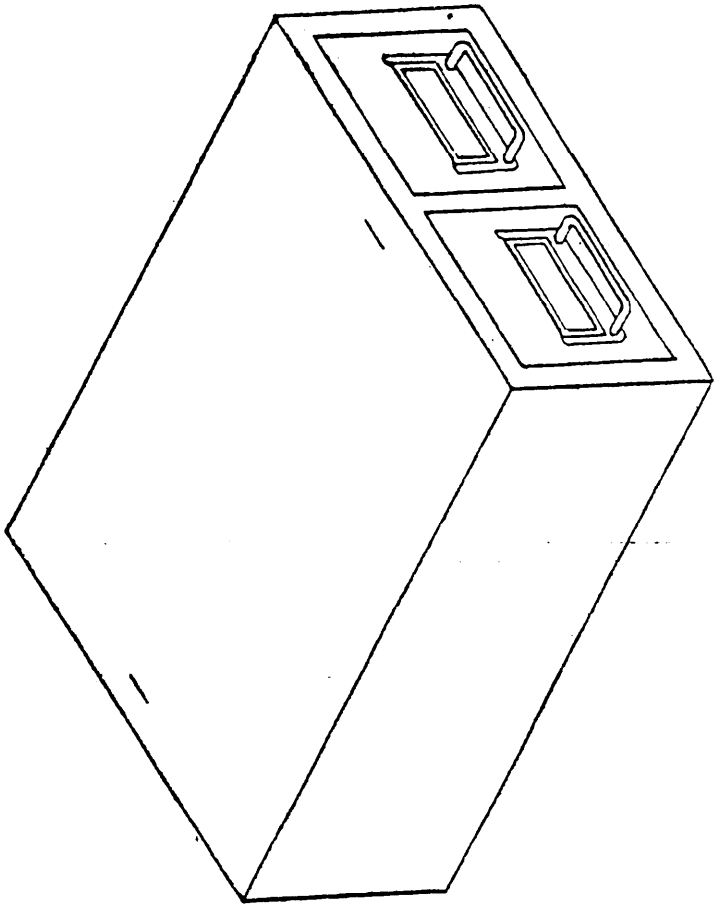


FIGURE 1B
Class B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.