AA–O–230/1a
October 7, 1964
SUPERSEDING
Int. Fed. Spec. AA–O–00230/1
February 7, 1964 and
Fed. Spec. AA–B–564
December 4, 1950

FEDERAL SPECIFICATION

OFFICE FURNITURE: BOOKCASE, EXECUTIVE TYPE, WOOD, TRADITIONAL, (DETAILED SPECIFICATION)

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the detailed requirements for the executive type office bookcase in traditional design. General requirements and other information pertaining to the bookcase will be found in Federal Specification AA–O–230, Office Furniture, executive Type, Wood, traditional (General Specification)

1.2 Classification. The bookcases covered by this specification shall be of one type and two sizes.

1.2.1 *Type and sizes.*

Size 1—42 inches wide by 14 inches deep by 50 inches high.

Size 2—44 inches wide by 14½ inches deep by 62 inches high.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 The specifications and standards, of the issue in effect on date of invitation for bids, which form a part of this specification, will be found in 2 1 of Federal Specification AA–O–230, hereinafter called the General specification.

2.2 Other publications which form a part of this specification will be found in 2.2 of the General specification.

3. REQUIREMENTS

3.1 Preproduction sample. Preproduction sample requirements shall be in accordance with 3.1 of the General specification.

3.2 Materials. The materials used in the construction of the bookcases shall be of the kind and quality specified in 3.2 of the General specification. The paragraph numbers for the various components referenced in the General specification are listed in table I

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T11:33:35Z
Check the source to verify that this is the current version before use.

TABLE I—*Material references*

AA-O-230 Par. No.	Components	AA-O-230 Par. No.	Components
3.2.1	Glass	3.2.4	Filler
3 2.2	Adhesives	3.2 5	Lacquer
3 2 3	Wood	3.2.6	Hardware
3 2 3.1	Kinds of wood	3.2.6.1	Face hardware
3 2.3.2	Solid wood	3.2.6.2	Locks
3 2 3.3	Plywood	3 2.6.2.1	Strike-plate
3 2.3.3.1	Matching, veneer plies	3.2 6.3	Composition glides
3 2.3 4	Seasoning, all wood parts	3.2.6.4	Shelf Standards and supports
3.2.3.5	Varieties of wood	3.2.6.5	Other Hardware

3.3 Construction. The general construction requirements of the bookcases and their component parts shall be as specified in 3.3 of the General specification. The paragraph numbers for the various components as found in the General specification are listed in table II.

TABLE II—*Construction references*

AA-O-230 Par. No.	Component	AA-O-230 Par. No.	Component
3.3.2	Tolerances	3.3.8.3	Shelves
3.3.4	Joining and assembly	3.3.9	Solid wood parts
3.3.5	Gluing of joints	3 3.9.2.1	Bracket foot base
3.3.8.2	Dowels	3.3.9.3	Built-up stock

3.3.1 *Design.* The design of the bookcases shall be as shown in figures 1(1) and 1(4).

3.3.2 *Direction of grain.* The grain pattern shall be as shown in figures 1(1) and 1(4).

3.3.3 *Drawers.* Drawers shall be constructed as specified in 3.3.6 of the General specification and shall run on center drawer-guides, the runner shall be neatly fitted, glued, and secured with screws to the front and back rails in true alignment. Each

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T11:33:35Z
Check the source to verify that this is the current version before use.

drawer shall have a two-prong brass or bronze pull as shown in figure 1(5).

3.3.4 *Doors.* The door frames shall be constructed of solid wood and paneled as shown in the applicable figures. The size 1 bookcase shall have one glass pane in each door. The size 2 bookcase shall have eight glass panes in each door and they shall be uniform in size. Each door shall be equipped with a door pull as shown in figure 1(2), with two bullet catches, and shall be hung securely in place by three brass or bronze hinges. The doors shall be carefully fitted in place and hung with care so as not to bind nor to fit too loosely when secured by the catches.

3.3.5 *Plywood parts.* The bookcase tops, sides, bottoms, shelves, center partitions, and drawer fronts shall be 5-ply, lumber-core construction, 13/16 inch thick. The wood panels for the doors of the size 1 bookcases shall be of 3-or 5-ply construction, 5/16 inch thick. The back panels of both bookcases shall be 3- or 5-ply, 5/16 inch thick, rabbeted into the back framing members and secured with screws inserted through brass-plated, steel-recessed washers.

3.3.6 *Posts.* All posts shall be of one continuous piece of solid wood or built-up stock, they shall extend from the top to the floor and be as shown in the applicable figures. The built-up stock shall be as specified in 3.3 9.3 of the General specification.

3.3.7 *Dust frame.* The dust frame shall be constructed as shown in figure 1(5). The front, back, and outside rails shall be ¾ inch by 1½ inches and the outer rail shall be ¾ inch by 2½ inches.

3.4 Methods of finishing. The methods of finishing shall be in accordance with 3 4 of the General specification.

3.5 Color and appearance of finish. The color and appearance of the finish shall be as specified in 3.5 of the General specification.

3.6 Identification marking. Indentification marking shall be as specified in 3.6 of the General specification.

3.7 Workmanship. Workmanship shall conform to 3.7 of the General specification.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling, inspection, and test procedures shall be as specified in section 4 of the General specification.

5. PREPARATION FOR DELIVERY

(For civil agency procurement the definitions and application of the levels of packaging and packing shall be in accordance with Fed. Std. No. 102.)

5.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 *Level A or B.*

5.1.1.1 Detachable parts. Shelves and other detachable parts shall be removed from the bookcase, protected individually with cushioning material, conforming to PPP-C-843 and packed in a separate corrugated fiberboard container conforming to PPP-B-636. All flaps shall be securely sealed with strips of 3-inch, 60-pound basis weight kraft tape conforming to UU-T-111.

5.1.1.2 *Bookcase doors.* All doors shall be immobilized by the use of clips or other suitable means of fastening. The clips shall be faced with cushioning material to prevent scratching or marring of finished surfaces. Locks furnished with the bookcases, shall not be used to secure the doors.

5.1.1.3 *Keys.* Bookcase keys shall be placed in a kraft envelope and securely fastened to the inside surface of the bookcase bottom.

5.1.1.4 *Top, sides, and front* The tops, sides, and front shall be provided with a

Source: https://assist.dla.mil -- Downloaded: 2020-04-24T13:15Z
Check the source to verify that this is the current version before use.

shroud of macerated paper blankets, wood-fiber felt blankets or with cellulose wadding conforming to PPP–C–843, type II, and secured with pressure sensitive tape

5.1.2 *Level C.* Bookcases shall be packaged in accordance with the suppliers commercial practice.

5.2 **Packing.** Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 *Level A.* Bookcases with detachable parts, packaged as specified in 5.1, and secured inside of bookcase, shall be enclosed in a shroud constructed of barrier material conforming to UU–P–271, type L–2 or M, completely sealed with adhesive conforming to the requirements of MIL–A–140 and packed in a wood-cleated fiberboard box conforming to PPP–B–591, overseas type or a nailed wood box conforming to PPP–B–621, class 2. Closure and strapping shall be in accordance with appendix to the applicable box specification.

5.2.2 *Level B.* Bookcases and detachable parts, packaged as specified in 5.1, shall be packed in fiberboard shipping containers conforming to PPP–B–636, type I, class 1, style optional, minimum bursting strength 275 p.s i. Sealing and closure shall be in accordance with the box specification. Packaged parts shall be secured inside the bookcase.

5.2.3 *Level C.* Bookcases shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with rules and regulations applicable to the mode of transportation.

5.3 **Marking.**

5.3.1 *Civil agencies* In addiiton to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123

5.3.2 *Military.* In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL–STD–129.

5.3.3 *Precautionary markings*

5.3.3.1 The top panel of each shipping container, with the bookcase in it's proper upright position, shall be marked in characters not less than 2 inches high as follows:

GLASS
FRAGILE, HANDLE WITH CARE
TOP
THIS SIDE UP

One side panel shall be marked:

UP GLASS UP
FRAGILE, HANDLE WITH CARE

6. NOTES

6.1 **Intended use.** The executive office type bookcases in traditional styling were designed for use in executive offices, courtrooms, libraries, and conference rooms of Federal agencies. They should compliment the traditional decor of any executive area when used with other pieces within the group.

6.2 **Ordering data.** Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, symbol, and date of this specification.

(*b*) Title, symbol and date of the General specification.

(*c*) Types and sizes, if applicable.

(*d*) When preproduction samples are not required.

(*e*) Level of packaging.

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T13:39Z
Check the source to verify that this is the current version before use.

(*f*) Level of packing

(*g*) Marking requirements.

6.3 Transportation description. Transportation description and minimum weights applicable to this commodity are:

Rail:

Bookcases, wooden, other than sectional, setup.

Carload minimum weights:

In cars 40'9" or less in length, inside measurements, 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds.

In cars exceeding 40'9" in length, inside measurements, 16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds


Motor:

Bookcases, wooden, other than sectional, setup.

Truckload minimum weights—10,000, 12,000, 15,000, 18,000, 22,000, and 30,000 pounds, subject to Rule 115, National Motor Freight Classification.


Source: https://assist.dla.mil -- Downloaded: 2026-04-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 1(1). Size 1—Bookcase

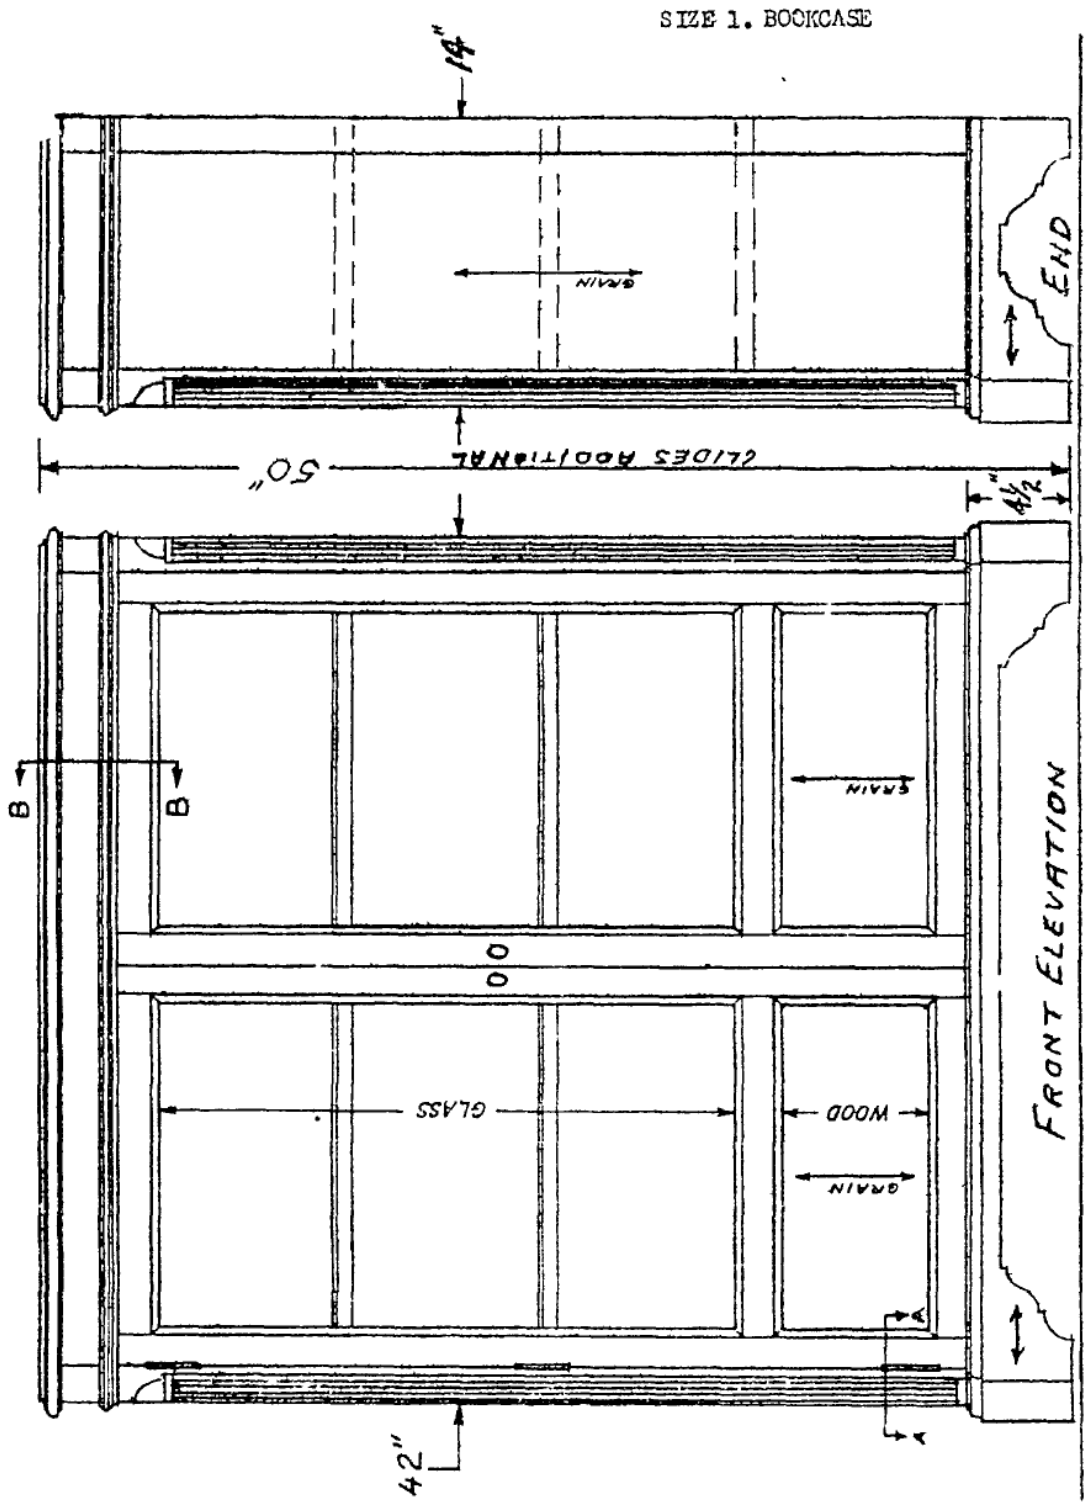


Source: https://assist.dla.mil -- Downloaded: 2026-04-26T11:19Z
Check the source to verify that this is the current version before use.

Figure 1(2). Sections A-A, B-B, and Door Pull

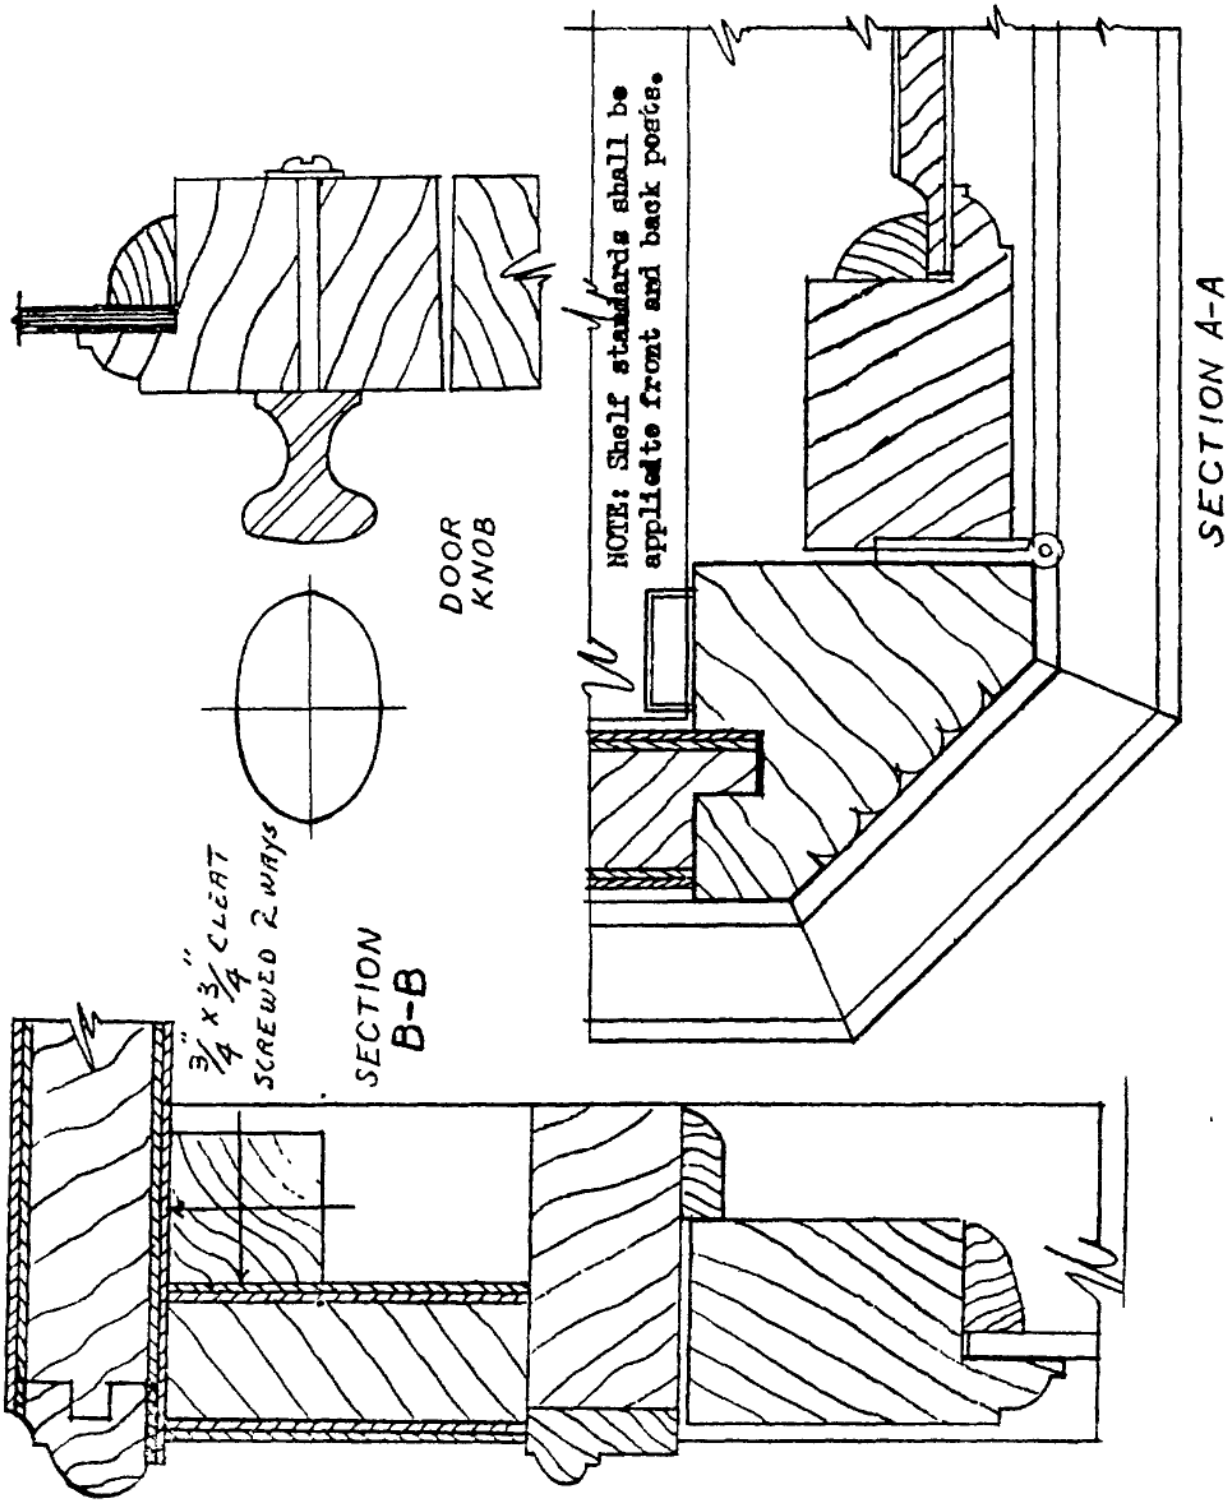


Source: https://assist.dla.mil -- Downloaded: 2026-04-28T11:13:39Z
Check the source to verify that this is the current version before use.

Figure 1(3). Detail of Base

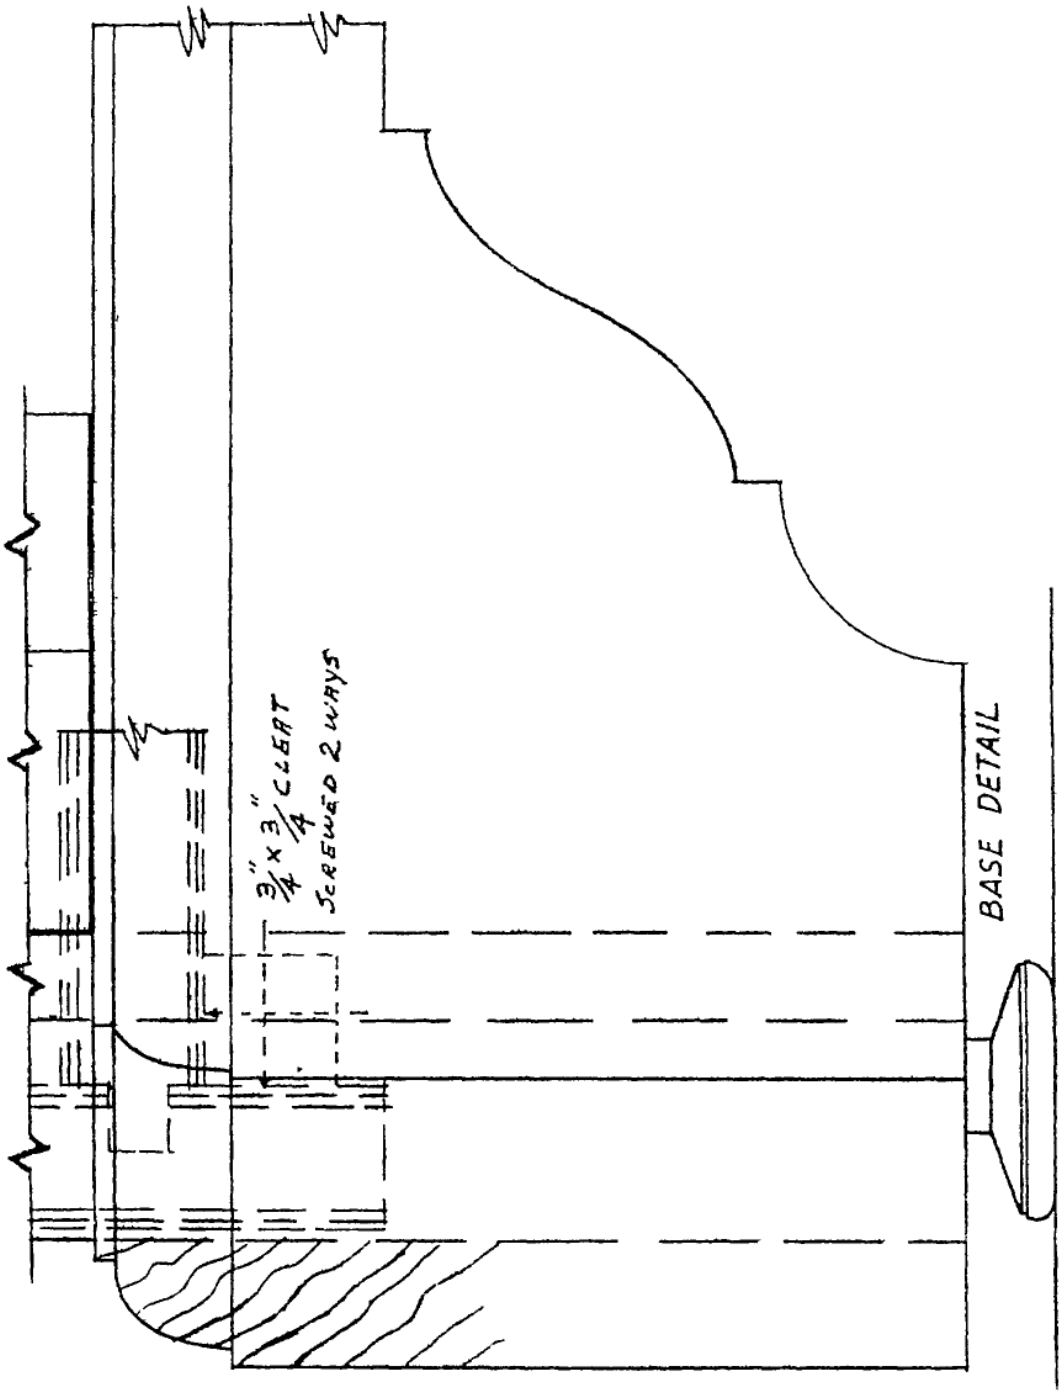


Source: https://assist.dla.mil -- Downloaded: 2026-04-26T11:19Z
Check the source to verify that this is the current version before use.

Figure 1(4). Size 2—Bookcase

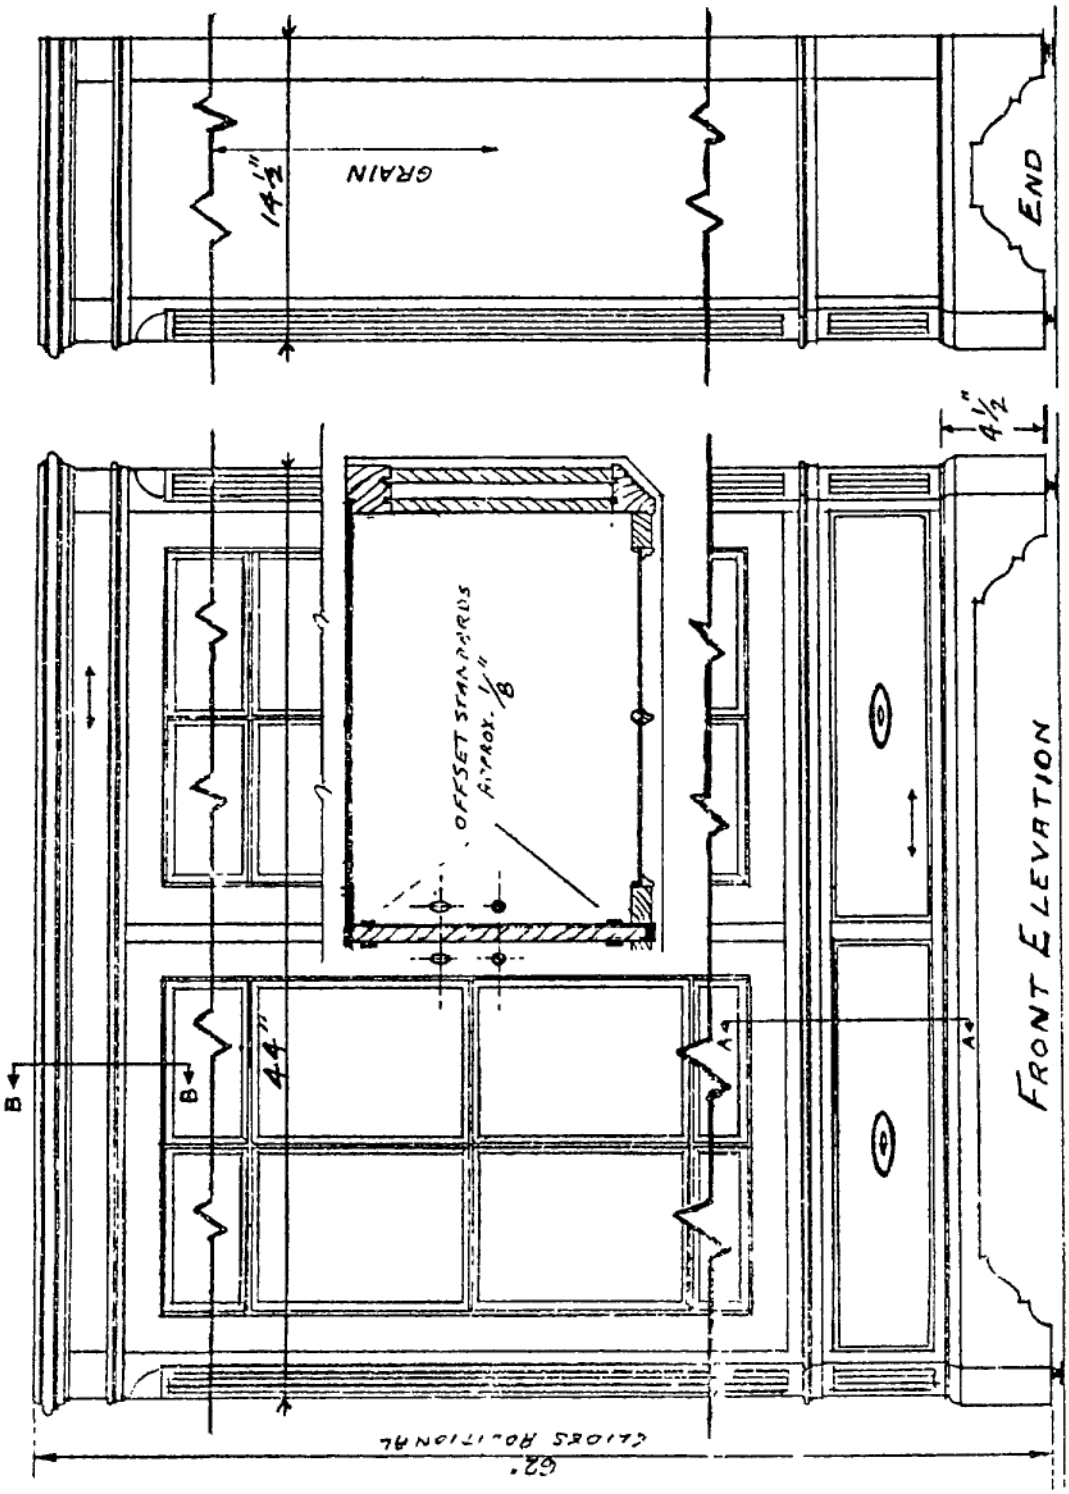


Source: https://assist.dla.mil -- Downloaded: 2020-04-24T13:15Z
Check the source to verify that this is the current version before use.

Figure 1(5). Side Assembly and Drawer Pull

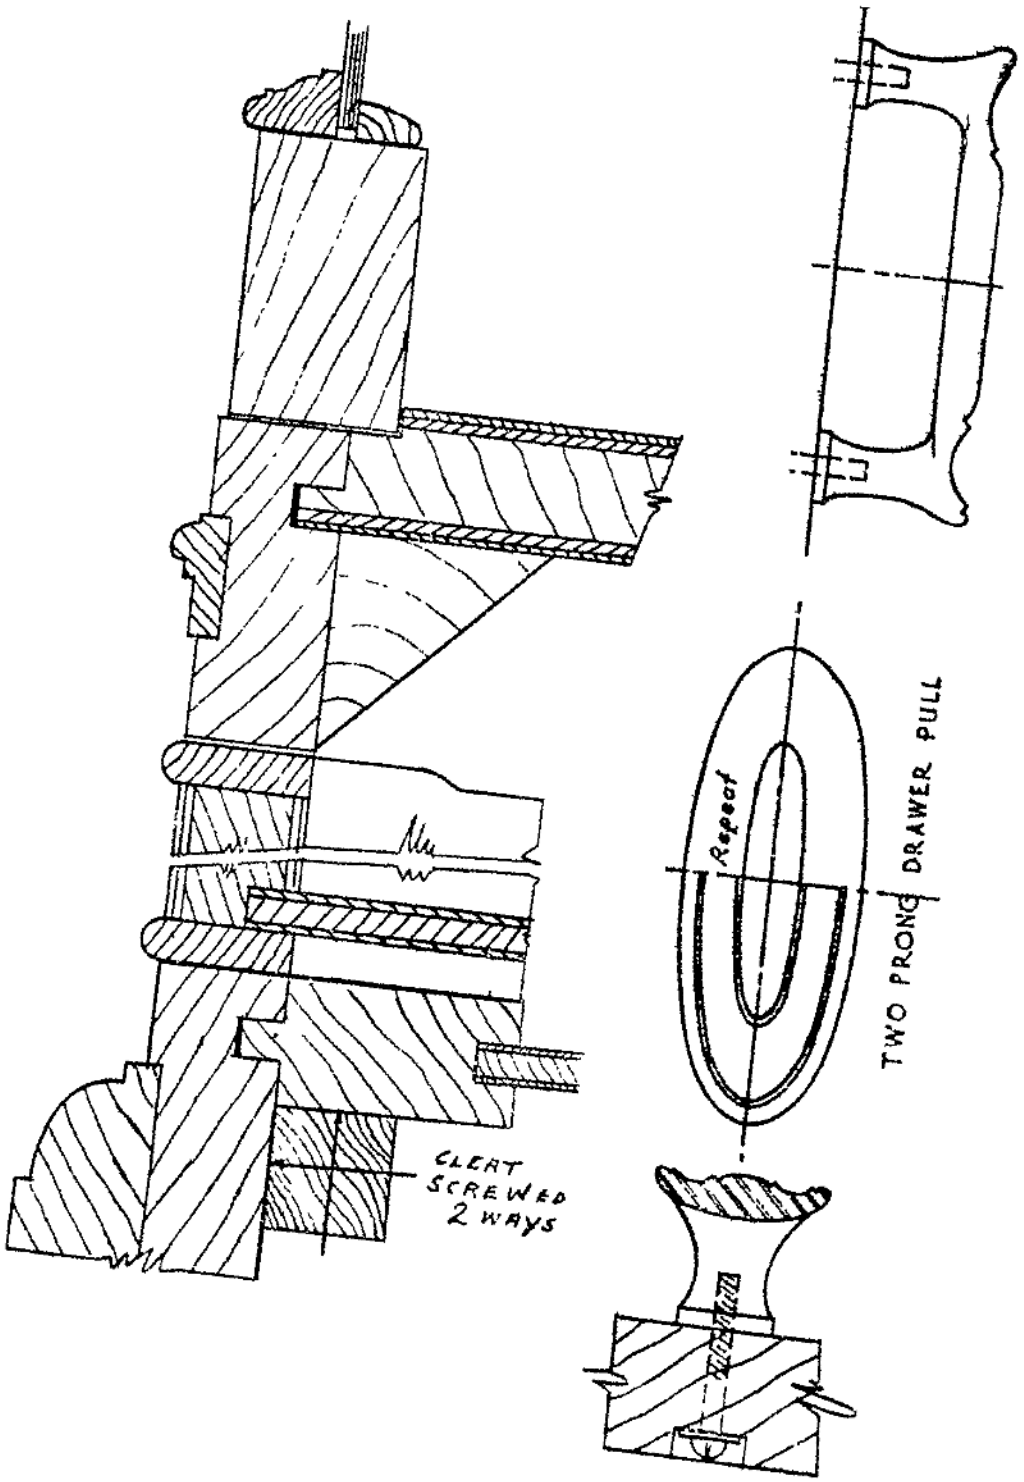

Source: https://assist.dla.mil -- Downloaded: 2020-04-24T13:15Z
Check the source to verify that this is the current version before use.
Source: https://assist.dla.mil -- Downloaded: 2020-10-26T11:39Z
Check the source to verify that this is the current version before use.

Figure 1(6). Section B-B, Corner Detail and Shelf

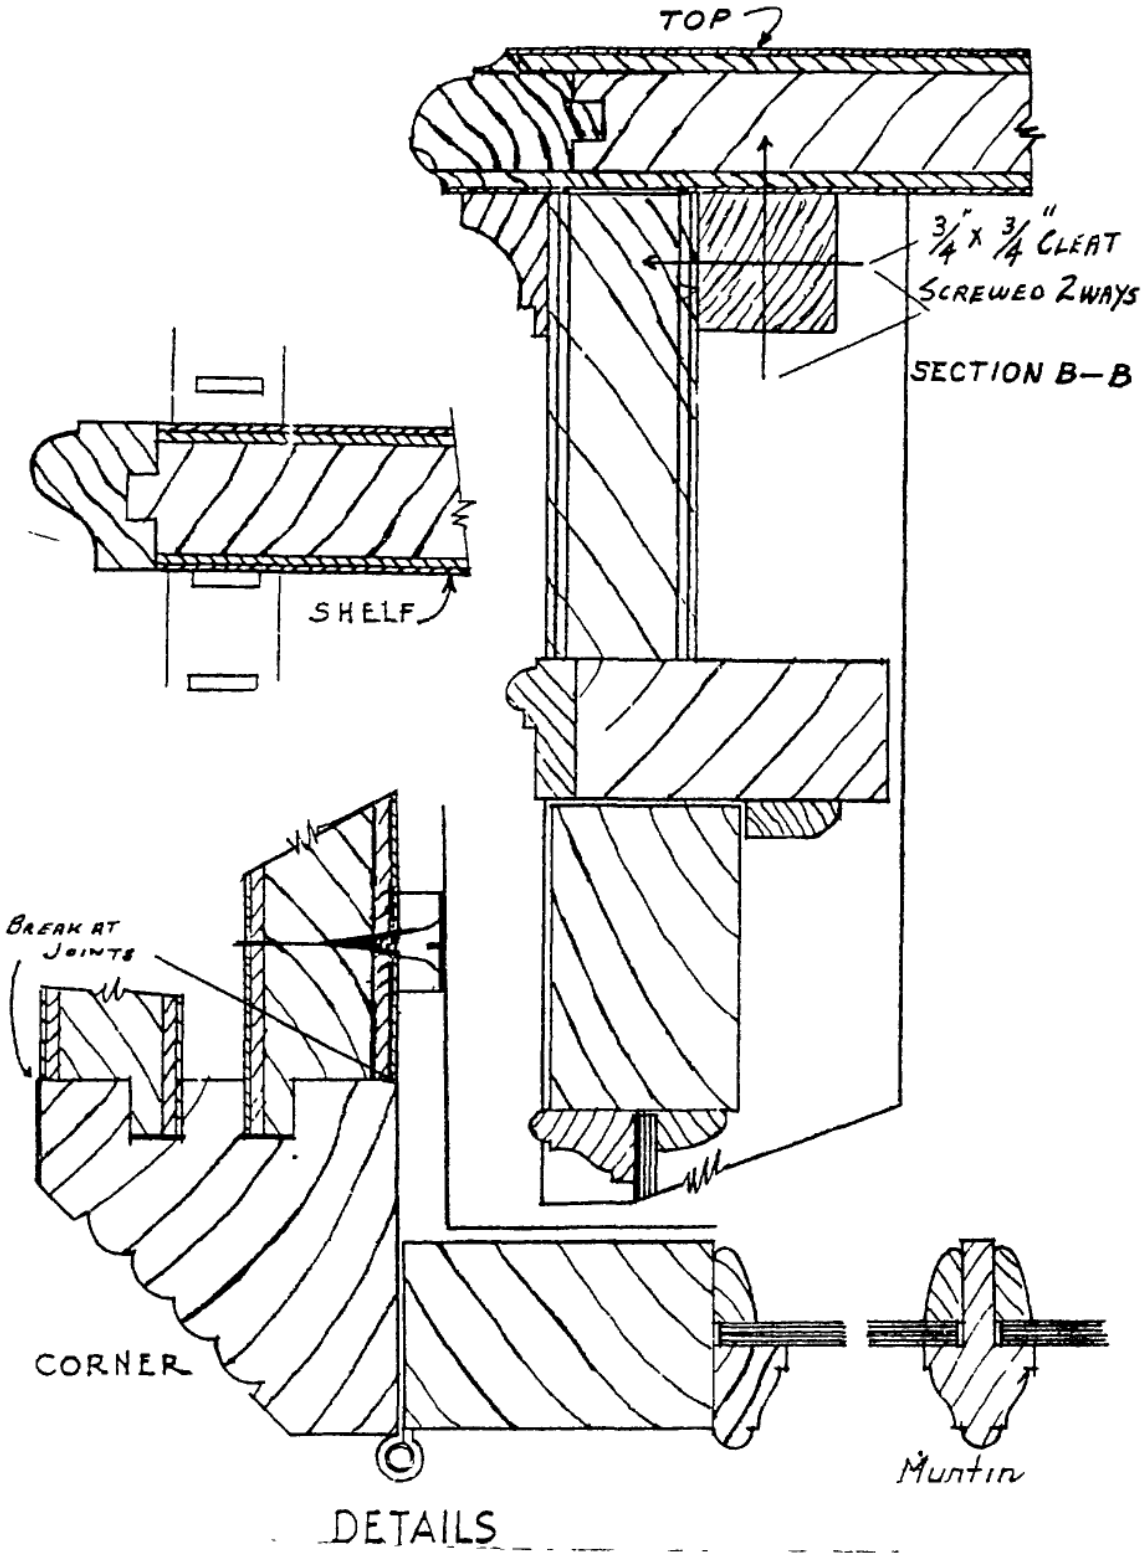

Source: https://assist.dla.mil -- Downloaded: 2026-04-26T13:39Z
Check the source to verify that this is the current version before use.