INCH-POUND

A-A-55111A
November 18, 1993
SUPERSEDING
A-A-55111
December 28, 1992

COMMERCIAL ITEM DESCRIPTION

COAT, ALL-WEATHER, WOMAN'S, w/REMOVABLE LINER

The General Services Administration has authorized the use of this commercial item description in preference to MIL-R-24919.

Abstract. This commercial item description covers the requirements for a woman's all-weather coat made of water-repellant treated polyester/cotton poplin with a removable insulated liner.

Classification. The coat shall be one type in the following sizes and lengths:

Sizes: 6, 8, 10, 12, 14, 16, 18, 20, 22
Lengths: Short, Regular, Long

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FSSD, 2800 South 20th Street, Philadelphia, PA 19101-8419, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8410

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Description. The all-weather coat shall be double breasted with a five button closure, 2 piece front (princess style), one piece back, a lined back yoke, two piece raglan sleeve with a two piece buckled strap at the bottom. The coat shall be fully lined with a one inch center back pleat, and a hanger loop at center back, semi-stand-up collar with pointed ends, button loop shoulder epaulets, two vertical welted pockets, and a detachable 1-3/4 inch wide, minus 1/8 inch tolerance only, waistline belt with a buckle, held by a single loop at left side seam and double loop at right side seam. The belt shall have a buttoned belt anchor on the right side only and a belt loop keeper on the front of the belt 4-1/2 inches from the buckle. The coat shall have a zippered, removable, quilted, insulated liner with sleeves (see Figures 1 and 2).

All seams shall have 8-10 stitches per inch. Front edges, lapels, collar, epaulets, sleeve strap, belt, pocket welts, bottom edge of storm yoke, and lapped seams shall be topstitched 5/16 inch. Bottom hem shall be topstitched 1 inch. All lapped seams shall contain fused seam web material. Sleeve underarm seams (lining and basic fabric) shall be tacked together on the seam allowance for 4 inches starting 5 inches from bottom of cuff. The lining shall be tacked to the shell fabric on the side seam at the hem edge of the coat with a 2 inch anchor loop.

The coat shall have twelve 40-line buttons (5 on each front, 1 as a reinforcement under the third button from the top on the right front, and 1 on inside left facing below combination label) and three 30-line buttons (one on each epaulet and one on inside left facing below the 40-line button). Buttons on left front and inside right front shall be shank wrapped. All front buttons shall have an 18-line reinforcement button sewn underneath except the third button from the top on right front as noted. Each sleeve bottom shall have an 18-line button sewn through the lining only to correspond with a loop on the removable liner sleeve bottom. The belt anchor shall have an 18-line button sewn through all plies.

All front and epaulet buttonholes shall be cut-first, square or tapered-end type, worked-over gimp with ends of gimp pulled through the underside. As indicated by template, five 1-1/4 inch horizontal buttonholes shall be on right front and two on left front (one on lapel and one as anchor buttonhole). Each epaulet shall have one 1-inch horizontal buttonhole. The belt anchor shall have a 3/4-inch cut-first, square or tapered-end buttonhole.

Material. The basic material for the body of the coat shall be water repellant-treated 65% polyester/35% cotton poplin conforming to A-A-50531. The color shall match Blue 3376.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

The material for the removable liner's outer layers, the sleeve binding, the pass-through pockets, and the edge binding shall be a nylon taffeta, CG Blue 3376, continuous filament 70 denier 1.9 (+0.15) oz./sq. yd. with 100 yarns per inch (min.) in the warp direction and 80 yarns per inch (min.) in the filling direction, a minimum breaking strength of 110 lbs. (warp) and 85 lbs. (filling), and a minimum tearing strength of 5.0 lbs. (warp) and 3.5 lbs. (filling). The lining material for the coat shall be a polyester/cotton broadcloth conforming to Type I, Class 3, of A-A-55115, except the colorfastness for wet dry cleaning shall be tested in accordance with AATCC 132. The color shall match Blue 3377. The finished material shall show "good" fastness to perspiration, dry cleaning, and laundering with a wet/dry crocking rating not lower than 3.0 when tested as specified in AATCC Test Methods 15, 132, 61, and 8 respectively.

The material for the batting for the body and the sleeves of the removable insulated liner shall be a thin, lightweight, double scrim batting composed of 65% polyolefin/35% polyester quilted in 5 (± 1/2) inch wide vertical channels between two layers of plain weave nylon taffeta. The batting for the body of the liner shall weigh 4.6 oz./sq. yd. (min.)* and shall be 0.4 inch (min.) thick. The batting for the sleeves of the liner shall weigh 3.1 oz./sq. yd. (min.)* and shall be 0.3 inch (min.) thick. (* Weight excludes scrim.)

Fusible interlining (non-woven). The top collar, pocket welts, facing, sleeve strap (long), epaulets, sleeve hem (cuffs), and belt shall be fused with a non-woven web, made of mechanically entangled fibers thermally bonded together and shall be binder free. The fusible cloth may be composed of 100% polyester fibers or a combination of polyester with nylon or rayon fibers with not less than 50% polyester fibers. The fusible adhesive shall be applied to one side of the web in a uniform dot pattern in accordance with commercial practice. The color shall be black and shall show "fair" colorfastness to dry cleaning (3 cycles). The finished weight of the fusible material shall be a minimum of 1.5 oz./sq. yd.

For optimum results, specific fuse time and settings should be obtained from the manufacturer of the non-woven fusible interlining. The fused sample, consisting of fusible interlining and base fabric, shall show no evidence of bubbling, delamination, change of color, or strike through both initially and after 5 dry cleanings. It shall show a bond strength of 22 ounces per inch of width initially and 17 ounces per inch of width after 5 dry cleanings. (Test results will be considered acceptable if the fusible either splits from itself rather than separates from the outershell material or if it begins to separate from the outershell material higher than the minimum bond strength and splits from itself.) It shall not shrink or elongate more than 2% after 1 dry cleaning.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Fusible interlining (woven). The fusible interlining for the collar stand shall be 100% cotton, plain weave cloth. The cloth shall be black and shall show "fair" colorfastness to dry cleaning (3 cycles). The fusible adhesive shall be applied to one side of the fabric in a uniform dot pattern in accordance with good commercial practice. The finished fusible shall weigh from 5.5 - 6.5 oz./sq. yd.

For optimum results, specific fuse time and settings should be obtained from the manufacturer of the woven fusible interlining. The fused sample, consisting of fusible and basic fabric material, shall show no evidence of bubbling, delamination, color change or strike through after 5 dry cleanings. It shall not shrink or elongate more than 2% after 5 dry cleanings. It shall show a bond strength of 22 ounces per inch of width initially and 17 ounces per inch after 5 dry cleanings.

Seam web. The tape for topstitched seams shall be a polyamide fusible web, 3/8 (± 1/16) inch in width, and shall weigh 1.0 (± 0.2) oz./sq. yd. The color shall be natural and shall show "fair" colorfastness to dry cleaning (3 cycles). For optimum results, fuse time and settings should be obtained from the manufacturer of the fusible tape.

Thread. The thread for seaming and stitching shall be a polyester core thread conforming to type I, sizes 50 or 70 of A-A-50199. Machine tacking shall use size 30. The color shall be shade Blue AB CA 66044 and shall show a "good" colorfastness to wet dry cleaning and light.

Gimp. The gimp for reinforcing buttonholes shall be cotton, Blue AB CA 66044, conforming to size No. 8, type I or II of A-A-50198 and shall show colorfastness to dry cleaning.

Buttons. The buttons shall conform to Type II, Style 20/21, Class K, 18, 30 and 40 line of V-B-871 or equal. The color shall be dark navy, glossy finish with a dull center. The reinforcement buttons shall be 18 line, type II, style 15, shade Black of V-B-871 or equal.

Buckles. The belt and sleeve strap buckles shall be rectangular with rounded corners and a vertical center bar. The buckle shall be of nylon construction with a simulated stitch edge. The color shall be dark Navy, approximating the color of the basic material, with a matte finish. The dimensions shall be in inches as specified below:

	Belt	Sleeve strap
Length (inside)	1-3/4	1
Width (inside)	7/8	5/8
Center bar width	1/4	1/8

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the current version before use.

Frame width	1/4	3/16
Center bar thickness	1/8	1/8
Frame thickness	3/16	3/32
Tolerance:	(+ 1/32)	(+ 1/32)

Slide fastener. The slide fastener for the coat and removable liner shall be Type IV, style 1, size L, short tab pull and aluminum chain, conforming to V-F-106. The tape shall approximate shade Blue 3376 and may be 7/16 or 9/16 inch wide. The ends of the slide fastener shall be equidistant from the bottom edge of the coat.

Labels. Both the coat and removable liner shall have a combination identification personal and instruction label. The coat label shall be sewn on all 4 sides, centered on the left facing approximately 10 inches from the finished bottom edge. The label for the liner shall be sewn on all 4 sides, centered on the back 2 (± 1/2) inches below the neck edge. In addition, both coat and removable liner shall have a size label.

The combination identification personal and instruction label for the coat shall show fastness to dry cleaning and bear the following inscription:

NAME:
COAT, ALL-WEATHER, WOMAN'S, w/REMOVABLE LINER
CONTRACT NO: DLA 100-00-0-0000 (Example)
NAME OF CONTRACTOR:

CARE INSTRUCTIONS: DRY CLEAN ONLY

The combination identification personal and instruction label for the Liner shall be the same as the coat except shall show fastness to laundering and have the following care instructions:

CARE INSTRUCTIONS
Machine Wash Warm, Delicate Cycle, No Chlorine Bleach
Tumble Dry Low Heat
Steam ONLY or Use Cool Iron

OR

Professionally Dry Clean
Tumble Dry Warm and Steam ONLY

The size label shall be centered at neck, caught in stitching so it faces wearer, and shall bear the following inscription:

Size: 12R (Example)
Stock No: 8410-00-000-0000 (Example)

Source: https://assist.dla.mil -- Downloaded: 202640-26T09:42Z
Check the source to verify that this is the current version before use.

NOTE: Abbreviations to be used for the applicable lengths shall be "S" for Short, "R" for Regular, and "L" for Long.

Label/tag. Each item shall be individually bar-coded with the type VIII, class 17 label/tag of DDD-L-20. This label/tag shall be located so that it is completely visible on the item when it is folded and/or packaged as specified and causes no damage to the item.

Pressing. Press collar, fronts, backs, fold of back vent and hems solid, smooth, and flat. Sleeves shall be roll pressed. All wrinkles, creases, or pressing impressions shall be removed. There shall be no excess gloss or scorching.

Patterns. The Government shall furnish a single size pattern. The contractor is responsible for grading patterns for additional sizes. The pattern generally provides for a seam allowance of 1/2 inch for outer shell joining seams 1/4 inch for other stitched seams. The Government patterns shall be used to make the contractor's working patterns. The Government patterns shall not be altered in any way. The working patterns may be modified to accommodate automation. However, if the working patterns are modified, the design and measurements must be maintained as intended by Government patterns.

Measurements. The finished coats shall conform to the following measurements, which are expressed in inches:

Size	Chest (A)	Sleeve Inseam (B)	Center Back Length (C)	Liner Back Length (D)	Belt Length (E)
		SHORT			
6	40	16	41-1/2	30-1/2	42
8	41	16	42	31	43
10	42	16	42-1/2	31-1/2	44
12	43-1/2	16	43	32	45-1/2
14	45	16	43-1/2	32-1/2	47
16	46-1/2	16	44	33	48-1/2
18	48	16	44-1/2	33-1/2	60
20	50	16	45	34	61-1/2
22	52	16	45-1/2	34-1/2	63
		REGULAR			
6	40	17	44-1/2	33-1/2	42
8	41	17	45	34	43
10	42	17	45-1/2	34-1/2	44
12	43-1/2	17	46	35	45-1/2
14	45	17	46-1/2	35-1/2	47
16	46-1/2	17	47	36	48-1/2
18	48	17	47-1/2	36-1/2	60
20	50	17	48	37	61-1/2
22	52	17	48-1/2	37-1/2	63

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Size	Chest (A)	Sleeve Inseam (B)	Center Back Length (C)	Liner Back Length (D)	Belt Length (E)
			LONG		
6	40	18	48-1/2	37-1/2	42
8	41	18	48-3/4	37-3/4	43
10	42	18	49	38	44
12	43-1/2	18	49-1/4	38-1/4	45-1/2
14	45	18	49-1/2	38-1/2	47
16	46-1/2	18	49-3/4	38-3/4	48-1/2
18	48	18	50	39	60
20	50	18	50-1/4	39-1/4	61-1/2
22	52	18	50-1/2	39-1/2	63
Tolerance	(± 3/4)	(± 1/2)	(± 1/2)	(± 1/2)	(± 3/8)

NOTE: Refer to Figure 1 for A, B, C, and E measurements and Figure 2 for D measurements. All measurements shall be taken with coat fully buttoned, placed smooth and flat.

(A) Chest - Twice the measurement shall be taken across front at base of armholes from folded edge to folded edge.

(B) Sleeve Inseam - Measurement shall be taken along sleeve inseam from base of armhole to bottom of sleeve.

(C) Center Back Length - Measurement shall be taken from the neckline seam to bottom edge of coat.

(D) Liner Back Length - Measurement shall be taken from the top edge of neckline to bottom edge of liner.

(E) Belt Length - With belt flat, measure from center of buckle to pointed end of belt.

Workmanship. The finished coats and liners shall be thoroughly cleaned, all loose threads, lint, and foreign matter removed. The liners shall be matched to the proper size coats and assembled together. All seams shall be constructed free of puckering and twists.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Product demonstration model. When required, offerers shall submit samples coats of their intended production. The product demonstration model will consist of units independently developed. Product demonstration models will be analyzed and evaluated by the Government. Evaluation criteria and basis for award are contained in the solicitation. Product demonstration models will be retained by the Government. One (1) product demonstration model approved by DPSC under the resultant contract will serve as a manufacturing standard for the corresponding production items delivered under this contract. Offerers are advised that the product demonstration model does not relieve the successful offerer of his responsibility to perform in accordance with the commercial item description specified above.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

Quality assurance

Responsibility for inspection. The contractor is responsible for ensuring the all-weather coats conform to the requirements of this document and the demonstration model. The contractor is also responsible for both in-process and final inspection for the entire contract quantity. The Government reserves the right to check any item(s) at any time during or after production for design, construction, workmanship, appearance, quality, and conformance to the demonstration model and finished measurements. Defective items shall be replaced by the contractor. Quality control shall be performed in the following areas:

a. Cutting room operations, i.e. top, middle, and bottom layers or parts shall be placed on the pattern for dimensional conformance. A 1/8 inch tolerance shall be allowed on fronts, back, and sleeve parts only, provided the finished part meets the specified requirements.
b. Assembly areas
c. Pressing areas
d. One hundred percent final inspection shall be made for conformance to the approved demonstration model and this document prior to packaging and shipping.

First lot. A first lot consisting of not less than 100 items shall be submitted and inspected for compliance with the design, construction, workmanship, appearance, quality, and dimensional requirements stated herein and with the approved demonstration model.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Certification. The contractor shall certify and maintain substantiating evidence the product offered meets the salient characteristics of this commercial item description and the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract. Reliance on contractor quality assurance systems shall not relieve the contractor of the responsibility of ensuring all products or supplies submitted to the Government for acceptance comply with all requirements of the contract.

End item performance testing

Component testing

Component	Characteristic	Test Method
Polyamide fusible web for seams	Width	5020 1/
	Weight	ASTM D-3776
Woven interlining fused to basic cloth	Construction 2/	3/
	Appearance	Visual
	Weight 2/	ASTM D-3776
	Yarns per inch 2/	
	- Warp	ASTM D-3775
	- Filling	ASTM D-3775
	Bond strength	
	- Initial	AATCC 136
	- After 5 dry cleanings	5580 1/ 4/ & AATCC 136
	Shrinkage	
	- After 1 dry cleaning	5580 1/
Non-woven interlining fused to basic cloth	Construction 2/	3/
	Appearance	Visual
	Weight 2/	ASTM D-3776
	Bond strength	
	- Initial	AATCC 136
	- After 5 dry cleanings	5580 1/ 4/ & AATCC 136
	Shrinkage	
	- After 1 dry cleaning	5580 1/

Source: https://assist.dla.mil -- Downloaded: 20260-26T09:42Z
Check the source to verify that this is the current version before use.

Component testing (cont'd.)

Component	Characteristic	Test Method
All dyed fusible interlinings	Colorfastness - After 3 dry cleanings	5620 1/
Lining material	Construction	3/

1/ FED-STD-191 Test Method
2/ Tested before fused to basic material
3/ A certificate of compliance will be acceptable for this requirement.
4/ Pressing and shrinkage requirements shall not apply.

In-process inspection

Sample size. The size of the fused check sample shall correspond to the total area covered by the facings, top collar, pocket welts, sleeve straps, epaulets, belt and collarstand, which are fused at one time on the press.

Number of check samples. One check sample shall be prepared following fusing of every 100 facings, top collars, pocket welts, sleeve straps, epaulets, belt and collarstands, or one every 4 hours.

Appearance of the fused check sample. Each check sample shall be visually inspected for color change, bleed through, bubbling, and delamination. If there is any evidence of these conditions, the previously fused pieces represented by the sample shall be inspected for the above conditions. Any fused part exhibiting one of the above conditions shall be removed from the lot.

Bond strength. The method of testing shall be as specified below. If the check sample fails the bond strength requirements, the previously fused pieces and check samples shall be refused after the fault has been corrected. If the check sample fails a second time, all fused pieces represented by the sample shall be rejected.

Apparatus and procedures for in-process bond strength testing. The apparatus to be used for this test shall be a commercial-type spring scale accurate to 0.5 oz. The procedure to be followed in performing the test shall be as follows:

(1) Cut three 1 x 8 inch wide strips parallel to the warp direction shall be cut from the right, middle and left sides of the check sample for peel strength testing.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:42Z
Check the source to verify that this is the currentversion before use.

(2) Separate the fusible from the basic fabric at the end of the 1-inch-wide strips for a distance of 2 inches.

(3) Secure the end of the basic fabric to a lightweight clamp-like holder, 1 inch or more in width and approximately 1.0 ounce in weight. Hang the clamp to the end of the spring scale.

(4) Position the fusible in another clamp 1 inch or more in width and approximately 1.0 ounce in weight. Pull the fusible downwards in a vertical direction with a steady continuous motion (motion to be exerted by hand) until complete separation of the fusible from the samples occurs. Take minimum bond strength readings visually from the spring scale. Failure of any individual strap shall indicate failure of the check sample.

NOTE: Care shall be taken not to jerk the fabric during testing.

Examination

Visual examination. The all-weather coats shall be examined for the defects listed below. The lot size shall be expressed in units of item with liner. The sample unit is one item with liner.

Defects. After the finished items are assembled and have been thoroughly cleaned with all loose thread, lint, and foreign matter removed, they shall be examined for the following defects:

Material defects

Any hole; cut; tear; smash; burn; misweave; missing, broken, or loose yarn; visible mend; pleat or crease; needle chew, or drill hole.

Shade variations

Shade bar, dye streak or area of no dye penetration, shaded parts, or thread color not matching basic material.

Cleanness

Any non-removable spot or stain, thread ends not removed or trimmed.

Front or front facing

Excessively full, tight, twisted, or uneven edges.

Collar, lapel, epaulet, or sleeve Straps

Any part not of the same size or shape to correspondent part. Edge of sleeve straps not parallel to bottom edge of sleeve. Epaulets or sleeve straps not laying flat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Pocket
Any pocket out of alignment, welt not uniform in size and shape, opening not smooth and flat.

In the course of the examination, seams suspected of being puckered shall be examined at a distance of three feet in comparison with AATCC photographic standards. Puckering on a major portion of the suspect seam that has a rating of less than 4 for single or double needle seams shall be scored as a puckered seam.

Shoulder/armhole area
Improperly joined.

Topstitching
Any seams not evenly topstitched, twisted or puckered.

Buttons and buttonholes
Any button or buttonhole misplaced, omitted, or not securely stitched; broken stitches, ragged edges, or not as specified. Any button broken, defective (excluding minor surface imperfections on the back side), or incorrectly positioned. Any button not aligned with corresponding buttonhole causing gap, tightness, bulge, twist, or the collar ends to overlap when buttoned.

Buckle
Any buckle omitted, defective (excluding minor surface imperfections on the back side), not as specified, or insecurely stitched.

Belt or hem
Twisted or puckered.

Belt loops, belt anchor, belt keeper, or hanger loop
Omitted, not positioned or attached as specified.

Lining

Twisted, tight, or short.

Fusible
Any fusible tape, or interlining omitted, twisted, exposed, showing evidence of bleed through, bubbling, delamination or color change.

Label
Any label missing, incorrect, illegible, or stitched through printing; size label in liner not same as coat.

Label/tag
Bar code omitted or not readable by scanner; human-readable interpretation (HRI) omitted or illegible; not visible on folded, packaged item; causes damage to the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Liner

Liner tight or short, fronts uneven in length. Binding omitted, twisted, or not securely covering fabric.

Slide fastener

Not as specified, not functioning properly, ends not equidistant to bottom, pull detaches, slider binds or sticks, chain unmeshes, tapes wavy or puckered, coat or liner twisted or distorted when slide fastener is engaged.

Pressing

Wrinkles, creases or pressing impressions not removed. Scorched area.

Measurements

Not within tolerance specified.

Dimensional examination. The finished all-weather coats shall conform to the dimensions specified. Any dimension that is not within the established tolerance shall be classified as a defect. The sample unit shall be one coat with liner.

Packaging examination. An examination shall be made to determine that packaging, packing and marking comply with requirements of this document. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be on the number of shipping containers in the end inspection lot.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, improper taping, or inadequate stapling, bulged or distorted container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Examine	Defect
Content	Number of items per shipping container is more or less than required. Size shown on one or more items not as specified on shipping container.* Polyethylene bag not as specified.

* For this defect, one unit package from each shipping container in sample shall be examined.

Palletization examination. An examination shall be made to determine that the palletization complies with the requirements of this document. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.

Packaging. The all-weather coats shall be hung with fronts lapping, buttoned, and belted on a hanger. The hanger shall be made of high impact polypropylene. The hook of the hanger shall be square. Each coat shall be enclosed in an open bottom polyethylene bag which shall extend beyond the bottom of the item. The top of the bag shall be sealed to fit over the shoulders and shall have a small opening centered at the top to accommodate the hanger hook.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Packing. Ten (10) all-weather coats of one size and length only, preserved as specified, shall be packed in a front loading style fiberboard wardrobe container. The container shall be a regular slotted container made of double wall corrugated fiberboard, grade 350. The front panel shall have a diagonal score or horizontal cut. The dimensions of the container shall approximate 24 x 21 x 48 inches, with appropriate size hanger bar. The container shall be fabricated according to good commercial practice. Three inch wide (min.) fiberglass reinforced plastic adhesive tape shall be used to completely seal the overlapped top flaps of the container and then the butted top flaps. The tape shall be centered over the butted edges of the flaps. A third taping operation shall completely seal the edges of the flaps. The fourth taping operation shall close the front panel along the length of the side opening, and across the bottom cut edge. Reinforcement tape shall be placed in two locations across the side closure, spaced equidistantly from the top and bottom of the panel. A 54-inch high container shall be obtained for customers desiring direct delivery from the supplier to the Training Center.

Marking. Each unit package, shipping container, and palletized unit load shall be marked in accordance with MIL-STD-129. In addition, each side of the container shall be marked in bold, clear lettering not less than two (2) inches high "DO NOT DROP" and "THIS SIDE UP" with arrows pointing to the top of the container.

Palletization. Wardrobe containers shall be placed on pallets whenever total quantity for shipment to one destination exceeds 250 pounds (excluding the pallet) or 20 cubic feet. The containers shall be bonded onto wing type commercial 4-way entry pallets in accordance with load type IA of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding methods C and D or film bonding methods F or G. Pallet pattern shall be in accordance with the appendix of MIL-STD-147.

The pallet shall be 4-way entry, Type IV; Type V, Class 1, Size 2; or Type VIII, fabricated from wood group I, II, III, or IV, Grade A of NN-P-71 or 4-way, Style 1, Size A, Type I, Class 1 fabricated from wood groups specified in MIL-P-15011. Interlocking of loads shall be effected by reversing the pattern of each course.

NOTE: All palletized loads shall contain only one National Stock Number (NSN), to the maximum extent possible. When there is less than a pallet load per NSN, pallets may have containers not of the same NSN, but the pallet shall be clearly marked "mixed" and each applicable NSN shall be listed together with its total quantity.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

Source of Government documents. Copies of military and Federal documents are available from:

Standardization Documents Order Desk
Bldg. 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

Sources of non-Government documents

ASTM D-3775 - Yarns per Inch
ASTM D-3776 - Weight

(Applications for copies should be addressed to American Society For Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AATCC Test Methods

(Applications for copies should be addressed to American Association of Textile Chemists and Colorists (AATCC), P.O. Box 12215, Triangle Park, NC 27709-2215)

Custodian:

Coast Guard - CG
Air Force - 99


Review Activity:
Air Force - 82, 45

Civil Agency Coordinating Activity:
GSA - FSS

Preparing Activity:
DLA - CT

Project No. 8410-0823


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

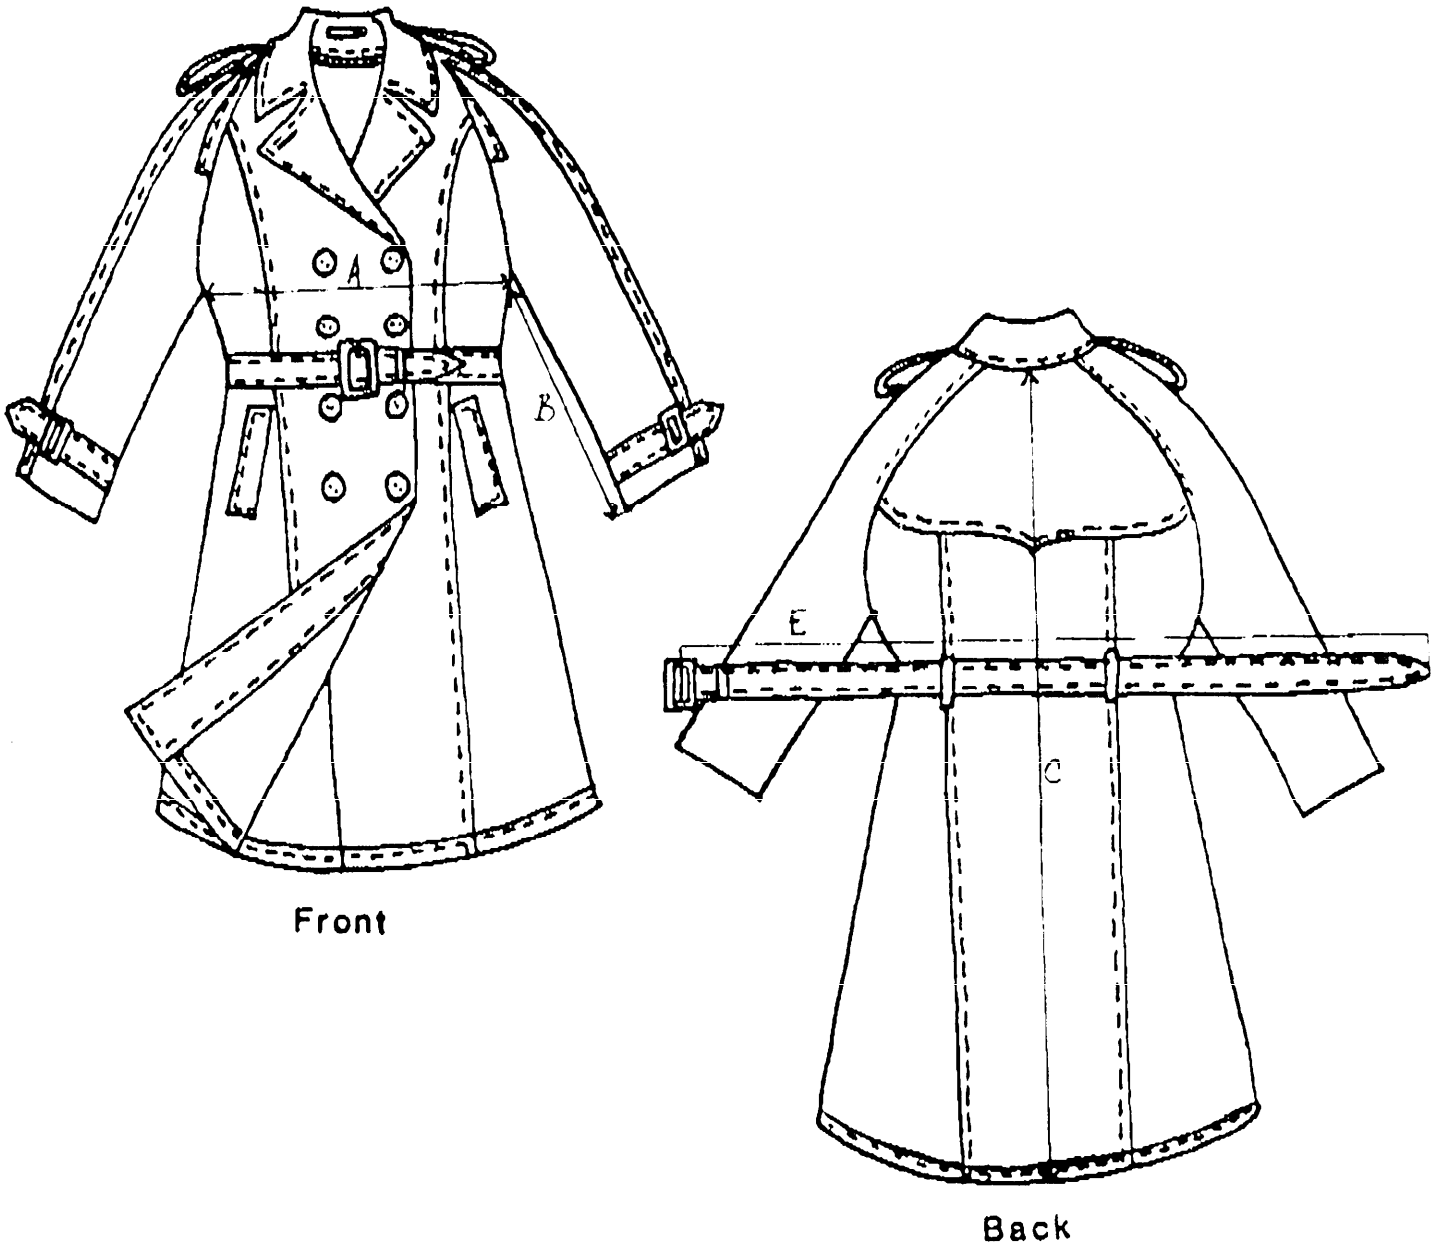

Woman's All-Weather Coat

Figure 1 - Coat, All-Weather, Woman's (w/Removable Liner)

Source: https://assist.dla.mil - Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

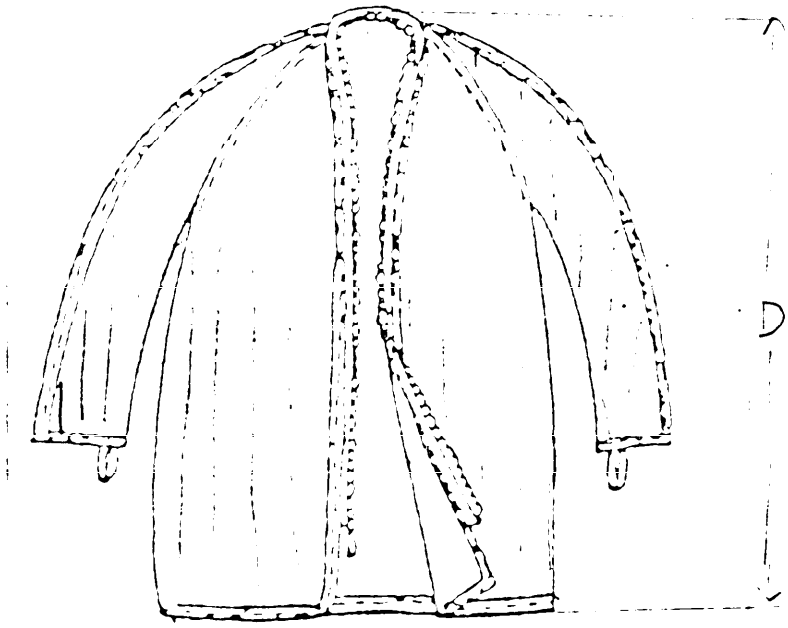

Woman's Removable Quilted Liner

Figure 2 - Coat, All-Weather, Woman's (w/Removable Liner)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	A-A-55111A	93-11-18

3. DOCUMENT TITLE

COAT, ALL-WEATHER, WOMAN'S (w/REMOVABLE LINER)

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
Defense Personnel Support Center ATTN: DPSC-FSSD (12-3-D)	(1) Commercial 215-737-8105	(2) AUTOVON 444-8105
c. ADDRESS (Include Zip Code) 2800 South 20th Street P. O. Box 8419 Philadelphia, Pennsylvania 19101-8419	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:42Z
Check the source to verify that this is the current version before use.