NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/232C
7 July 2021
SUPERSEDING
MIL-DTL-11484/232B
14 September 2016

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, DEFENSE TECHNICAL INFORMATION CENTER

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

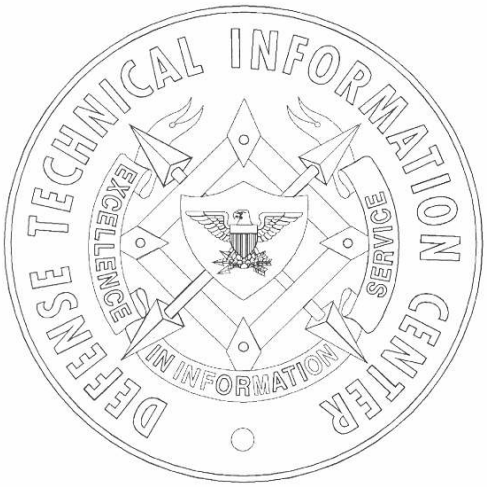

MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH: 24K Gold Plated, Antique with Glossy Black Lacquer and Brightly Polished Highlights.

DIMENSIONS:
DIAMETER: 5/8 inch (REF)
THICKNESS (Thickest point): 0.075 inch $\pm$ 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be a prong with pick and flat ball type clutch.

2. The prong shall be centered on the back of the lapel button and soldered or fused in place.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:31Z
Check the source to verify that this is the current version before use.

NOTE:
The term (REF) refers to the measurements taken from the Government furnished hub or die.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2021-598)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:31Z
Check the source to verify that this is the current version before use.