NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/239
22 March 1996

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, SENIOR TECHNOLOGIST, DOD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

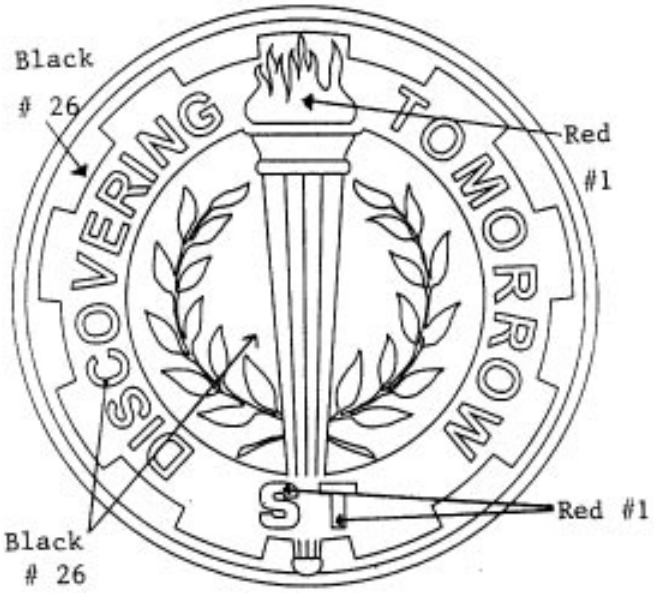

MATERIAL: Red Brass

FINISH: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
DIAMETER: 3/4 inch (1.91 cm) (REF)
THICKNESS (At Thickest Point): 0.075 inch + 0.005 inch (0.191 cm + 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:34Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Enamel areas shall be as indicated. The colors shall conform to the TIOH chip numbers listed below.

COLOR	CHIP NO.
Red	1
Black	26

3. Attaching device shall be prong with pick and a flat ball clutch type. The prong shall be centered on the back of the lapel button and soldered or fused in place.

4. Each lapel button shall be mounted and centered on a blue foam pad 1 inch (2.54 cm) square and approximately 1/2 inch (1.27 cm) thick. The mounting pad shall be placed in a rigid plastic box having a transparent telescoping lid. The box shall be 1-3/16 inch (3.02 cm) square and approximately 1 inch (2.54 cm) high.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0845)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:34Z
Check the source to verify that this is the current version before use.