NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/240A
28 January 1997
SUPERSEDING
MIL-DTL-11484/240
13 May 1996

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, ARMED FORCES SERVICE MEDAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

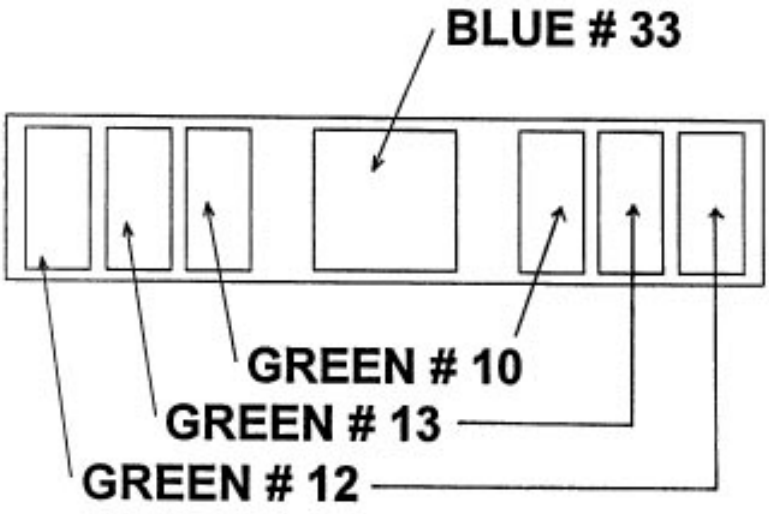

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
HEIGHT (Overall): 9/64 inch (0.36 cm) (REF)
WIDTH (Overall): 21/32 inch (1.67 cm) (REF)
THICKNESS (At Edge): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:34Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Enamel areas shall be as indicated. The colors shall conform to the TIOH chip numbers listed below.

COLOR	CHIP NO.
Green	10
Green	12
Green	13
Blue	33

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Attaching device shall be prong with pick and wing type clutch. The prong shall be centered on the back of the lapel button and fused or soldered in place.

Custodian:
Army - IH
Air Force - 45
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 32, 82, 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-0878)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:34Z
Check the source to verify that this is the current version before use.