MIL-B-1718H
15 September 1986
SUPERSEDING
MIL-B-1718G
19 July 1973

MILITARY SPECIFICATION

BELT, MILITARY POLICE, 1-3/4 INCH WIDE, MAN'S

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers one type of leather waist belt.

* 1.2 Classification. The belts shall be of the following sizes as specified (see 6.2):

Schedule of sizes		
26	36	46
28	38	48
30	40	50
32	42	-
34	44	-

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8465

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

KK-L-271	- Leather, Cattlehide, Strap, Vegetable Tanned
PPP-B-566	- Boxes, Folding, Paperboard
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-676	- Boxes, Setup
PPP-T-45	- Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

MILITARY

MIL-F-10884	- Fasteners, Snap
MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets

DRAWINGS

U.S. ARMY NATICK RESEARCH, DEVELOPMENT, AND ENGINEERING CENTER

2-4-7	- Belt, Military Police, 1 3/4 Inch Wide, Man's

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

* 2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

* 3.2 Materials. The materials shall conform to the referenced documents and requirements specified herein. Recycled material may be used (see 6.5).

3.2.1 Leather. The leather shall be 4/64, 6/64, and 8/64 inch thick as specified on Drawing 2-4-7 and shall conform to type I, II, III, or IV, class 1 of KK-L-271, except that the thickness tolerances shall be plus 1/64 and minus 1/128 inch. The grain side of the leather shall be black, matching the standard sample (see 6.3), and shall be a smooth finish. Embossing or printing shall not be permitted. The color of the flesh side shall be natural.

3.2.2 Sealer. For finishing the edges of the leather, a colorless aqueous solution of a sealer shall be used. Gum tragacanth has been found to be suitable.

* 3.2.3 Fastener, snap. The snap fasteners shall conform to style 2A, finish 2 of MIL-F-10884 and shall consist of the following components: button 1B, socket 3B, stud 4B, and eyelets 6B or 7B and 7B or 8B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

3.2.4 Staple. The staples used for stitching the leather loop shall be formed of flat steel wire approximately 0.055 inch in width by 0.031 inch in thickness. The staple shall have a corrosion resistant finish. The crown length shall be approximately 1/4 inch, and the leg length of the staple shall be such as to ensure a minimum clinch of 1/16 inch and a maximum clinch of 1/8 inch after the staple has penetrated the leather loop.

3.3 Construction. The construction shall conform in all respects to Drawing 2-4-7 and as specified herein.

* 3.3.1 Belt lengths and sizes. The overall length for each belt size, indicated on Drawing 2-4-7 by the letter "L", shall be as specified in table I.

TABLE I. Belt sizes and lengths

Belt size "A" (inches)	Overall length "L" (inches)
26	34
28	36
30	38
32	40
34	42
36	44
38	46
40	48
42	50
44	52
46	54
48	56
50	58

* 3.3.2 Setting of snap fasteners. A hole shall be prepunched through the leather before inserting snap fastener parts. The hole shall be smaller than the outside diameter of the fastener part so that it must be forced through the hole. The fasteners shall be securely clinched. Roll of the clinched eyelet of the assembled fastener component shall not possess more than two scores (splits).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

3.4 Marking. The letters "US"; the manufacturer's name, trade name or trademark of such known characters as are easily identifiable with said manufacturer; the year manufactured; and the belt size shall be indented or legibly stamped with black or red indelible marking ink in the leather in the size of characters and in the location shown on Drawing 2-4-7.

3.5 Replacement of defective components. During the cutting and manufacturing process, components having material defects or damages that are classified as defects in 4.4.3 shall be removed from production and replaced with nondefective and properly matched components.

3.6 Workmanship. The finished belt shall conform to the quality and grade of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

4.1.3 Certificates of compliance. When certificates of compliance are submitted, the Government reserves the right to inspect such items to determine the validity of the certification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase document.

4.4.1.1 Certification. The contractor shall furnish a certificate of compliance certifying that the sealer conforms to the requirements specified in 3.2.2.

* 4.4.2 In-process inspection. Inspection shall be conducted to determine whether prepunching of holes for snap fastener parts is being performed in accordance with 3.3.2. Whenever nonconformance is noted, correction shall be made to the operation and to the items affected.

* 4.4.3 End item visual examination. The end item shall be examined for the defects listed in table II. The lot size shall be expressed in units of belts. The sample unit shall be one completely fabricated belt. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects

Examine	Defects	Classification	
		Major	Minor
Finish:			
Leather components	Not specified color	101	
	Color not uniform		201
	Leather embossed or printed	102	
	Grain side not smooth finished	103	
	Tacky or cracked finish	104	
	Any leather part refinished after assembly; keeper or belt recoated:		
	- seriously affecting serviceability or appearance	105	
	- affecting serviceability or appearance but not seriously		202
Hardware, general	Finish omitted or not as specified, or areas of no finish	106	
	Coating flaked or blistered		203
Material	Any components not fabricated of the specified material	107	
Components and assembly	Any component or assembly omitted or misplaced, operation omitted or not properly performed (i.e., fastener misplaced so that male portion of fastener is not in alignment with female part to effect closure; buckle end of belt not skived on flesh side, or skived to a thickness less than required):		
	- seriously affecting serviceability or appearance	108	
	- affecting serviceability or appearance but not seriously		204
	Not as specified	109	
	Burr or sharp edge	110	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects - Continued

Examine	Defects	Classification	
		Major	Minor
Components and assembly - continued	Any part fractured, ripped, punctured, torn, defective, malformed, or damaged:		
	- seriously affecting serviceability or appearance	111	
	- affecting serviceability or appearance but not seriously		205
	Belt not fabricated with grain side on exterior of belt	112	
	Not creased and edged, or irregularly creased and edged affecting appearance		206
Quality of leather	Not full grain or not full grain lightly snuffed	113	
	Hole where not required, cut, or rupture	114	
	Brand mark, healed grub damage, scar tissue, hip mark, brittle or bony area:		
	- seriously affecting serviceability or appearance	115	
	- affecting serviceability or appearance but not seriously		207
	Abraded, scratched, or other grain damage:		
	- seriously affecting serviceability or appearance	116	
	- affecting serviceability or appearance but not seriously		208
	Flanky, spongy, pipey, or stretchy leather:		
	- seriously affecting serviceability or appearance	117	
	- affecting serviceability or appearance but not seriously		209

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects - Continued

Examine	Defects	Classification	
		Major	Minor
Quality of leather - continued	Any wrinkle:		
	- seriously affecting serviceability or appearance	118	
	- affecting serviceability or appearance but not seriously		210
	Slaughter cut:		
	- seriously affecting serviceability or appearance	119	
	- affecting serviceability or appearance but not seriously		211
	Flesh side not smooth, or contains areas of loose flesh		212
Snap fastener	Fastener not functioning properly (i.e., fails to snap closed to provide a secure closure or to open freely)	120	
	NOTES: a. Incomplete roll of the end of the socket eyelet tube or stud eyelet tube is evidence of improper and insecure clinching. Fasteners evidencing incomplete roll will separate in use.		
	b. The fastener shall be snapped and unsnapped twice to determine whether parts of fastener separate freely and also effect a secure closure.		
	Clinched excessively tight, cutting surrounding material	121	
	Clinched loosely, permitting components to rotate freely in the hole in the material	122	
	Roll of clinched eyelet fastener assembly contains more than two scores (splits)		213

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects - Continued

Examine	Defects	Classification	
		Major	Minor
Staples	Staples not properly clinched so that belt loop may separate in service or prong may be injurious to user	123	
	Staples not properly clinched, but will adequately retain belt loop and will not be injurious to user		214
Marking	Omitted, incomplete, incorrect, not legible, not specified size or color, not in proper location, or not accomplished as specified		215
Cleanness	Any nonremovable stain or spot	124	
	Any spot or stain removable with cleaning agent		216

* 4.4.4 End item dimensional examination. The end item shall be examined for the dimensions specified on Drawing 2-4-7, except that the overall length shall be as specified in table I and the tolerance as specified on the drawing. Any dimension not within the specified tolerance shall be scored as a defect. The lot size shall be expressed in units of belts. The sample unit shall be one completely fabricated belt. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

Examine	Defect
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as incomplete sealing or closure of flap, improper taping, loose strapping, or inadequate stapling Bulged or distorted container
Content	Number of intermediate containers is more or less than specified Number of belts per intermediate container is more or less than specified 1/

1/ For this defect one intermediate container shall be examined.

* 4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

* 5.1.1 Level A. Ten belts of one size only shall be coiled and unit packed in a paperboard box as shown on figure 1. The box shall be a folding paperboard box conforming to variety 1, style III, type G, class 1 of PPP-B-566; or a setup paperboard box conforming to type I, variety 1, class A, style 4 of PPP-B-676. Inside dimensions of each paperboard box shall be 12 inches in length, 10 inches in width, and 2 1/8 inches in depth. The box closure shall be secured with 2-inch minimum width gummed paper tape conforming to type III, grade B, of PPP-T-45 applied at the center of the length opening and extending along the bottom and up each side at least 1 1/2 inches.

* 5.1.2 Commercial. Belts shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial, as specified (see 6.2).

* 5.2.1 Level A packing. One hundred belts of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Level A unit packs shall be packed flat two in length, one in width, and five in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 20 1/2 inches in length, 12 1/2 inches in width, and 11 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5. Toward the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

5.2.2 Level B packing. One hundred belts of one size only, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A unit packs shall be packed flat two in length, one in width, and five in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 20 1/2 inches in length, 12 1/2 inches in width, and 11 inches in depth. Approximate dimensions are furnished

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

as a guide only. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5. Toward the end of the contract or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2.1 Weather-resistant shipping containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Belts, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), belts, packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 102 in accordance with the appendix of MIL-STD-147.

* 5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

* 5.4.1 Labels, mixed sizes. Each shipping container, packed with mixed NSN's only, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches with the words "MIXED NSN's" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity and NSN's contained therein.

6. NOTES

6.1 Intended use. The belt is designed for use by Military Police of the Army and Air Force, and for use by the Marine Corps.

* 6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Sizes required (see 1.2).
c. When a first article is required (see 3.1, 4.3, and 6.4).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 Standard sample. For access to samples, address the contracting officer issuing the invitation for bids (see 3.2.1).

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical, as long as it meets the requirements of this document (see 3.2).

* 6.6 Subject term (key word) listing.

Belt
Military police
Police equipage

6.7 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, as written, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - MC
Air Force - 99

Preparing activity:

Army - GL

Project No. 8465-0928

Review activities:

Army - MD
Air Force - 82
DLA - CT

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

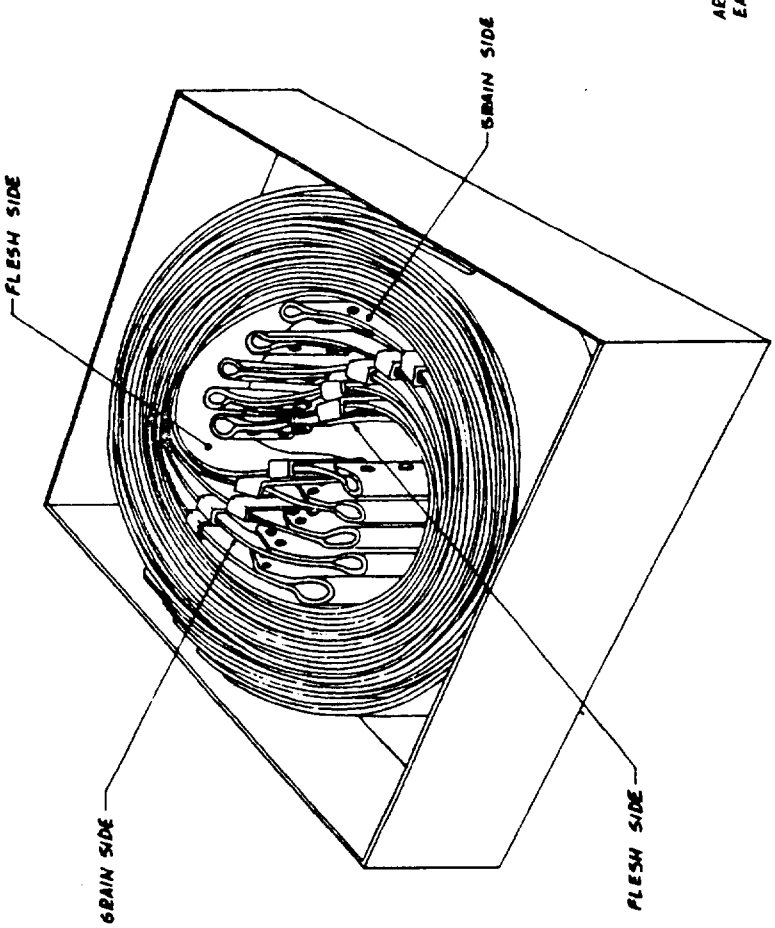


Figure 1. Arrangement of Belts in Box

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
US Army Natick Research and Development Center
Natick, Massachusetts 01760

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Center
ATTN: STRNC-ES
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-B-1718H	Belt, Military Police, 1-3/4 Inch Wide, Man's

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:41Z
Check the source to verify that this is the current version before use.