MIL-C-1700B

30 April 1970
SUPERSEDING
MIL-C-1700A
28 June 1963

MILITARY SPECIFICATION

CHEST: TOOL, GASOLINE FIELD RANGE ACCESSORY OUTFIT

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type and size of metal tool chest for the field range accessory outfit.

* 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-630	-	Steel, Bar, Carbon, Hot Rolled, (Merchant Quality)
QQ-S-775	-	Steel Sheets, Carbon, Zinc-Coated
QQ-W-461	-	Wire, Steel, Carbon (Round, Bare and Coated)
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements For
PPP-B-636	-	Box, Fiberboard
PPP-T-60	-	Tape; Pressure-Sensitive Adhesive, Waterproof for Packaging

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables For Inspection by Attributes
MIL-STD-129	-	Marking For Shipment and Storage
MS 27969	-	Hasp, Hinged-Open With Fixed Staple, Hardware, Builder's, Miscellaneous, Steel

FSC 7310

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:38Z
Check the source to verify that this is the current version before use.

DRAWINGS

ARMY NATICK LABORATORIES

5-11-76	-	Chest, Tool, Gasoline Field Range Accessory Outfit Assembly and Details
5-11-77	-	Chest, Tool, Gasoline Field Range Accessory Outfit, Details

(Note: Miniature copies of Drawings 5-11-76 and 5-11-77 identified as figures 1 and 2, respectively, are attached for information purposes only.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply:

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N. W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

3.1 First article.- This specification contains provisions for first article examination and approval (see 4.2, 6.2, and 6.3).

* 3.2 Materials.- The materials shall be as specified herein and on the drawings. Materials not definitely specified shall be of the quality normally used by the manufacturer for tool chests, provided the completed item complies with all provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:38Z
Check the source to verify that this is the current version before use.

* 3.2.1 Steel sheet and strip, carbon, zinc coated.- The zinc coated carbon steel sheet and strip shall conform to type I, class d of QQ-S-775.

3.2.2 Steel wire.- Steel wire shall conform to steel number 1020, finish 1 of QQ-W-461.

* 3.2.3 Steel, bar, carbon, hot rolled.- The carbon steel bar shall be hot rolled merchant quality conforming to grade M-1010 thru grade M-1020 bar size angle of QQ-S-630.

* 3.3 Construction.- The construction of the chest shall conform to the design dimensions and details shown on Drawings 5-11-76 and 5-11-77, and to the requirements specified herein. Except for components specified herein and on drawings, the tool chest shall be fabricated from zinc coated steel specified in 3.2.1. The thickness shall be as specified on drawings.

* 3.3.1 Handle and hinge pin.- The handle and hinge pin shall be fabricated from bare steel wire specified in 3.2.2 and the size specified on applicable drawing.

* 3.3.2 Shelf.- The shelf shall be fabricated from bar size angle in accordance with material specified in 3.2.3 and of the size specified on applicable drawing.

3.3.3 Hasp, hinged.- The steel hinged hasp shall be of the size shown on Drawing 5-11-76 and shall conform to MS 27969.

* 3.4 Finish.- Steel component parts of the chest, and hardware not fabricated from zinc coated steel shall be zinc plated in accordance with type I, class 2 of QQ-Z-325.

3.5 Marking for identification.- Marking shall be in accordance with the size, style, location and method of application shown on Drawing 5-11-77.

* 3.6 Workmanship.- All metal surfaces shall be free from burrs, slivers, rough or sharp edges. Components shall not be broken, cracked, dented or malformed. The completely assembled tool chest shall not have any unplated areas.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:38Z
Check the source to verify that this is the current version before use.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for the defects listed in table I and dimensions specified. The presence of any visual defect, or any dimension not within the specified requirements, shall be cause for rejection of the preproduction sample.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

* 4.3.1 Component and material inspection.- In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

* 4.3.2 End item inspection.- The lot shall consist of all the complete tool chests offered for inspection at one time. The sample unit shall be one complete tool chest.

* 4.3.2.1 Visual examination.- The end item shall be examined for defects listed in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I.- Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Any unplated area.	X	
	Finish not as specified.	X	
Construction and workmanship	Any part or component missing or not as specified.	X	
	Component missing.	X	
	Component broken, cracked or malformed.	X	
	Sharp burr or sliver.	X	
	Any part unusually out of square.	X	
	Chain not attached.	X	
	Rivets not peened or loose.		X
	Handle and retainer not attached properly.	X	
	Handle does not rotate freely.		X
Marking	Missing, incomplete, incorrect, not legible, not size specified, not in proper location or not embossed.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:38Z
Check the source to verify that this is the current version before use.

* 4.3.2.2 Dimensional examination.- Examination shall be made of the end item to determine compliance with dimensions specified. Any deviation therefrom shall constitute a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.3.3 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be as indicated in table II. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the containers offered for inspection at one time. The inspection level shall be S-2 and the acceptable quality level shall be 4.0, expressed in terms of defects per hundred units.

TABLE II.- Examination of preparation for delivery

Examine	Defect
Marking	Omitted; incorrect; illegible, of improper size, location, sequence, or method of application.
Materials	Component missing or damaged or otherwise defective.
Workmanship	Inadequate application or components, such as bulging or distortion of interior boxes and shipping containers.
Contents Number per container is more or less than required.	

* 4.3.3.1 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure and strapping shall be in accordance with the appendix of that specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- The compartment in the cover of the chest shall be securely latched. The cover of each chest shall be closed and secured in place by means of the hasp and snap. Each snap and chain shall then be wrapped with tape conforming to type optional, class 1 or 2 of PPP-T-60. Each chest shall then be packaged in a snug-fitting fiberboard box conforming to type CF (variety SW) or SF, class domestic, grade 175, style RSC of PPP-B-636. Each box shall be securely closed.

* 5.1.2 Level C.- Chests shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:38Z
Check the source to verify that this is the current version before use.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Four chests packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to grade V2s, style RSC of PPP-B-636. Each shipping container shall be closed, water-proofed by means of tape, and reinforced in accordance with the appendix of PPP-B-636.

* 5.2.2 Level B.- Four chests, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF (variety SW) or SF, class domestic, grade 275, style RSC of PPP-B-636. Closure shall be in accordance with Method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V4s or V3s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix thereto.

* 5.2.3 Level C.- Chests, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The metal tool chest covered by this specification is intended for use in the storage of spare parts furnished with field range accessory outfit.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) First article (see 3.1, 4.2 and 6.3).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

6.3 First article.- The item covered by this specification requires first article examination and approval under the appropriate provisions of paragraph 7-104.55 of the Armed Services Procurement Regulations. The first article should be a preproduction sample consisting of one unit. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examination and approval of the first article.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:38Z
Check the source to verify that this is the current version before use.

6.4 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - YD
Air Force - 84

User activity:


Navy - MC

Preparing Activity:

Army - GL

Project No. 7310-0312

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:38Z
Check the source to verify that this is the current version before use.

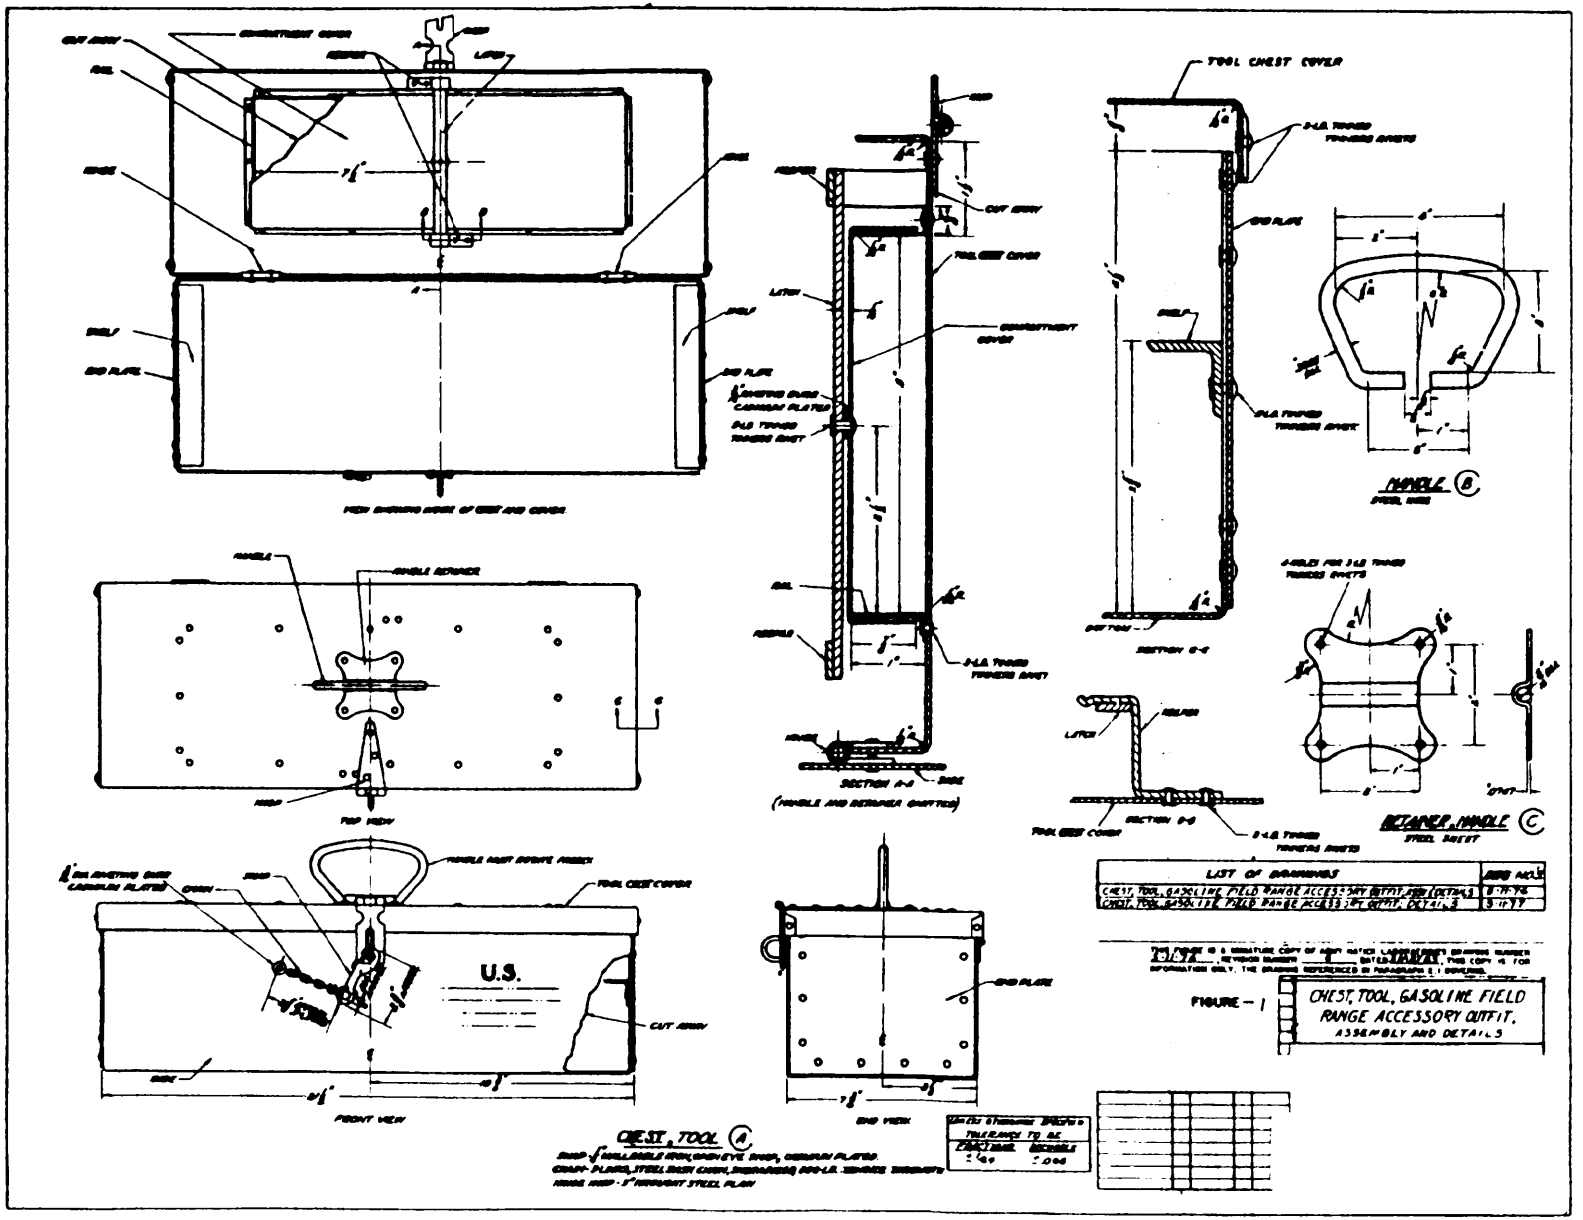

LIST OF DRAWINGS	
CHEST, TOOL, GASOLINE FIELD RANGE ACCESSORY OUTFIT (DETAILS)	8-78-76
CHEST, TOOL, GASOLINE FIELD RANGE ACCESSORY OUTFIT, DETAILS	8-78-77

FIGURE - 1 CHEST, TOOL, GASOLINE FIELD RANGE ACCESSORY OUTFIT, ASSEMBLY AND DETAILS

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:38Z
Check the source to verify that this is the current version before use.

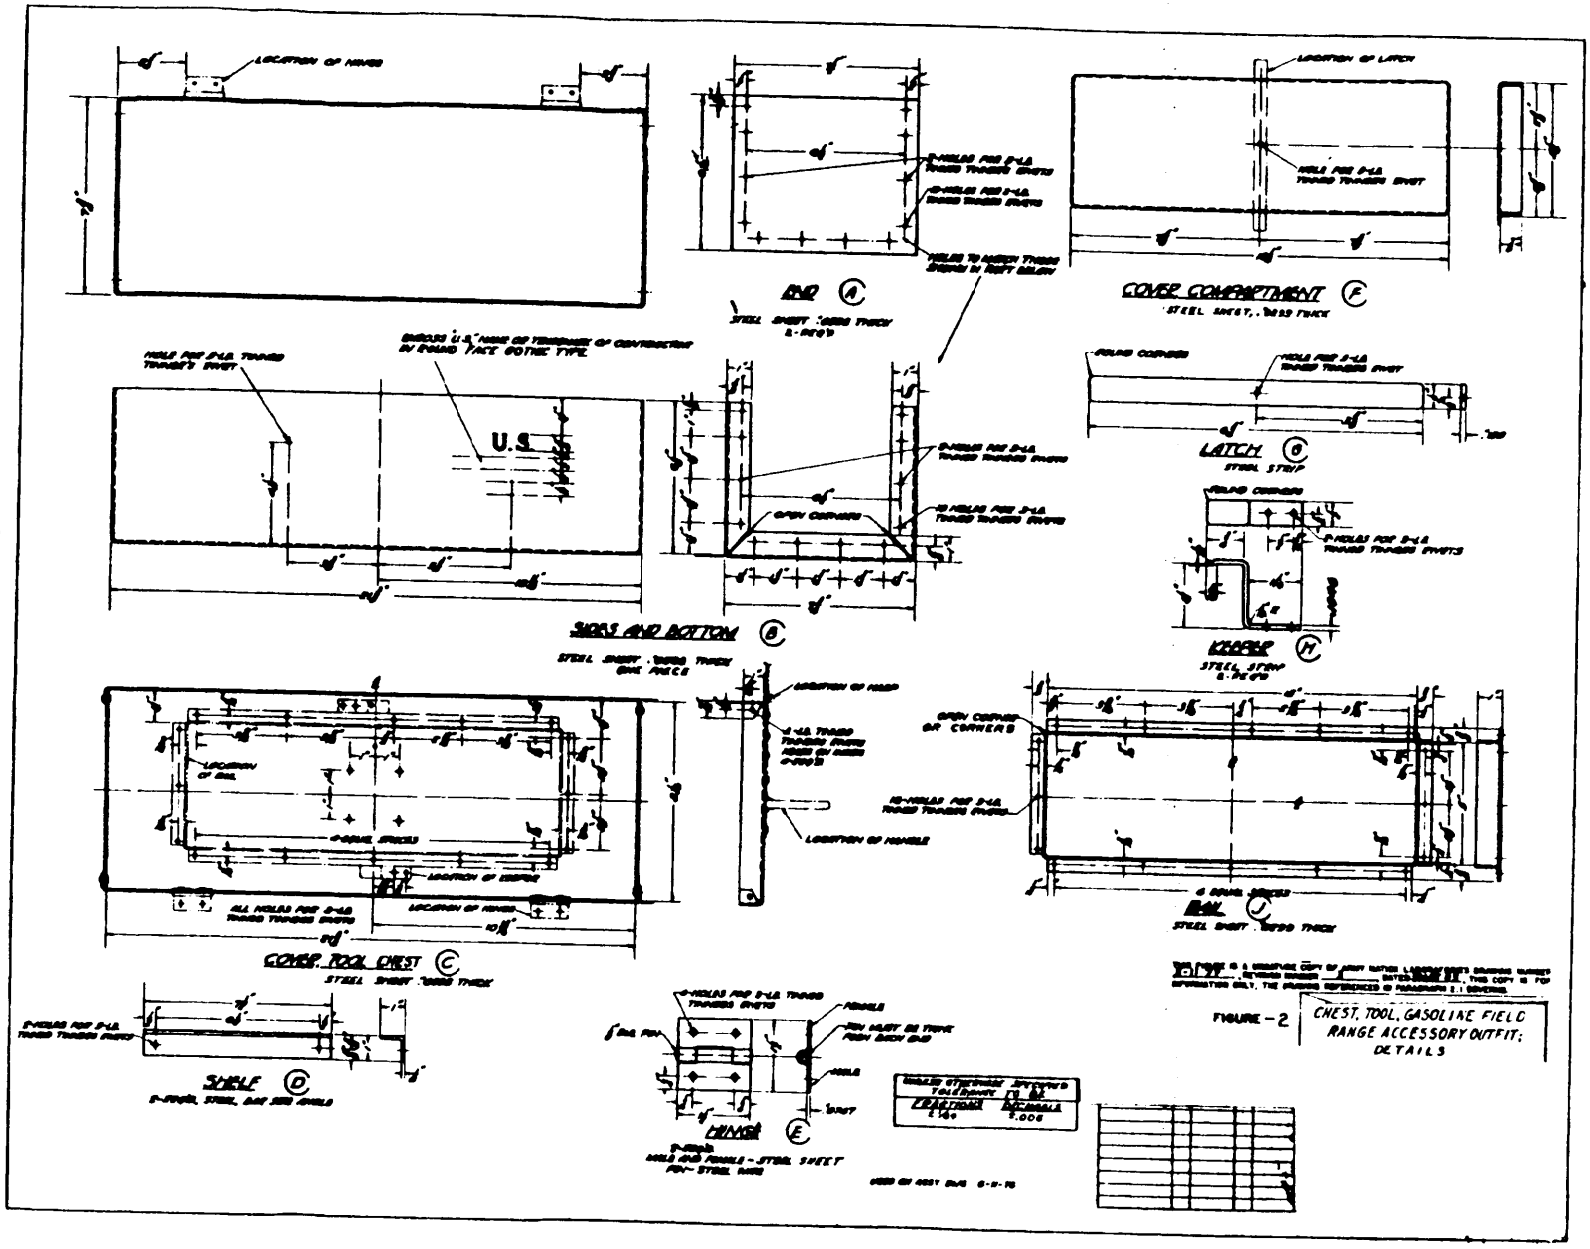


FIGURE – 2 CHEST, TOOL, GASOLINE FIELD RANGE ACCESSORY OUTFIT: DETAILS

☆ U. S. GOVERNMENT PRINTING OFFICE: 1970-393-097/5-5845

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:38Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-C-1700B - Chest: Tool, Gasoline Field Range Accessory Outfit

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:38Z
Check the source to verify that this is the current version before use.