MIL-P-1577D
30 September 1976
SUPERSEDING
MIL-P-1577C
30 December 1966

MILITARY SPECIFICATION

PANEL MARKER, RED CROSS, 8 FEET, 6 INCHES BY 19 FEET, 6 INCHES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers one type of Red Cross panel marker, 8 feet 6 inches long by 19 feet 6 inches wide, made from laminated vinyl-nylon cloth.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents.- The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS
FEDERAL
V-T-285 - Thread, Polyester
PPP-B-636 - Box, Shipping, Fiberboard
MILITARY
MIL-L-1709 - Line, Tent
MIL-S-1734 - Slip, Tent Line
MIL-G-16491 - Grommet, Metallic
MIL-C-43006 - Cloth and Strip Laminated, Vinyl Nylon High Strength, Flexible

STANDARDS
FEDERAL
FED-STD-191 - Textile Test Methods
FED-STD-751 - Stitch, Seam, and Stitching
MILITARY
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

BENEFICIAL COMMENTS (RECOMMENDATIONS, ADDITIONS, DELETIONS) AND ANY PERTINENT DATA WHICH MAY BE USED IN IMPROVING THIS DOCUMENT SHOULD BE ADDRESSED TO: DIRECTOR, THE INSTITUTE OF HERALDRY, US ARMY, CAMERON STATION, ALEXANDRIA, VA 22314, BY USING THE SELF-ADDRESSED STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL (DD FORM 1426) APPEARING AT THE END OF THIS DOCUMENT OR BY LETTER.

/FSC 8345/

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

DRAWINGS
THE INSTITUTE OF HERALDRY
5-1-380 - Panel Marker, Red Cross, Laminated Vinly-Nylon Cloth, 8'6" by 19'6"

(Figure 1 is a miniature reproduction of the referenced drawing and is attached for information only.)

(Copies of specifications, standards, and drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Standard samples.- Unless otherwise specified (see 6.2), the contracting officer shall furnish standrad samples of the laminated vinyl-nylon cloth (both red and white), the thread and markings required.

3.2 First article sample.- When specified (see 6.2), before production is commenced, one sample of the finished panel marker shall be furnished or made available to the contracting officer or his authorized representative for inspection and/or testing as specified in 4.2. Approval of the first article sample authorizes the commencement of production but does not relieve the contractor of responsibility for compliance with all provisions of this specification. The first article shall be manufactured in the same facilities to be used for the manufacture of the production item.

3.3 Materials.- Materials shall conform to the referenced specifications and the requirements specified herein.

3.3.1 Cloth laminated, vinyl-nylon.- The laminated, vinyl-nylon cloth for the panel marker shall conform to type II, class 2, form 1 of MIL-C-43006. The coated cloth for the cross portion of the marker shall be red shade 22136. The field portion of the marker shall be white shade 27875.

3.3.2 Slips, tent.- The tent slips shall conform to type II of MIL-S-1734.

3.3.3 Thread, polyester.- The polyester thread shall be natural (undyed) conforming to type I of V-T-285. The thread sizes shall be as follows:

For all stitching, except stitching indicated by "Z" on drawing. . Size F for needle and bobbin

For all stitching indicated by "Z" on drawing. . . . . Size F for needle and size E for looper

3.3.4 Tent lines.- The tent lines for the marker shall conform to MIL-L-1709. The types and classes shall be as follows:

For corner lines. . . . . type XXIV, class A
For guy lines. . . . . .type XXXVIII, class A

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

3.3.5 Grommet.- The grommets shall conform to type III, class 3 of MIL-G-16491.

3.4 Construction.- The panel marker shall be constructed in accordance with the details and dimensions of drawing 5-1-380 and the requirements specified herein. The panel marker shall be fabricated from vinly-nylon laminated cloth specified in 3.3.1. The grommets specified in 3.3.5, shall be set by punching a hole through the material which is smaller than the outside diameter of the grommet barrels. Each of the grommet barrels shall be forced through the holes and securely clinched without cutting the material.

3.4.1 Stitching.- All stitching shall be in accordance with FED-STD-751, using thread specified in 3.3.3. For all stitching except stitching indicated by a "Z" on the drawing, a type 301 stitch shall be used with 5 to 7 stitches to the inch. For all stitching indicated by "Z" on the drawing a type 401 stitch shall be used with 5 to 7 stitches to the inch. When a 401 stitch is used, the chain portion of the stitching shall not appear on theface side of the marker. All thread ends shall be trimmed.

3.4.1.1 Type 301 stitching.- When a type 301 stitch is used, thread breaks shall be backstitched not less than one inch at each break. Except where ends are turned under in a hem or held down by other stitching, stitching ends shall be backstitched 1/2 inch to prevent raveling. Thread tension shall be maintained so that there will be not loose stitching and so that the lock will be imbedded in the center of the material sewn.

3.4.1.2 Type 401 stitching.- When a type 401 stitch is used, thread breaks shall be overstitched not less than 1-1/2 inches at each break. The thread tension shall be maintained so that there will be no loose stitching.

3.5 Repairs.- Repairs whenever necessary and when authorized by the contracting officer, shall be effected by securely cementing or sewing a patch of the same color material to the damaged area.

3.6 Marking.- The letters "US", identification marking and any marking required by the applicable drawing shall be imprinted or stencilled in the locations shown on the drawing. When tested as specified in 4.4, all marking shall show fastness to weathering equal to or better than the standard sample (see 3.1). If no standard sample is available, the marking shall show good fastness to weathering. The identification marking shall be as follows:

APPROVED NOMENCLATURE
STOCK NUMBER
NUMBER AND DATE OF CONTRACT

3.7 Workmanship.- The panel marker shall be clean, well made and shall meet the acceptable quality level established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract or purchase

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

order, the supplier may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to the prescribed requirements.

4.2 First article sample inspection.- When first article samples are required, the completely finished item shall be inspected for all provisions of this specification applicable to the end product examination and tests as required.

4.3 Inspection for acceptance.- Inspection for acceptance shall be in accordance with the provisions of MIL-STD-105, except where otherwise indicated.

4.3.1 Inspection of components.-

4.3.1.1 Testing of components.- In addition to quality assurance provisions of the subsidiary specifications and standards, inspection shall be performed on samples of identification marking for the characteristic indicated in table I. The inspection level shall be S-1 and the AQL shall be 6.5 defects per hundred units. Requirements shall be applicable to the individual unit.

TABLE I Component testing.-

Characteristic	Rqm't para	Test method	#determ per S/U	Results reported as
Fastness of marking	3.6	4.4	1	pass or fail

4.3.2 In-process inspection.- Inspection of the subassemblies shall be made at any point of the manufacturing process to determine whether operations or assemblies are accomplished as specified on the drawing. The Government reserves the right to exclude from consideration for acceptance any assembly in which in-process inspection has indicated nonconformance.

4.3.3 Inspection of the end item.-

4.3.3.1 Visual examination.- Defects found during the examination shall be classified in accordance with 4.3.3.1.1 and 4.3.3.1.2. Lots shall be in accordance with 4.3.3.1.3. The sample unit for these examinations shall be one completely fabricated panel marker.

4.3.3.1.1 Examination for defects in material, design, construction, and workmanship.-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Fabric	Any hole, cut, or tear.	x	-
	Any fabric defects:		
	-seriously affecting serviceability.	x	-
	-affecting serviceability, but not seriously. . . .	-	x
Hardware	Broken or malformed; finish omitted; corroded areas; burrs or sharp edges which may damage the item or cause injury in handling.	x	-
Grommets	Size, class, or type not as specified:		
	-seriously affecting serviceability.	x	-
	-affecting serviceability, but not seriously.	-	x
	Clinched excessively tight, cutting fabric, or insecurely clinched, i.e., grommet or washer becomes disengaged.	x	-
	End grommet set with rim of grommet extending beyond edge of hem.	x	-
Guy and corner lines	Eye or cut splice not as specified; free ends not finished as specified; less then specified length by more than 2 inches.	-	x
Seams and stitchings	Wrong seam or stitch type.	x	-
	Stitching margins or stitching gage not as specified, affecting serviceability.	-	x
	Stitch tension: loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in excessive tightness or puckering of fabric on seams.	-	x
	One or more required rows of stitching omitted. . . .	x	-
Open seam	On stitch type 301:		
	-more than 1/2 inch, but not more than 1 inch. . . .	-	x
	-more than 1 inch.	x	-
	On stitch type 401, any open seam except runoffs. .	x	-
	Runoffs on stitch type 401:		
	-more than 1/2 inch but not more than 1 inch.	-	x
	-more than 1 inch.	x	-
	NOTE: A seam shall be classified as open when one or more *stitches joining a seam are* broken or when two or more consecutive skipped stitches or runoffs occur. On double stitched seams, a seam shall be considered open when either one or both lines of stitching are open.		
Raw edges	When securely caught in stitching:		
	-more than 1 inch, but not more than 2 inches.	-	x
	-more than 2 inches.	x	-
	NOTE: Raw edges not securely caught in stitching shall be classified as an open seam.		
Runoffs (see open seams)			
Stitches per inch	One stitch less than minimum specified.	-	x
	Two or more stitches less than minimum.	x	-
	One stitch in excess of maximum specified.	-	x
	Two or more stitches in excess of maximum specified. .	x	-

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Thread breaks	Backstitched less than one inch on stitch type 301; overstitched less than 1-1/2 inches on stitch type 401.	-	x
	NOTE: Thread breaks not backstitched or not overstitched shall be classified as open seams.		
Stitching ends	Backstitched less than 1/2 inch (except where ends are held down by other stitching or turned under in a hem).	-	x
	Not backstitched.	x	-
Components and assembly	Chain portion of stitching shows on outside of the panel marker.	-	x
	Any component part or required operation omitted (unless otherwise classified herein).	x	-
	Needle chews expected to develop into a hole. . . .	x	-
	Seams badly pleated or puckered.	-	x
Repairs	Not as specified, or not authorized by the contracting officer.	x	-
Hems	Twisted or pleated.	-	x
	Less than specified width:		
	-by more than 1/4 inch, but not more than 1/2 inch. .	-	x
	-by more than 1/2 inch.	x	-
	Not constructed as specified in section "C-C" on dwg.	-	x
Reinforcements	Misplaced:		
	-seriously affecting serviceability.	x	-
	-affecting serviceability, but not seriously.	-	x
	Finished dimensions less than specified by more than 1/2 inch.	-	x
	Improperly applied, causing excessive fullness on reinforcements or reinforced parts.	-	x
	Not stitched to reinforced parts on all sides or not caught in seams or stitching of reinforced parts. . .	-	x
	Center piece set with center line off-center of marker by more than one inch.	x	-
	Reinforcement "A" set with center line off-center of center piece by more than 1/2 inch.	-	x
Red Cross panels	Vertical or horizontal center line of red cross off-center of marker halves:		
	-by more than 1/2 inch, but not more than one inch. .	-	x
	-by more than one inch.	x	-
	Any part of the marker, except red cross, not white.	x	-
Markings	Omitted, incorrect, illegible, or misplaced.	-	x
Cleanness	Noticeable grease or oil stains; thread ends not trimmed throughout.	-	x

4.3.3.1.2 Dimensional defects.- Any dimension that is not within the specified tolerance shall be classified a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

4.3.3.1.3 Inspection levels and acceptable quality levels (AQL's).- The inspection levels and the acceptable quality levels expressed in defects per hundred units shall be as follows:

	Inspection level	AQL Major	Total
For defects applicable to 4.3.3.1.1	II	15.0	40.0
For defects applicable to 4.3.3.1.2	S-4	(one class)	4.0

4.3.4 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking comply with the requirements of section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Shipping containers fully prepared for delivery shall be examined for the defects of closure listed below. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the acceptable quality level shall be 2.5.

Examine	Defect
Markings (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as, incomplete closure of container flaps, inadequate stapling.
Contents	Number per container is more or less than required.

4.4 Tests.- Testing shall be in accordance with FED-STD-191. Fastness shall be in accordance with method 5804.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.- Each marker shall be laid out flat, face up. All lines shall be neatly placed on top of the marker. The length shall be folded in half with the lines on the inside. The length shall then be folded in thirds with the resultant dimension approximately 36 inches. The width shall be folded in thirds with the completely folded marker measuring approximately 36 inches by 30 inches. Care shall be taken to expel the air during the folding operation to form a neat and compact bundle. The bundle shall be cross tied with cotton cord or twine.

5.1.2 Level C.- The panel marker shall be packaged to afford adequate protection against deterioration and damage during shipment from supply source to the first receiving station.

5.2 Packing.- Packing shall be level A, B, or C, as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

5.2.1 Level A.- Two panel markers packaged as specified in 5.1.1, shall be packed in a snug-fitting fiberboard shipping container conforming to class Weather-resistant, grade V2s of PPP-B-636. Closure and reinforcement shall be in accordance with the appendix of the container specification. The weight of each shipping container shall not exceed the size and weight limitations of the container specification.

5.2.2 Level B.- Two panel markers packaged as specified in 5.1.1, shall be packed in a snug-fitting fiberboard box conforming to class Domestic, grade 275 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The weight of the contents of each shipping container shall not exceed the size and weight limitations of the container specification..

5.2.3 Level C.- Panel markers packaged as specified in 5.1, shall be packed in such a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rates available for such supplies. Shipping containers shall be in accordance with the rules and regulations of the carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The red cross panel marker covered by this specification is intended to be used on tentage to designate that the tent is being used for medical purposes.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When standard samples will not be furnished (see 3.1).
(c) When a first article is required (see 3.2).
(d) The selection of applicable levels of packaging and packing (see 5.1 and 5.2).

Custodians:
Army - IH
Navy - SA
Air Force - 99
Review Activities:
Army - IH
Navy - SA
Air Force -
DSA - CT
User Activities:
Army - SM
Navy - MS

Preparing Activity:

The Institute of Heraldry,
United States Army

Project No. 8345-0082

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

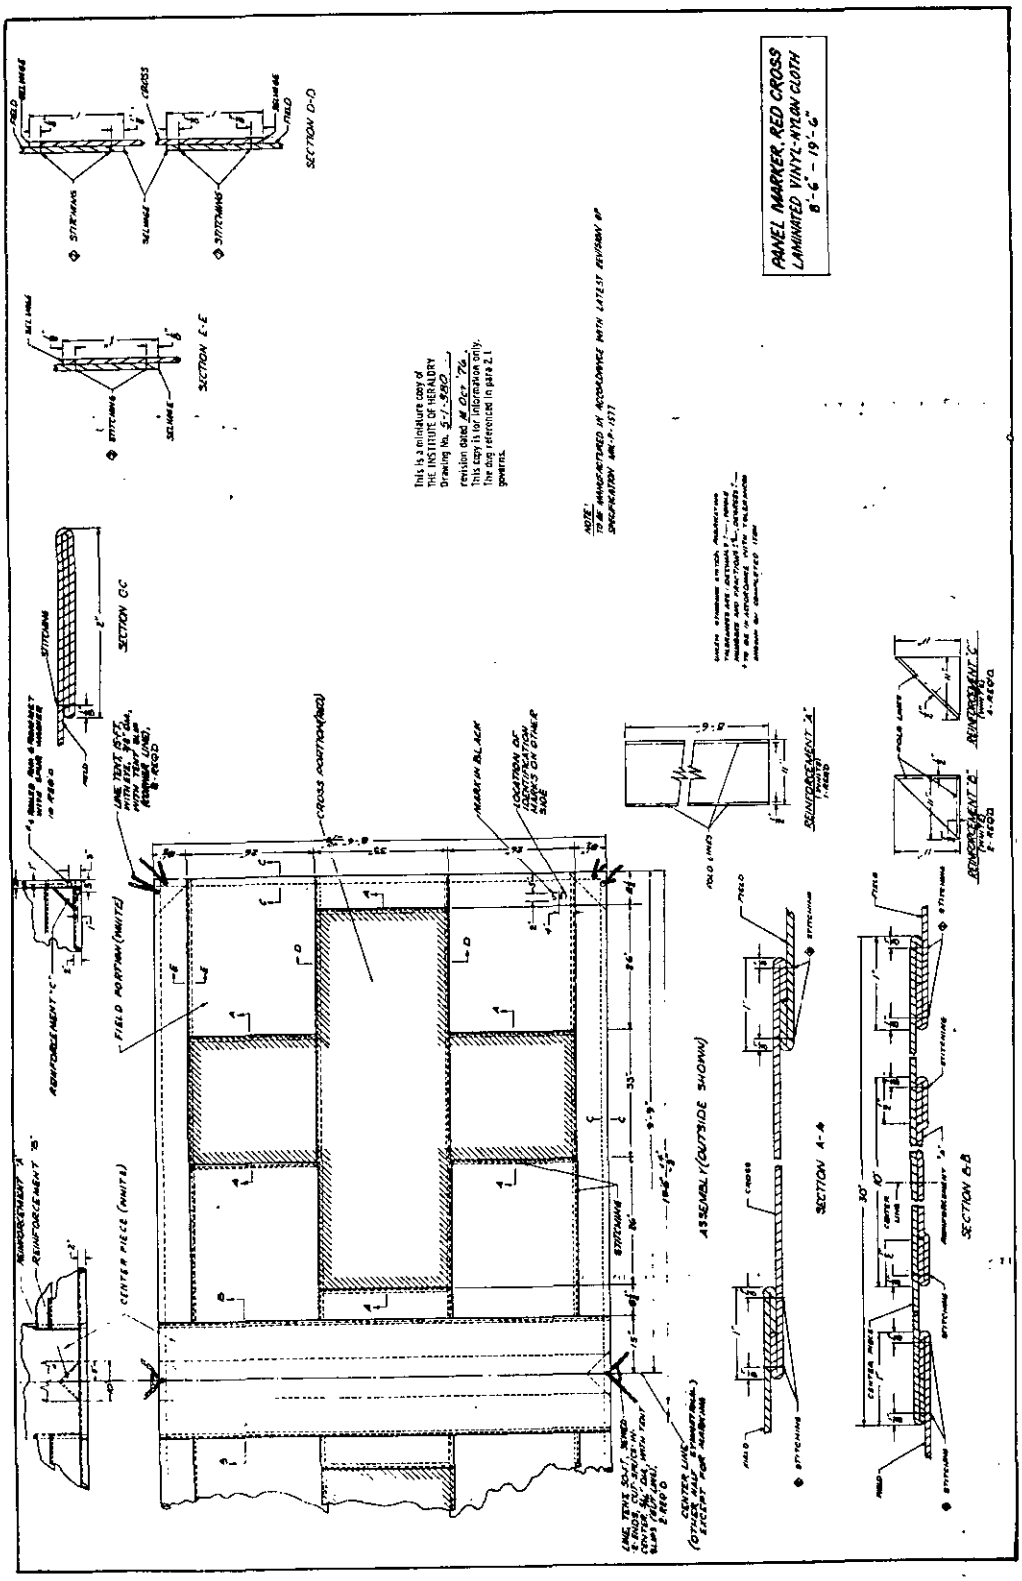


FIGURE 1

☆ U. S. GOVERNMENT PRINTING OFFICE: 1977-703-020/1726

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

THE INSTITUTE OF HERALDRY, US ARMY
Cameron Station, 5010 Duke Street
Alexandria, Virginia 22314

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-P-1577D Panel Marker, Red Cross, 8 Feet,6 Inches by 19 Feet, 6 Inches

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:32Z
Check the source to verify that this is the current version before use.