MIL-H-1679E

24 May 1974

SUPERSEDING
MIL-H-1679D
15 December 1970

MILITARY SPECIFICATION

HOOK, TENT; WITH THIMBLE, FOR GUY LINE, ASSEMBLY TENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one size of steel tent hook assembled to a steel or malleable iron rope thimble.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

FF-T-276	-	Thimbles, Rope.
QQ-I-666	-	Iron, Malleable, Ferritic, for Castings.
QQ-S-634	-	Steel, Bar, Carbon, Cold Finished, (Standard Quality).
QQ-Z-325	-	Zinc Coating, Electrodeposited Requirements for.
TT-E-485	-	Enamel, Semigloss, Rust-Inhibiting.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Boxes, Shipping, Fiberboard.
PPP-B-640	-	Boxes, Fiberboard, Corrugated, Triple-Wall.

MILITARY

MIL-T-1547	-	Thimbles, Rope (Solid).
MIL-L-10547	-	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.

FSC 8340

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:37Z
Check the source to verify that this is the current version before use.

DRAWING

ARMY NATICK LABORATORIES

4-1-72 - Hook and Thimble, Guy Line, Tent, Assembly.

(Miniature copy of Drawing 4-1-72, identified as figure 1, is attached for information purposes only.)

PUBLICATION

U.S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.)

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

American Society for Testing and Materials (ASTM)

A 153 - Zinc Coating (Hot Dip) on Iron and Steel Hardware

D 2092 - Preparation of Zinc-Coated Steel Surfaces For Painting.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:37Z
Check the source to verify that this is the current version before use.

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the hook to be procured under this specification for first article inspection and approval (see 4.3 and 6.3).

3.2 Materials. Materials shall conform to the applicable referenced specifications and requirements specified herein.

3.2.1 Steel bar, carbon. Carbon steel bar shall conform to C1015-1025, cold finished, standard quality, condition CF or CD of QQ-S-634.

* 3.2.2 Enamel. Enamel shall conform to type I or II, composition G or L, as applicable, olive drab color No. 24087 of TT-E-485.

3.3 Construction. The construction of the hook and assembly to thimble shall conform to Drawing 4-1-72 and as specified herein. The hook shall be assembled, at the option of the supplier, to either a steel thimble or malleable iron thimble. The hook and thimble shall be assembled after zinc coating and phosphate treatment but prior to application of enamel (see 3.4).

3.3.1 Hook. The hook shall be fabricated of steel specified in 3.2.1.

3.3.2 Thimble, steel. Steel thimble shall conform to type II, size 1/2-inch of FF-T-276, except that galvanizing requirements shall be waived.

* 3.3.3 Thimble, malleable iron. Malleable iron thimble shall conform to size 2-1/2 inches of MIL-T-1547, except that castings shall conform to grade I (ungalvanized) of QQ-I-666.

* 3.4 Finish. Prior to assembly, the hook and thimble shall be given a zinc coating with supplementary phosphate treatment conforming to either type III, class 1 of QQ-Z-325 or ASTM A 153 with preparation for painting in accordance with method A-crystalline zinc phosphate treatment of ASTM D 2092. After assembly, the hook with thimble shall be coated with enamel specified in 3.2.2.

* 3.5 Workmanship. Components shall be free of burrs, slivers, rough or sharp edges, and shall not be broken, cracked or malformed. Enamel shall level out to a uniform dry film thickness without runs, drops, streaks or areas of no film. The coating shall be free from imbedded foreign matter, gouge, scratch, scuff and shall show no evidence of peeling, flaking or blistering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:37Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required, the hook shall be examined in accordance with table I and 4.4.3.2. The presence of any visual or dimensional defect shall be cause for rejection of the first article.

* 4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.4.2 In-process examination.

* 4.4.2.1 Process examination. Examination shall be made during the manufacturing process for zinc coating and phosphate treatment specified in 3.3 and 3.4 to establish that no deviation is made from indicated requirements. Whenever nonconformance is noted, correction shall be made to affected items and process.

* 4.4.3 End item inspection. The inspection lot shall be all the assembled tent hooks with thimbles submitted for inspection at one time. The sample unit shall be one completely fabricated hook with thimble assembly.

* 4.4.3.1 Visual examination. Visual examination shall be made of the hook for defects listed in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:37Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not finished as specified.	X	
	Not color specified.		X
	Area of no film.	X	
	Not continuous, or is not smooth.		X
	Contains runs, drops or streaks.		X
	Foreign matter imbedded.		X
	Gouge, scratch or scuff:		
	(a) Exposing bare metal.	X	
	(b) Exposing phosphate treated zinc plate.		X
	Evidence of peeling, flaking or blistering.	X	
Construction and workmanship	Burrs, slivers, rough or sharp edges.	X	
	Hook or thimble broken, cracked or malformed.	X	
	Eye of hook not fully closed.	X	
	Evidence of red rust.	X	
	Incorrect type or size thimble.	X	
	Hook or thimble missing.	X	

* 4.4.3.2 Dimensional examination. Examination shall be made of the hook for defects in dimensions. Any dimension not within specified requirements shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0 expressed in terms of defects per hundred units.

* 4.4.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and markings are in compliance with section 5 of this specification. Defects shall be as specified in table II. The sample unit for this examination shall be one shipping container fully prepared for delivery. The lot shall be the number of shipping containers submitted for inspection at one time except that they need not be closed. The inspection level shall be S-2 and the AQL shall be 2.5 expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Markings (interior and exterior)	Missing, incorrect, incomplete, illegible, of improper size, location, sequence or method of application.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:37Z
Check the source to verify that this is the current version before use.

TABLE II. Examination of preparation for delivery (cont'd)

Examine	Defect
Materials	Any nonconforming component, component missing, damaged, or otherwise defective.
Workmanship	Bulged or distorted container.
Contents (interior and exterior)	Quantity of hooks with thimbles per package or shipping container, as applicable, is more or less than required.

* 4.4.4.1 Examination of shipping containers. When box or shipping containers are required to be in accordance with PPP-B-601, PPP-B-621, PPP-B-636, or PPP-B-640, as applicable, examination for defects in closure and strapping shall be in accordance with the appendix of the applicable specification.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A. Fifty hooks with thimbles, shall be packaged in a snug-fitting fiberboard box conforming to style RSC, either type CF, class domestic variety optional, grade 200, or type SF, class domestic, grade 200 of PPP-B-636. Each box shall be agitated during filling to assure a well-filled box. Closure shall be in accordance with the appendix of the box specification.

* 5.1.2 Level C (commercial package). Hooks with thimbles, shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and quantity per package shall be the same as that normally used by the supplier for retail distribution.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Three hundred hooks with thimbles, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to overseas type, style A, B, or I, grade B of PPP-B-601, or class 2, style 2 or 4 of PPP-B-621. Each shipping container shall be provided with a type I or II, grade C case liner conforming to MIL-L-10547. Each shipping container shall be closed and strapped in accordance with the appendix of the applicable container specification.

or

* 5.2.2 Level B. Three hundred hooks with thimbles, packaged as specified in 5.1, shall be packed in a snug-fitting shipping container conforming to either class 1, style E of PPP-B-640; domestic type, style A, B, or I, grade A or B of PPP-B-601; or class 1, style 2 or 4 of PPP-B-621.

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:37Z
Check the source to verify that this is the currentversion before use.

* 5.2.3 Level C (commercial pack). Hooks with thimbles, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with U.S. Postal Service, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The tent hooks with thimbles covered by this specification are intended for use with guy lines in the erection of assembly tents.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article is required (see 3.1. 4.3 and 6.3).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

* 6.4 Revision changes. The margins of this specification are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 82

User activity:

Navy - YD

Preparing activity:

Army - GL

Project No. 8340-0308

Source: https://assist.dla.mil -- Downloaded: 202640-16T13:37Z
Check the source to verify that this is the current version before use.

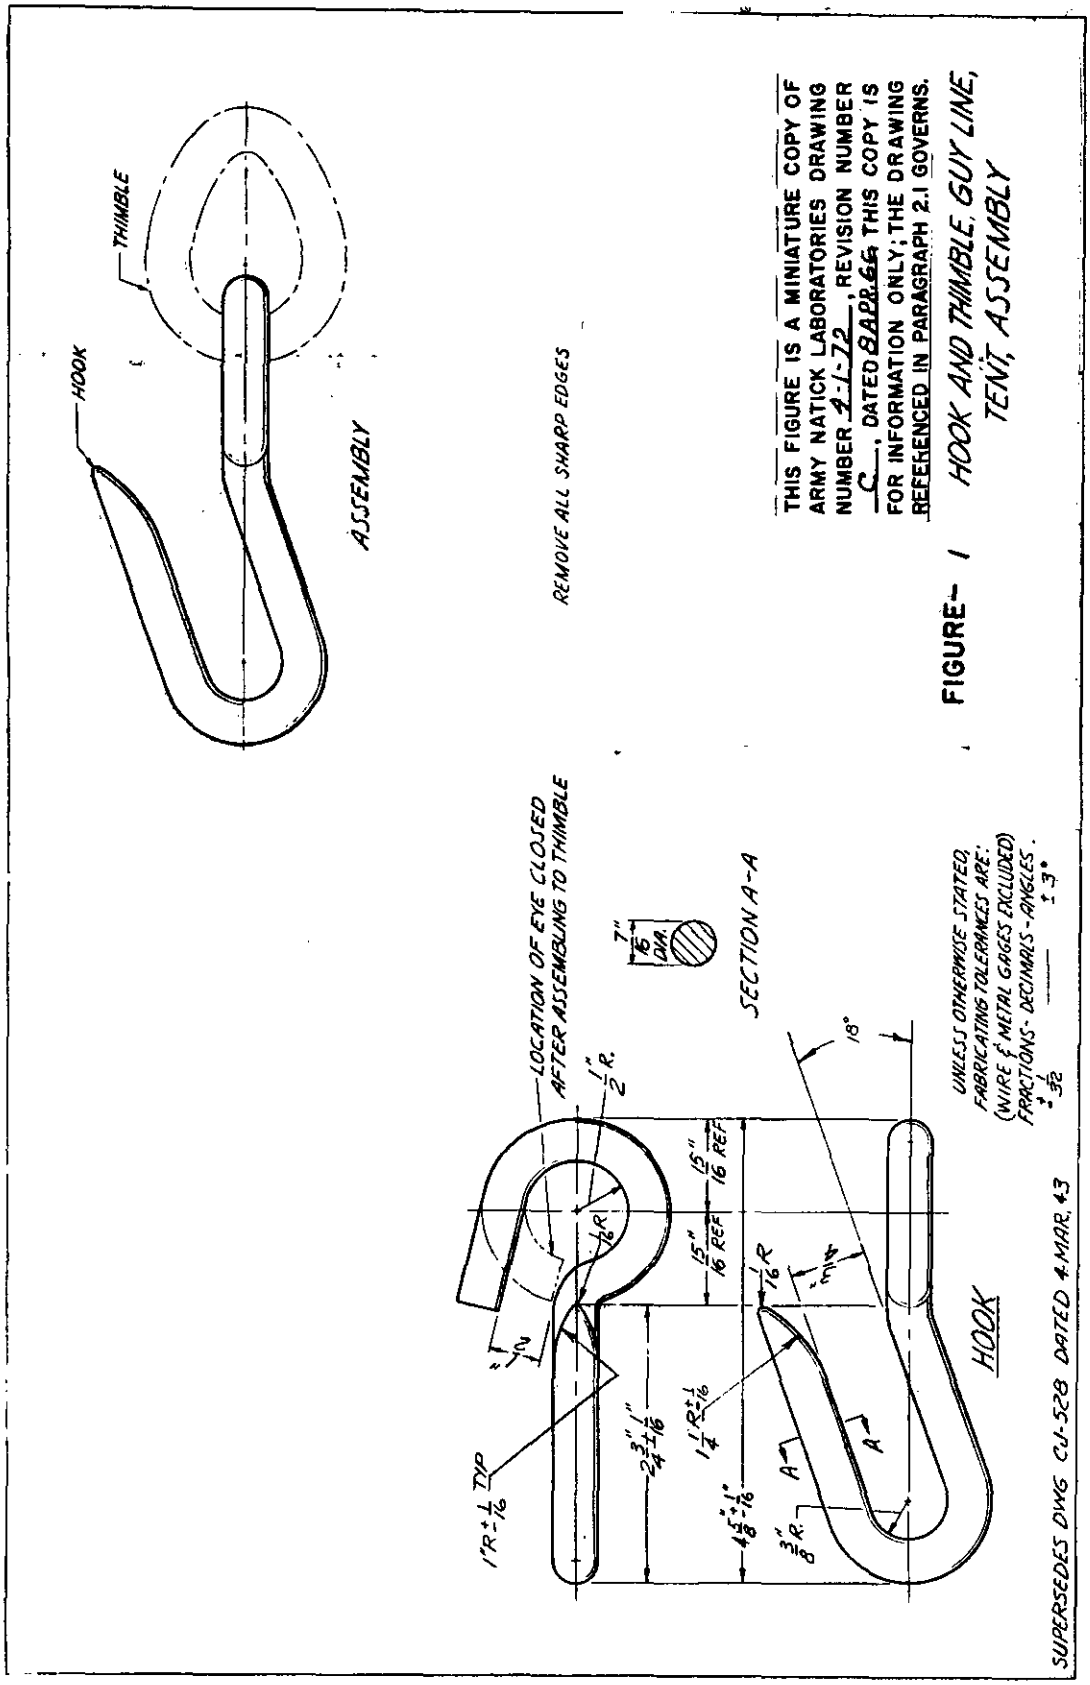


FIGURE- 1 HOOK AND THIMBLE, GUY LINE, TENT, ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:37Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-H-1679E HOOK, TENT; WITH THIMBLE, FOR GUY LINE, ASSEMBLY TENT

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:37Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STSNLT-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



Commander
US Army Natick Laboratories
ATTN: STSNLT-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:37Z
Check the source to verify that this is the current version before use.