MIL-L-1709D

28 April 1975
SUPERSEDING
MIL-L-1709C
18 February 1966

MILITARY SPECIFICATION

LINES, TENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the requirements for tent lines used in tentage and other items such as tarpaulins and covers.

1.2 Classification. Tent lines shall be of the types and classes as indicated in table I (see 6.2).

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

T-C-571	-	Cords, Cotton, General and Special Purpose, Sash and Venetian Blind
T-T-871	-	Twine, Cotton, Wrapping
T-T-881	-	Twine, Cotton, Seine
V-T-285	-	Thread, Polyester
UU-P-268	-	Paper, Kraft, Wrapping
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

FSC 8340

2139

S/S unless

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-R-1670	-	Rope, Tent-lay
MIL-H-1679	-	Hook, Tent; with Thimble, for Guy Line, Assembly Tent
MIL-R-30500	-	Rope, Polyester

STANDARDS

FEDERAL

FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.2 Materials and components.

3.2.1 Rope, manila. The manila rope shall conform to type I, class 2 of MIL-R-1670 (see 6.5).

3.2.2 Rope, sisal. The sisal rope shall conform to type II, class 2 of MIL-R-1670 (see 6.5).

3.2.3 Rope, twisted, cotton. The cotton twisted rope shall conform to type IV, class 2 of MIL-R-1670 (see 6.5).

3.2.4 Cord, cotton, braided. The braided cotton cord shall conform to type I, class 3 of T-C-571 (see 6.5).

3.2.5 Rope, jute. The jute rope shall conform to type III, class 2 of MIL-R-1670.

3.2.6 Twine, cotton. The cotton twine shall conform to type II, commercial number 96 of T-T-881.

* 3.2.7 Rope, polyester. The polyester rope shall be a continuous filament polyester fiber, conforming to MIL-R-30500 in sizes specified. The ends of the rope shall be cut off squarely and shall be securely whipped, taped, or heat sealed to prevent untwisting or fraying.

* 3.2.8 Thread, polyester. The thread shall be natural, conforming to type I, class 1, sub-class A, size E or FF of V-T-285.

3.2.9 Twine, cotton, wrapping. The 5 ply wrapping twine shall conform to type II, class 1 of T-T-871.

* 3.2.10 Hook, tent, with thimble. The tent hook, with thimble, used in the type XXXIX tent line shall conform to MIL-H-1679. As an alternate, a commercial type of hook and thimble of comparable size may be furnished upon approval of the contracting officer.

3.3 Physical requirements. The finished tent lines shall conform to the requirements specified in table I and as specified herein.

3.3.1 Classes. The materials for the classes of tent lines shall be as specified in 3.2.1 through 3.2.7. The classes of tent lines shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

Class A - Rope, Manila
Class B - Rope, Sisal
Class C - Rope, Cotton, Twisted
Class D - Cord, Cotton, Braided
Class E - Rope, Jute
Class F - Twine, Cotton Seine
Class G - Rope, Polyester

* 3.3.2 Finishes. The end finishes, eye finishes, footstops and splices as referenced by figure number shall be in accordance with figures 1 through 17 and as specified herein.

Source: https://assist.dla.mil -- Downloaded: 20261O-16T13:39Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements

Type	Nomenclature	Rope size (in.)		Class of rope		Cut length				Finish of lines		Finished length	
						Class A, B,C,E or G lines		Class D & F lines		Class A, B, C,E or G lines	Class D & F lines		
		Cir.	Dia.	Std.	Substitute (see 6.3)	Ft.	In.	Ft.	In.	Fig. No.	Fig. No.	Ft.	In.
I	Line, tent, footstop 7 in.	3/4	1/4	A	D		19		19	13	13		7
II	Line, tent, footstop, 10 in.	5/8	3/16	C			14			14			10
III	Line, tent, 2 ft.	3/4	1/4	A	B,C,D,E, or G	2		2	6	5	5	(note A)	
V	Line, tent, 3 ft. 4 in.	3/4	1/4	C		3	4			3		3	4
VI	Line Tent, 3 ft. 4 in.	3/4	1/4	A	B,C,D,E, or G	3	4	3	10	5	5	(note A)	
VIII	Line, tent, 4 ft. 6 in.	3/4	1/4	A	B,C,D,E, or G	4	6	4	6	5	5	4	6
IX	Line, tent, 4 ft. 7 in.	1-1/2	3/8	A	B,C,D,E, or G	4	7	5	1	6	6	(note A)	
X	Line, Tent, 6 ft.	3/4	1/4	A	B,C,D,E, or G	6		6	6	5	5	(note A)	
XI	Line, tent, 6 ft.	1-1/2	1/2	A	B,E or G	6				6		6	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements

Type	Nomenclature	Rope size (in.)		Class of rope		Cut length				Finish of lines		Finished length	
						Class A, B,C,E or G lines		Class D & F lines		Class A, B, C,E or G	Class D & F lines		
		Cir.	Dia.	Std.	Substitute (see 6.3)	Ft.	In.	Ft.	In.	Fig. No.	Fig. No.	Ft.	In.
XIII	Line, tent, 7 ft. 1 in.	5/8	3/16	C		7	6			12		7	1
XIV	Line, tent, 8 ft	3/4	1/4	A	B,C,D,E, or G	8		8		5	5	8	
XV	Line, tent, 8 ft.	3/4	1/4	A	B,C,D,E, or G	8	8	9		1	13	8	
XVI	Line, tent, 9 ft. 2 in.		1/8	D				9	2		Unfin.	9	2
XVII	Line, Tent, 10 ft. 6 in.	3/4	1/4	A	B,C,D,E, or G	10	6	11		5	5	(note A)	
XVIII	Line, Tent, 11 ft.	1	5/16	A	B,C,D,E, or G	11		11		5	5	11	
XIX	Line, tent, 11 ft. 6 in.	1	5/16	A	B,C,D,E, or G	12	3	12	11	1	13	11	
XX	Line, tent, 12 ft.	1-1/2	1/2	A	B,E or G	12				4		12	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements

Type	Nomenclature	Rope size (in.)		Class of rope		Cut length				Finish of lines		Finished length	
						Class A, B,C,E or G lines		Class D & F lines		Class A, B, C,E or G	Class D & F lines	lines	
		Cir.	Dia.	Std.	Substitute (see 6.3)	Ft.	In.	Ft.	In.	Fig. No.	Fig. No.	Ft.	In.
XXI	Line, tent, 13 ft.	1	5/16	A	B,C,D,E, or G	13	9	14	5	1	1	13	
XXIII	Line, tent, 14 ft.	3/4	1/4	A	B,C,D,E, or G	14		14	6	5	5	(note A)	
XXIV	Line, tent, 15 ft.	1-1/8	3/8	A	B,C,D,E, or G	15	10	16	7	2	12	15	
XXVI	Line, tent, 18 ft. 6 in.	1-1/2	1/2	A	B,E or G	18	6			6		18	6
XXVIII	Line, tent, 19 ft.	1	5/16	A	B,C,D,E, or G	19	9	20	5	1	12	19	
XXXI	Line, tent, 27 ft.	3/4	1/4	A	B,C,D,E, or G	27		27	6	5	5	(note A)	
XXXV	Line, tent, 36 ft.	1	5/16	A	B,C,D,E, or G	36		36		5	5	36	
XXXVIII	Line, tent,50 ft.	1	5/16	A	B,C,D,E, or G	25	5	26	1	7	11	50	
XXXIX	Line, tent, 52 ft. w/thimble and hook	1-1/2	1/2	A	B,E or G	52	6			(note B)		52	
XL	Line, tent, 64 ft.	1	5/16	A	B,C,D,E, or G	32	5	33	1	7	11	64	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements (cont'd)

Type	Nomenclature	Rope size (in.)		Class of rope		Cut length				Finish of lines		Finished length	
						Class A, B,C,E or G lines		Class D & F lines		Class A, B, C,E or G	Class D & F lines		
		Cir.	Dia.	Std.	Substitute (see 6.3)	Ft.	In.	Ft.	In.	Fig. No.	Fig. No.	Ft.	In.
XLIII	Line, tent, 13 ft. 6 in.	1-1/8	3/8	A	B,E, or G	13	6			4		13	6
XLVI	Line, tent, 6 ft. 8 in.	1-1/2	1/2	A	B,E or G	7	6			2		6	8
XLVII	Line, tent, 48 in.	1-1/8	3/8	A	B,E or G		54			14			48
XLVIII	Line, tent, 72 in.	1-1/8	3/8	A	B,E or G		72			4			72
XLIX	Line, tent, 48 in.	1-1/8	3/8	A	B,E or G		48			4			48
L	Line, tent, 25 ft.	3/4	1/4	A	B,E or G	25	6			15		25	
LI	Line, tent, 25 ft.	3/4	1/4	A	B,E or G	26				17		25	
LII	Line, tent 12 ft. 6 in.		7/32	D				12	6	Unfin. both ends		12	6
LIII	Line, tent, 15 ft.		7/32	D				15		Unfin. both ends		15	
LIV	Line, tent, 21 ft. 6 in.		7/32	D				21	6	Unfin. both ends		21	6
LVI	Line, tent, 19 ft.		1/8	D				19		Infin, both ends		19	
LVII	Line, tent, 30 ft.		1/8	D				30		Unfin. both ends		30	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

TABLE I. Physical requirements

Type	Nomenclature	Rope size (in.)		Class of rope		Cut length				Finish of lines		Finished length	
						Class A, B, C, E or G lines		Class D & F lines		Class A, B, C, E or G	Class D & F lines		
		Cir.	Dia.	Std.	Substitute (see 6.3)	Ft.	In.	Ft.	In.	Fig. No.	Fig. No.	Ft.	In.
LVIII	Line, tent, 35 ft.		1/8	D				35		Unfin. both ends		35	
LIX	Line, tent, 15 ft.		No. 96	F				15		Unfin, both ends		15	
LX	Line, tent, 6 ft.		No. 96	F				6		Unfin. both ends		6	
LXIII	Line, tent, 23 ft. 3 in.	1-1/2	1/2	A						9 (note C)		23	3

Note A Length of line shall be same as cut length for applicable class of rope.

Note B Finish same as figure 2, except to be spliced around thimble with guy hook attached.

Note C Type LXIII is made of 2 pieces of rope, one 24 feet long and one 24 inches long.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

3.3.3 Color. The color of the rope shall be as specified in the applicable subsidiary rope specifications unless otherwise specified in the applicable end use specification or contract (see 6.2).

3.4 Construction.

3.4.1 Stitching, machine. All machine stitching shall conform to FED-STD-751 for stitch type indicated.

* 3.4.1.1 Machine serving. Machine serving shall be as specified on the applicable referenced figure. A pure silicone fluid, type DC 200 or equal may be used in machine serving to lubricate the thread if required in the manufacturing process. Machine serving the ends shall be accomplished by using stitch type 304 or 308, 12 to 16 stitches per inch. The stitching shall extend at least 1-1/2 inches from the free end of the rope.

3.4.1.2 Footstops. The machine stitched footstops (type II) shall be stitched the entire length with stitch type 301, 5 to 7 stitches per inch and shall then be knotted mechanically as shown on figure 14.

3.4.1.3 Sewn eye. The sewn eye as shown on figure 12 shall be finished with stitch type 304, 12 to 16 stitches per inch. A minimum of 3 inches of overcast stitching shall be used to join the lengths of rope together. The stitch shall be run off the joined strands onto the longer single strand a minimum of 1/2 inch.

3.4.1.4 Thread breaks. Thread breaks in stitching shall be overstitched not less than one inch at each break on stitch type 301 and not less than 3/4 inch on type 304 stitching.

3.4.2 Hand serving. Hand serving as specified on referenced figures shall be securely and neatly accomplished with double strands of twine specified in 3.2.9. Waxed twine will be allowed.

3.4.3 Splicing. Unless otherwise specified, all splices with the exception of the sailmaker's splice (figure 8) shall have three tucks. The sailmaker's splice shall consist of 4 tucks; the first two tucks with 3 strands of rope, the third tuck with two strands and the fourth tuck with one strand, yielding a tapered effect. Unless otherwise specified, the ends of all strands shall be clipped after the splice is completed to a length of not less than one inch nor more than 1-1/4 inches.

3.4.4 Eye size. The size of the eyes shall be as specified on applicable referenced figure and shall be the measurement of the inside loop when stretched taut.

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:39Z
Check the source to verify that this is the currentversion before use.

3.4.5 Dimensions. Any dimension for lengths of lines specified in table I and any dimension specified in the referenced figures are minimum.

3.4.6 Knots. Knots shall be tied as specified in the applicable figure. All knots shall be pulled tight mechanically so that they cannot be readily untied by hand.

3.5 Workmanship. The tent lines shall contain no kinks, broken or loose ends, bulged strands, strand marks or loosely twisted strands. The lines shall be clean and free of grease or oil stains and shall have no objectionable odor. There shall be no cut, chafe, fray or abrasion marks. Braided cord shall be evenly braided so as to contain no open places or breaks in continuity of braid or soft spots. The finish of the cord shall not be gummy or tacky nor cause the cord to check or crack.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required, it shall be examined for the defects listed in table II and dimensions specified. The presence of any defect or any dimension not within the specified requirements shall be cause for rejection of the first article.

* 4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

4.4.2 End item inspection. The lot shall consist of all completely fabricated tent lines offered for inspection at one time. The sample unit shall be one completely fabricated tent line.

* 4.4.2.1 Visual examination. Examination shall be made of the completely fabricated tent lines for the defects in table II. The inspection level shall be level I with an acceptable quality level (AQL) of 4.0 defects, expressed in terms of defects per hundred units.

TABLE II. Classification of defects for visual characteristics

Examine	Defect
Appearance and workmanship (general)	Kinks; broken or loose ends; bulged strands; strand knots
	Strands loosely twisted
	Grease; oil stains; general uncleanliness throughout line, clearly noticeable
	Objectionable odor
	Cut, chafe, fray, rub or abrasion mark
	Braided cord unevenly braided resulting in open places or breaks in continuity of braid or soft spots
	Finish of cord gummy or tacky; finish causes cord to check or crack
	Ends of synthetic fiber tent lines not securely whipped, taped of heat sealed
	Not constructed as specified
	Uneven or spotty dyeing
	Color not as specified
Splicing (when applicable)	Number of tucks less than specified
	Tucking not accomplished as specified
	Clipped end of splice strand extends less than 1 inch or more than 1-1/4 inches from splice
	Not accomplished as specified; loose
	Insufficient tension around thimble (when applicable), viz., rope slips off thimble
Knotting (when applicable)	Not as specified
	Can be readily untied by hand
	Omitted
Hand serving (when applicable)	Not accomplished with double strand of twine
	Accomplished with less than 7 complete turns
	Any operation omitted
	First turn less than 1/2 inch from end of line or more than 3/4 inch from end of line

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects for visual characteristics (cont'd)

Examine	Defect
Machine serving (when applicable)	Accomplished with other than 304 or 308 stitch type Extends less than 1-1/2 inches from free end of rope
Sewn eye	Accomplished with other than 304 stitch type Joined lengths of rope stitched with less than 3 inches of overcast stitching Stitching run off onto the longer strand less than 1/2 inch
Stitching (general)	Loose stitching Not overstitched at each break Overstitched less than one inch at each break on stitch type 301 Overstitched less than 3/4 inch at each break on stitch type 304 or 308 Stitches per inch less than 5 stitches or more than 7 stitches on type 301 stitching; less than 12 inches or more than 16 stitches per inch on type 304 or 308 stitching

4.4.2.2 Dimensional examination. Unless otherwise specified, any dimension less than the minimum shall be classified as a defect. The inspection level shall be S-2 and the AQL shall be 4.0, expressed in terms of defects per hundred units.

* 4.4.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking are in compliance with the requirements of section 5. Defects shall be scored in accordance with table III. The sample unit shall be one shipping container fully prepared for delivery. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot shall be the number of shipping containers offered for inspection at one time. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

TABLE III. Examination of preparation for delivery

Examine	Defect
Marking	Omitted: incorrect; illegible; of improper size, location, sequence or method of application

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:39Z
Check the source to verify that this is the currentversion before use.

TABLE III. Examination of preparation for delivery (cont'd)

Examine	Defect
Materials	Any component missing or damaged
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, bulged or distorted container
Content	Number per container is more or less than required or (when applicable) number of bundles per container is more or less than required

Note: Not less than two bundles from each container shall be examined to check number per bundle.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Tent lines, of one type and class only, shall be neatly put up in bundles as specified in table IV. Each bundle shall be secured at several points along the length with cotton cord or twine. Lines, put up one to a bundle, shall be wound in a hank or tied with one end of the line or secured with cotton cord or twine.

5.1.2 Level C. Tent lines shall be packaged to afford adequate protection against deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

TABLE IV.

TYPE	NUMBER OF LINES PER BUNDLE	NUMBER OF LINES PER CONTAINER
I	LOOSE	1200
II	LOOSE	4000
III	50	800
V	50	600
VI	50	500
VIII	50	400
IX	25	175
X	25	300

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:39Z
Check the source to verify that this is the currentversion before use.

TABLE IV. (cont'd)

TYPE	NUMBER OF LINES PER BUNDLE	NUMBER OF LINES PER CONTAINER
XI	10	100
XIII	50	450
XIV	25	250
XV	25	200
XVI	25	800
XVII	25	175
XVIII	10	90
XIX	10	90
XX	10	50
XXI	10	80
XXIII	10	140
XXIV	5	50
XXVI	5	30
XXVIII	5	60
XXXI	1	70
XXXV	1	35
XXXVIII	1	20
XXXIX	1	8
XL	1	15
XLIII	5	125
XLVI	5	110
XLVII	25	325
XLVIII	25	200
XLIX	25	325
L	1	125
LI	1	125
LII	10	200
LIII	10	170
LIV	1	125
LVI	25	500
LVII	25	250
LVIII	25	200
LIX	50	1000
LX	50	1200
LXIII	1	40

5.2 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Tent lines of one type and class only, packaged as specified in 5.1, shall be packed in the quantities specified in table IV

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:39Z
Check the source to verify that this is the currentversion before use.

in a snug-fitting fiberboard shipping container conforming to style RSC-L, V2s of PPP-B-636. The inside of each shipping container shall be fitted with a taped liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-F-320. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each shipping container shall be closed, waterproofed by means of tape, and reinforced with flat strapping or tape banding in accordance with PPP-B-636.

* 5.2.2 Level B. Tent lines of one type and class only, packaged as specified in 5.1, shall be packed in the quantities specified in table IV in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF, variety SW or type SF, class domestic grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a liner conforming to type CF, class domestic, variety DW of PPP-B-636. Each container shall have the contents completely covered on the top and bottom with kraft paper as specified in 5.2.1. Each container shall be closed in accordance with method II of the appendix of PPP-B-636.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be V3c, V3s, or V4s, fabricated and closed in accordance with PPP-B-636.

* 5.2.3 Level C. Tent lines packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, each bundle and shipping container shall be marked in accordance with MIL-STD-129.

6. NOTES

* 6.1 Intended use. The tent lines are intended for use on various types of tents, shelters and tarpaulins.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Type and class required (see 1.2).
(c) Color, if required (see 3.3.3).
(d) When a first article is required (see 3.1, 4.3 and 6.4).
(e) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(f) Whether V-board shipping containers are required for level B shipments (see 5.2.2.1).

93

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:39Z
Check the source to verify that this is the current version before use.

6.3 For procurement purposes, the substitute class shall not be furnished unless specifically authorized in the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of Armed Services Procurement Regulations ASPR 7-104.55. The first article should be a preproduction sample, initial production item, or other specific items described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.5 When the use of cotton, manila or sisal rope is restricted due to unavailability of these fibers, solid braid general purpose nylon cord, MIL-C-43307 or solid braid polyester cord, MIL-C-43256 may be substituted for the braided cotton cord. Nylon rope, MIL-R-17343, may be substituted for the manila, sisal or twisted cotton rope where applicable. The approval of these alternates is the responsibility of the US Army Natick Development Center, Natick, MA 01760 in conjunction with the contracting officer or the procuring activity.

6.6 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 82

User activities:

Navy - MC, YD, CG

Review activity:

DSA-CT

Preparing activity:

Army - GL

Project No. 8340-0276

Source: https://assist.dla.mil -- Downloaded: 2026-01-16T13:39Z
Check the source to verify that this is the current version before use.

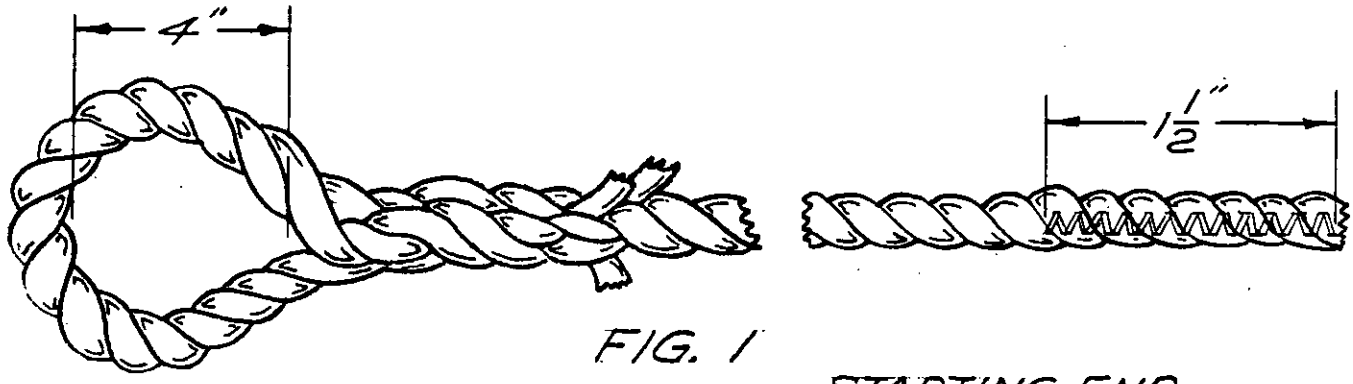


FIG. 1

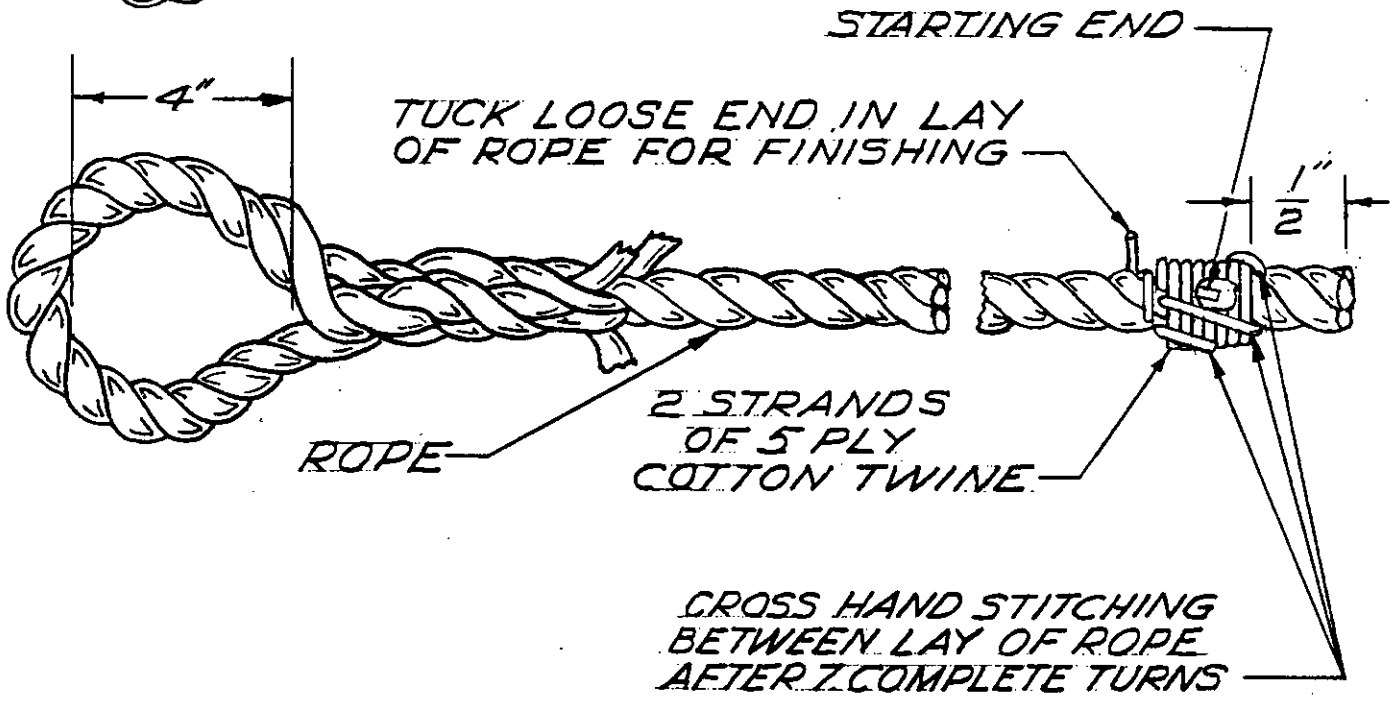


FIG. 2



FIG. 3

5-4-566 A

Source: https://assist.dla.mil -- Downloaded: 20261046T13:39Z
Check the source to verify that this is the current version before use.

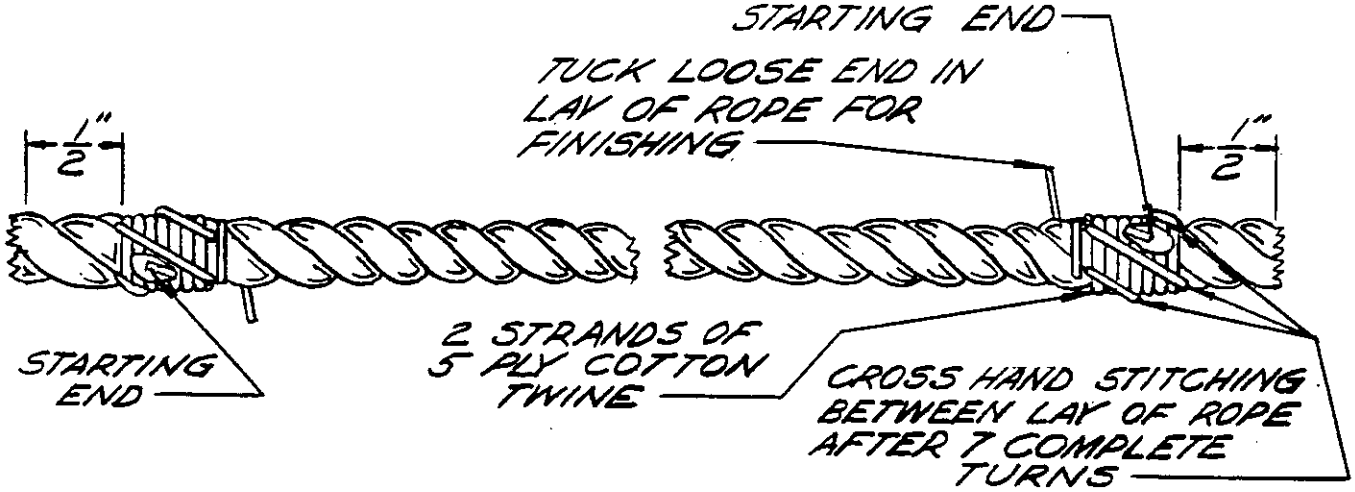


FIG. 4



FIG. 5

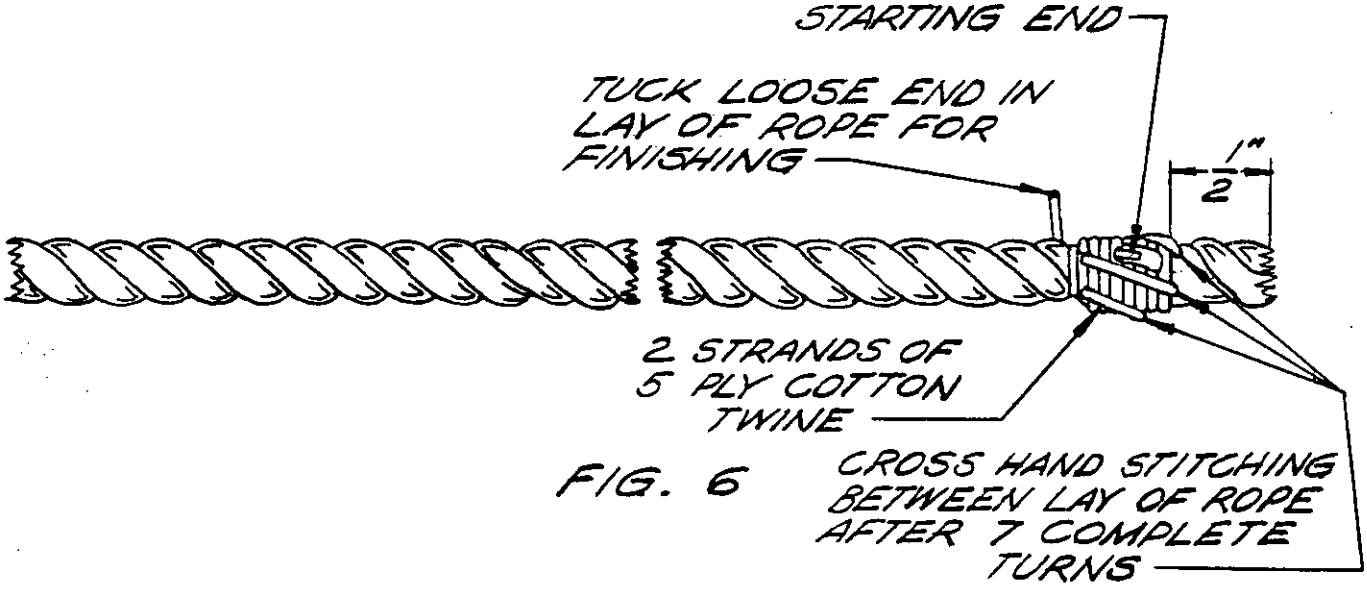
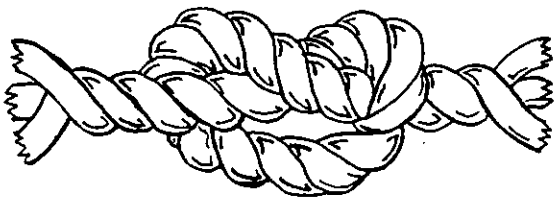
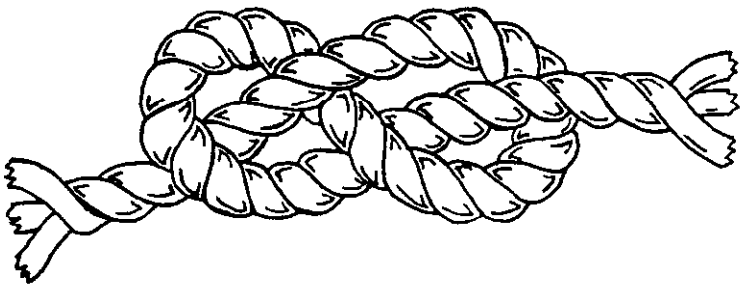


FIG. 6

5-4-567A

Source: https://assist.dla.mil -- Downloaded: 2026-02-16T13:39Z
Check the source to verify that this is the current version before use.





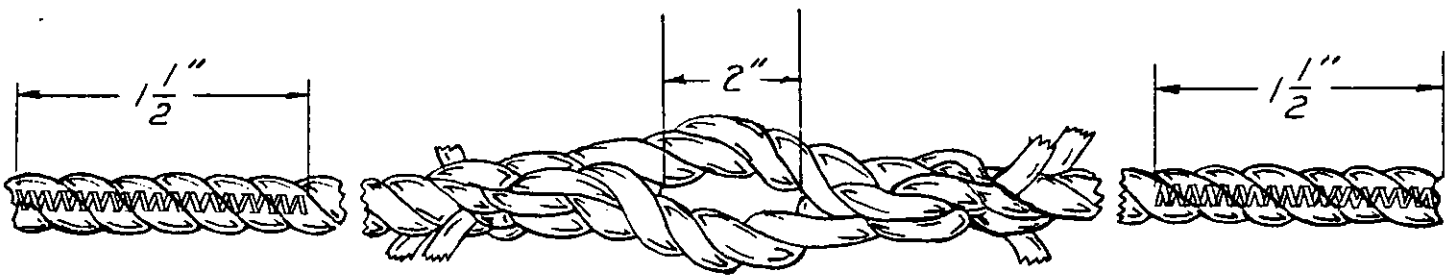


FIG. 7

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:39Z
Check the source to verify that this is the current version before use.

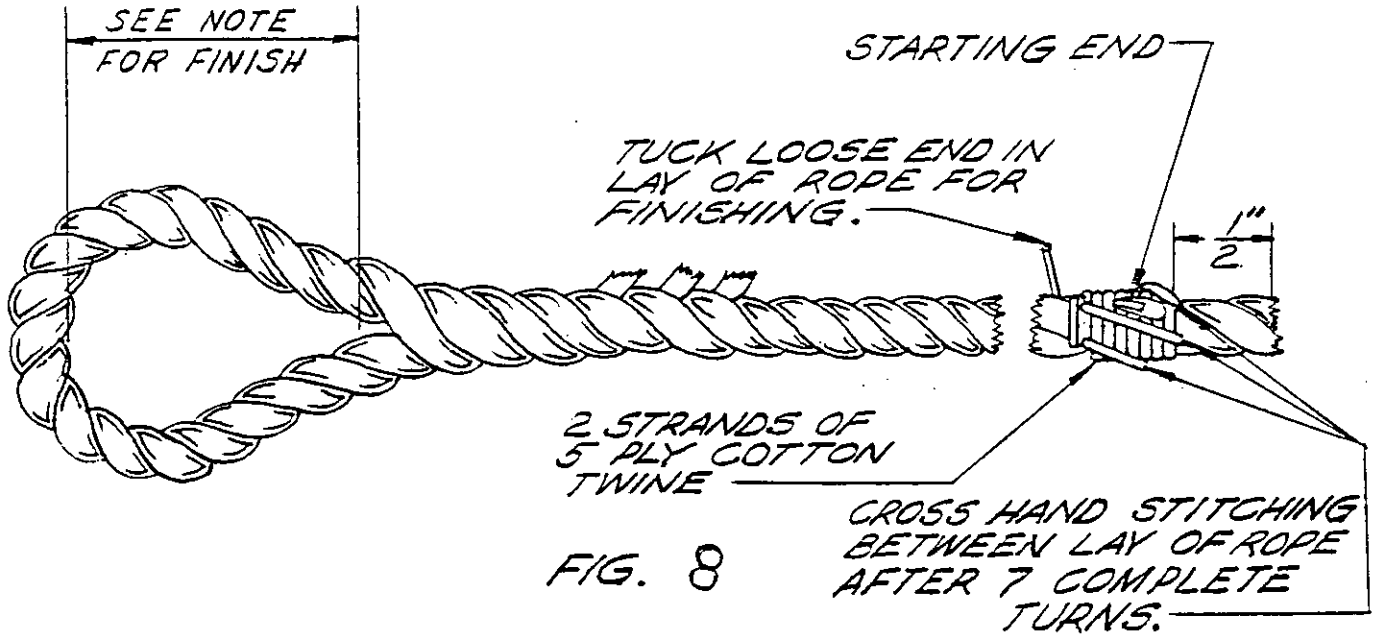


FIG. 8

NOTE TO BE FINISHED AROUND THIMBLE WITH SUFFICIENT TENSION SO THAT ROPE WILL NOT SLIP OFF THIMBLE

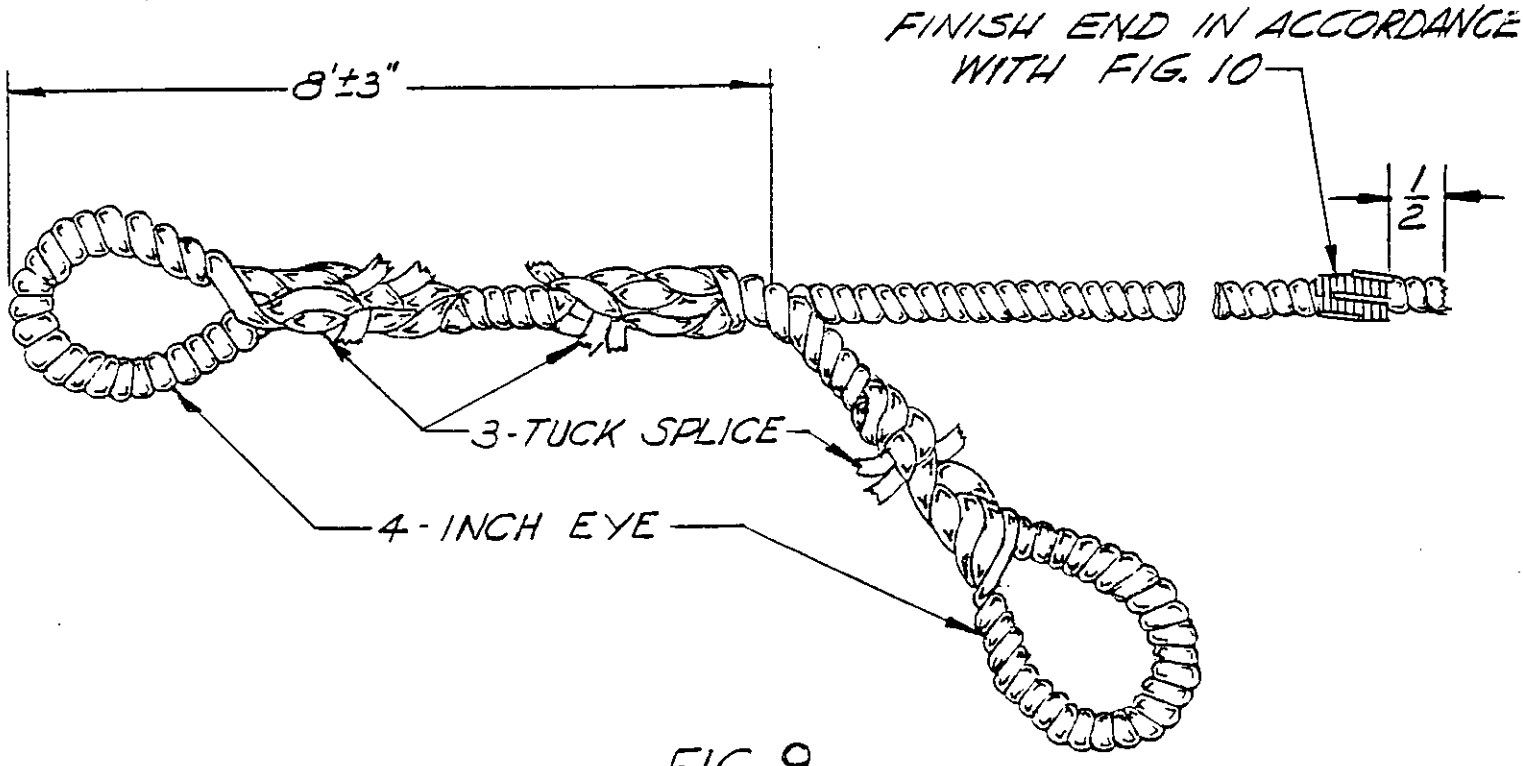


FIG. 9

5-4-569

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:39Z
Check the source to verify that this is the current version before use.

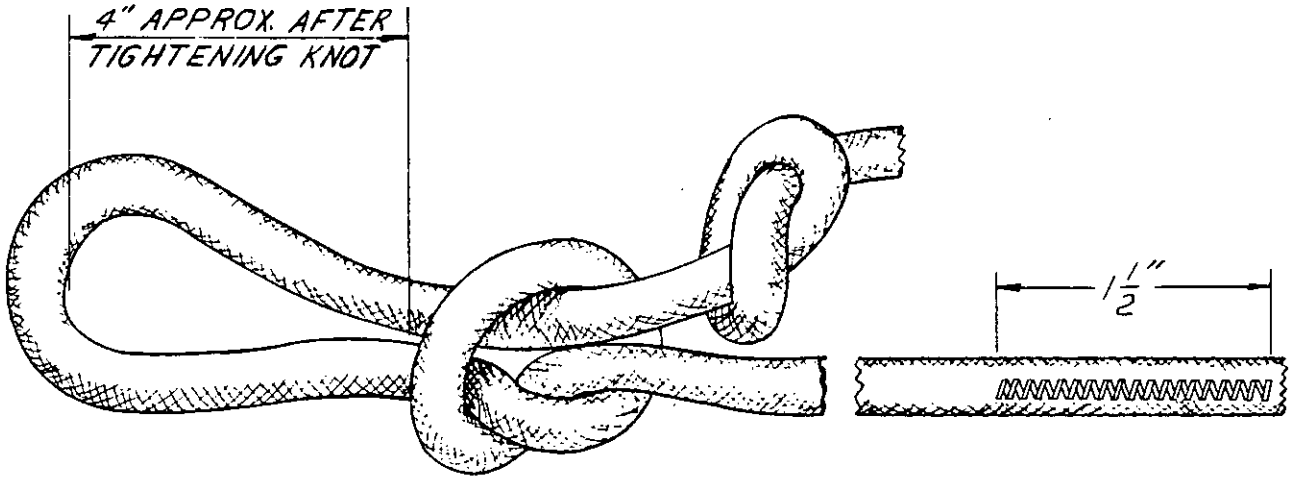


FIG. 10

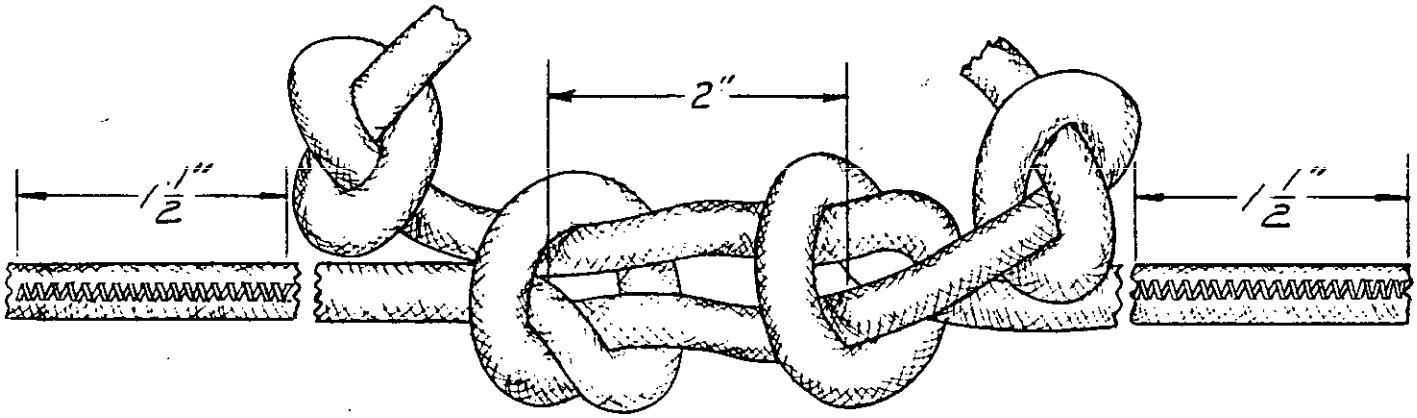


FIG. 11

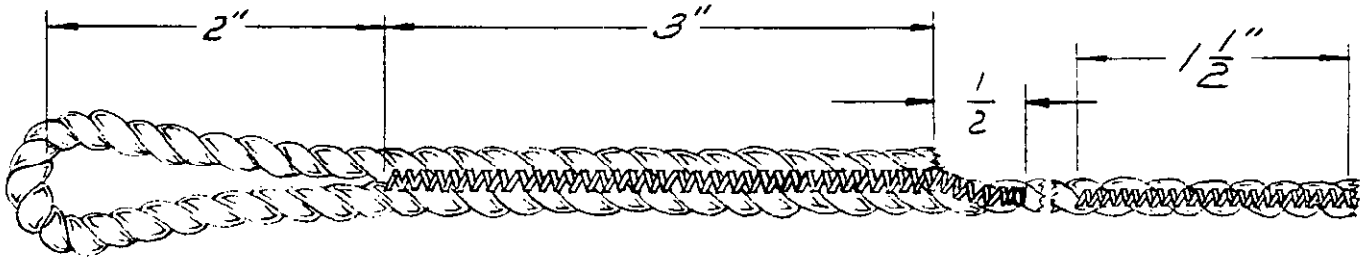


FIG. 12

Source: https://assist.dla.mil -- Downloaded: 2026-02-16T13:39Z
Check the source to verify that this is the current version before use.

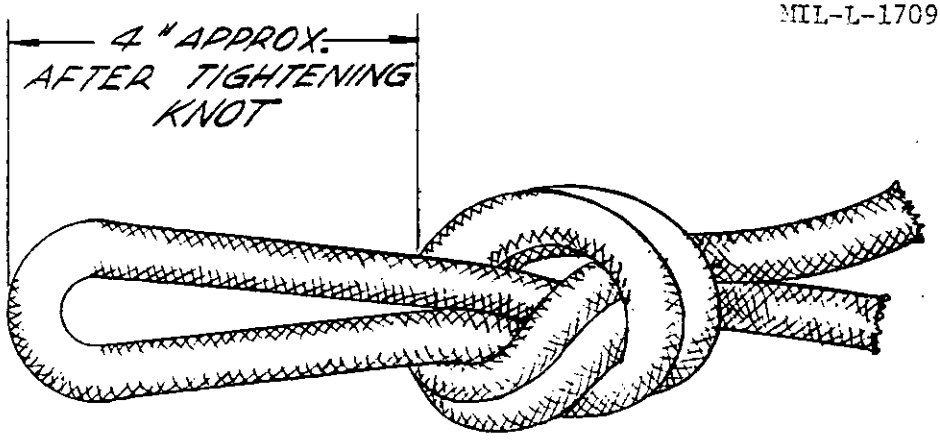


FIG. 13

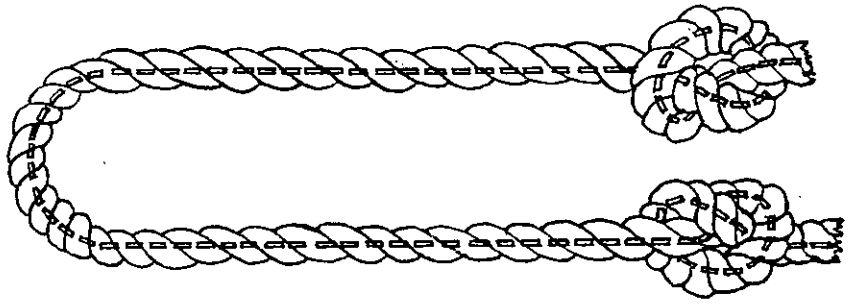


FIG. 14

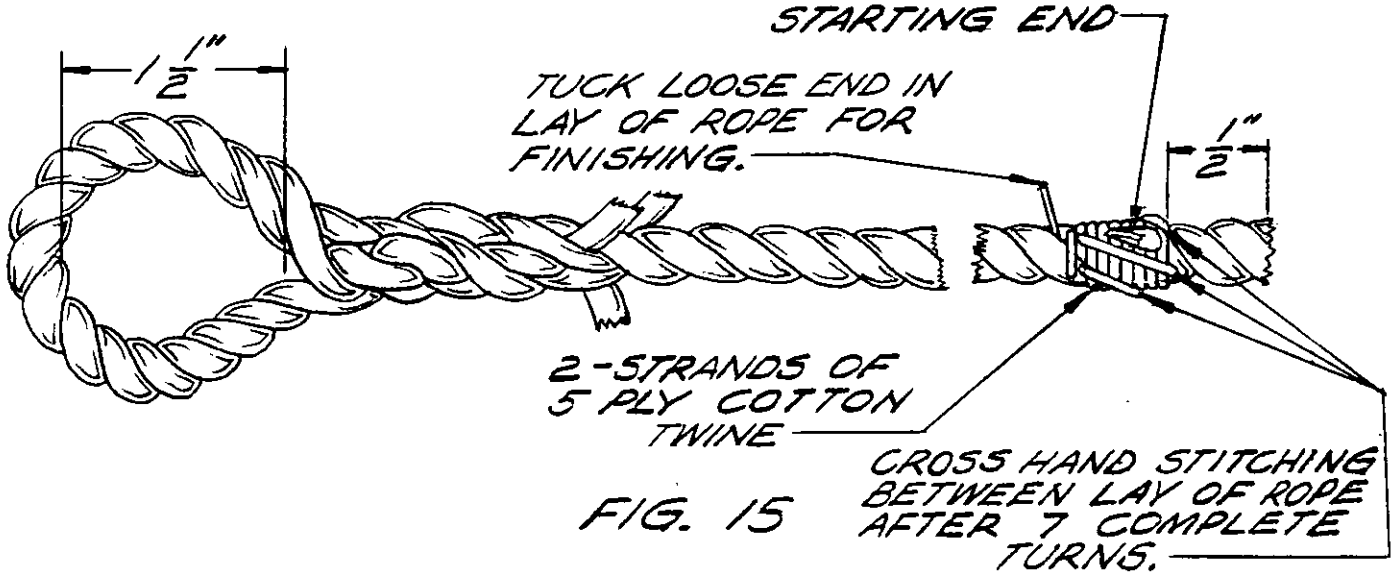


FIG. 15

5-4-57 1A

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:29Z
Check the source to verify that this is the current version before use.

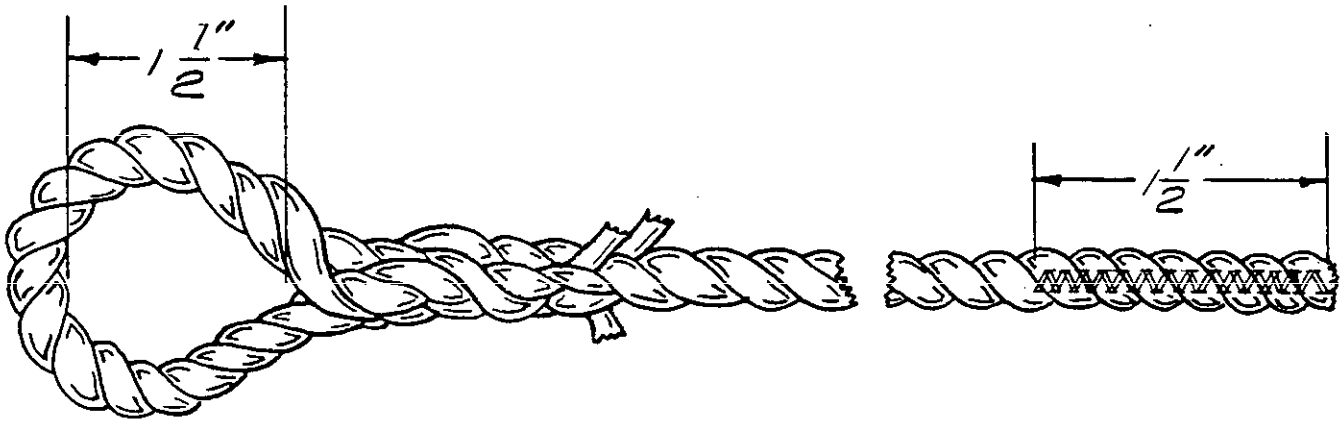


FIG. 16

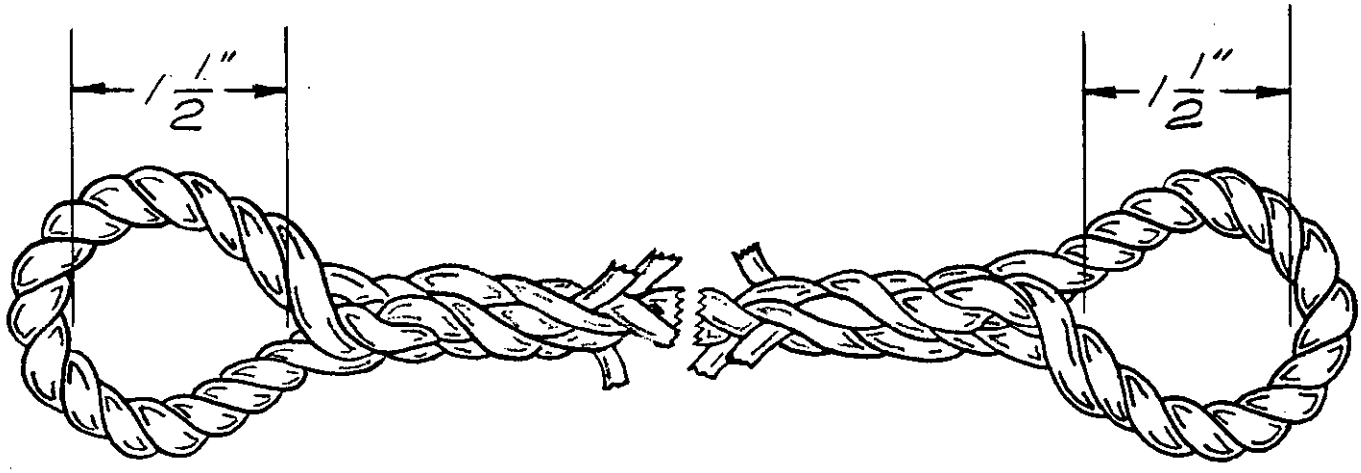


FIG. 17

5-4-572 A

Source: https://assist.dla.mil -- Downloaded: 2026-01-13T13:39Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

US ARMY NATICK ~~LABORATORIES~~ Development Center

NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AMXNM-TDT

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

Commander
US Army Natick ~~Laboratories~~ Development Center
ATTN: ~~STSNL-TDC~~ AMXNM-TDT
Natick, MA 01760

FOLD

2129

87%

Source: https://assist.dla.mil -- Downloaded: 202610-16T13:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-L-1709D - LINES, TENT

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 JAN 72 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 20260-16T13:39Z
Check the source to verify that this is the current version before use.