MIL-M-1715C(GL)
20 December 1968
SUPERSEDING
MIL-M-1715B(GL)
3 August 1965

MILITARY SPECIFICATION

MIRROR, GLASS, POSTURAL TRAINING, TRIPLE, FULL-LENGTH

1. SCOPE

1.1 This specification covers one type and size glass, triple-section, full-length mirror (see 6.1).

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

DD-G-451	-	Glass, Plate, Sheet, Figured (Corrugated and Flat, for Glazing Mirrors and other Uses)
DD-M-411	-	Mirror, Glass
FF-S-111	-	Screws, Wood, Slotted-Head
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon
TT-E-491	-	Enamel, Gloss, Synthetic, (for Metal and Wood Hospital Furniture)
TT-P-659	-	Primer-Surfacer, Synthetic, Tints and White (for Metal and Wood Surfaces)
TT-R-251	-	Remover; Paint (Organic Solvent Type)
MMM-A-188	-	Adhesive; Urea-Resin-Type (Liquid and Powder)
MMM-A-193	-	Adhesive; Vinyl Acetate Resin Emulsion
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner
PPP-B-636	-	Box, Fiberboard
PPP-B-640	-	Boxes, Fiberboard, Corrugated, Triple-Wall
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-L-10547 - Liners, Case, Waterproof
MIL-R-25134 - Remover, Paint and Lacquer, Solvent Type

STANDARDS

FEDERAL

Fed. Std. No. 595 - Colors

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWING

ARMY NATICK LABORATORIES

2-5-38 - Mirror, Glass, Postural Training, Triple, Full-Length

(Miniature copy of Drawing 2-5-38, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

U.S. DEPARTMENT OF COMMERCE

Product Standard PS 1-66 - Softwood Plywood/Construction and Industrial

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D2016-62 - Standard Methods of Test for Moisture Content of Wood

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.)

3. REQUIREMENTS

3.1 First article.- When specified (see 6.2), before production is commenced, a sample mirror conforming to this specification shall be submitted or made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

3.2 Material.- The material shall conform to the referenced specifications and to the requirements specified herein.

* 3.2.1 Plywood.- Plywood shall conform to B-D INT-DFPA of Product Standard PS 1-66, or better.

3.2.2 Solid wood components.- Solid wood components, except dowels, shall be fabricated as shown on Drawing 2-5-38 from any one of the following species:

Ash, White	Magnolia
Oak	Walnut
Maple	Yellow Poplar
Elm	Hickory
Sycamore	Beech
Cherry	Birch

3.2.3 Dowels, wood.- Dowels shall be as shown on Drawing 2-5-38 and shall be fabricated of Hickory, Hard Maple, Beech, or Birch (Sweet or Yellow).

* 3.2.4 Glass.- The glass shall be type I, class 1, mirror glazing quality, conforming to DD-G-451. The glass shall be 1/4 inch thick, plus or minus 1/32 inch.

3.2.5 Steel, sheet and strip.- Steel sheet or strip shall conform to cold rolled or hot rolled, commercial quality of QQ-S-698, as applicable.

3.2.6 Hinges.- Hinges shall be two-way, double action, fabricated from steel, and conform to a design and shape as normally used by the industry.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

3.2.7 Casters.- Casters shall be commercial furniture casters of the type illustrated on the drawing. Casters shall have a ball bearing swivel and ball bearing wheel. The wheel tread shall be fabricated of hard rubber in accordance with manufacturer's current commercial practice. The casters shall be equipped with an angle fitting containing two screw holes in each side of the angle for securing the caster to the mirror frame as shown on the drawing.

3.2.8 Screws, wood.- The wood screws shall be of the size, type and material specified on the drawing and shall conform to style 1s and 2s, as applicable, of FF-S-111. Screws shall be either cadmium or zinc plated.

3.2.9 Hardware, miscellaneous.- The miscellaneous hardware, consisting of machine screws, wing nuts, washers and wire nails, shall be commercially available items of the types and sizes shown on the drawings.

3.2.10 Adhesive.-

3.2.10.1 Urea formaldehyde resin.- Urea formaldehyde resin adhesive shall conform to MMM-A-188.

3.2.10.2 Vinyl acetate resin.- Vinyl acetate resin adhesive shall conform to MMM-A-193.

3.2.11 Primer.- The primer shall conform to TT-P-659.

3.2.12 Enamel.- The enamel shall conform to class A of TT-E-491. The color shall be light gray, Color Number 16376 of Fed. Std. No. 595.

3.3 Construction.- The mirror shall be constructed in accordance with the design, detail and dimensions as shown on Drawing 2-5-38 and as specified herein.

3.3.1 Mirror.- The mirrors shall be fabricated of glass specified in 3.2.4. The glass shall be silvered, then copper electroplated. The copper backing of the mirror shall then be covered with an organic protective coating. The mirror shall show no exposed silver when tested for copper electroplating as specified in 4.4.1. The mirror shall show no pinholes, spots, cloudiness or separation of the coating from the glass when tested as specified in 4.4.2.

3.3.2 Frames.- Frames shall be made from wood specified in 3.2.2. Only one species of wood shall be used on each frame. Frame members shall be made from one piece of wood, free from decay, rot, split, checks, knots, holes and warp. All exposed surfaces of wood material shall be evenly and smoothly dressed. The corners of the frames shall be coped and glued together. Further strengthening shall be by use of dowels specified in 3.2.3, secured in place with glue

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

specified in 3.2.10.1 or 3.2.10.2. The dowels shall be spirally or longitudinally grooved in accordance with commercial practice. The moisture content of the dowels at time of assembly shall be not more than 5 percent when tested as specified in 4.3.2.2. The moisture content of the solid wood components at time of assembly shall be not less than 5 and not more than 9 percent when tested as specified in 4.3.2.2.

3.3.2.1 Panel backs.- The panel backs shall be made from plywood specified in 3.2.1 and shall be cut so as to fit snugly in the frame. The lower grade face of the plywood shall be toward the mirror. Wood retaining strips shall be used between the panel backs and the mirrors. The panel backs shall be secured to the frames with wood screws specified in 3.2.8 and spaced not more than 10 inches on centers. All wood screws shall be screwed into place and not driven.

* 3.3.3 Side mirror frame.- Each side mirror frame or wing of the triple mirror shall be attached to the center unit by three hinges specified in 3.2.6. Hinges shall be in the location as shown on the drawing. Each side mirror frame shall open and close without any binding of the hinges when tested as specified in 4.4.3.

* 3.3.4 Casters.- Each triple mirror shall be equipped with four ball-bearing casters specified in 3.2.7 and located as shown on the drawing. Screw holes in the angle portion shall be countersunk so that heads of wood screws will be flush with surface of the angle when assembled to the frame. After attaching the casters to the mirror frame, the casters shall not bind as the mirror is moved from one location to another when tested as specified in 4.4.4.

3.3.5 Locking strips and locking strip braces.- Locking strips and locking strip braces shall be fabricated of steel specified in 3.2.5 and shall conform to the dimensions specified on the drawing.

3.4 Finish.-

3.4.1 Wood surface preparation.- After assembly of the frames and prior to hardware attachment when Ash, Oak or Walnut is used in frame fabrication, the wood shall have a commercial neutral filler applied. The filler shall fill the pores and provide a smooth base for primer application.

3.4.2 Priming.-

3.4.2.1 Hardware.- Prior to assembly, the hardware, except screws, shall be given a coat of primer specified in 3.2.11.

3.4.2.2 Frames.- Prior to hardware attachment, the frames shall be given a coat of primer specified in 3.2.11. The primer coat shall be thoroughly dry before enameling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

3.4.3 Enameling.- After attachment of hardware, the complete mirror assembly, except casters and glass, shall be given a full hiding coat of enamel specified in 3.2.12. The enamel shall level out to produce a dry, smooth, and uniform coating.

3.5 Marking for identification.- Mirrors shall be marked with the manufacturer's name or readily identifiable trademark and Federal Stock Number on the plywood panel back.

* 3.6 Workmanship.- The assembled mirror shall be free from burrs, slivers and sharp corners, gouges or torn grain. Enameling shall be dry before assembling and packing, and free from brush marks, orange peel, runs, wrinkles or drops. Side mirrors shall hang straight.

4. *QUALITY ASSURANCE PROVISIONS*

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article inspection.- When a preproduction sample is required, it shall be examined for the defects in table III, dimensions specified, and tested as specified in 4.4.3 and 4.4.4.

* 4.3 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.2 In-process inspection.-

4.3.2.1 In-process examination.- Examination shall be made during the manufacturing process to determine whether the required operations in table I are accomplished as specified. Whenever nonconformance is noted, correction shall be made to affected items and process.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

TABLE I.- In-process examination

Operation	Requirement paragraph
Dowels tight or glued	3.3.2
Joint coped and glued	3.3.2
One species of wood used in each frame	3.3.2
Screws are not hammer driven	3.3.2.1
Lower grade plywood face toward the mirror	3.3.2.1
Filler applied when applicable	3.4.1
Primer coat applied to hardware	3.4.2.1
Primer coat applied to wood	3.4.2.2

4.3.2.2 Intermediate testing.- Testing shall be performed as specified in table II and 4.3.2.3.

4.3.2.3 Testing for moisture content of wood.- The moisture content of wood component and dowel requirements in 3.3.2 shall be determined in accordance with ASTM-D 2016-62 at time of assembly. When testing is performed by the electric moisture meter method, three determinations shall be made on each sample unit. The average of the three determinations shall be the moisture content of the sample unit. The lot shall be all machined wood components or dowels as applicable, prepared under the same conditions, stored as a group, and offered for inspection at one time. The sample unit shall be one wood component or dowel. The inspection level shall be S-1 with an acceptable quality level (AQL) of 4.0, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

TABLE II.- Intermediate testing

Component and lot expressed in terms of	Characteristic	Requirement paragraph	Test method or paragraph	Requirement applicable to: Individual unit	Requirement applicable to: Lot average	Number determinations per sample unit	Results reported as	Sample unit	Inspection level	AQL
Mirror glass	Electro-copper plate	3.3.1	4.4.1	X		1	Pass or fail	One 9 inch by 9 inch piece	1/	1/
	Salt spray resistance	3.3.1	4.4.2	X		1	Pass or fail	One 9 inch by 9 inch piece	1/	1/

1/ These tests shall be performed on specimens of mirror glass from each production lot. Any nonconformance shall be cause for rejection of the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

4.3.3 Inspection of the end item.- The lot shall consist of completely assembled and finished mirror assemblies offered for inspection at one time. The unit of product shall be one mirror assembly.

* 4.3.3.1 Visual examination.- The mirror shall be examined for defects in table III. The inspection level shall be II with an AQL of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE III.- Classification of defects

Examine	Defect	Classification Major-	Minor
Finish, enamel	Not color specified.		X
	Tacky.		X
	Not smooth or uniform; brush marks, orange peel, runs, wrinkles, or drops.		X
Construction (wood and metal components)	Split or fracture completely through metal.	X	
	Sharp edges, burrs, fins, or protrusion.	X	
	Locking strip or brace missing.	X	
	Two or more screws in back panel missing.	X	
	Locking strips, braces, hinges, machine screws, wing nuts and casters not attached as specified, i.e., mispositioned or wrong location.		X
	Each frame member not one piece construction.	X	
	Not free from decay, rot, split, checks, knots, holes, and warp.	X	
	Glue joints at corners not tight.	X	
	Side mirrors not hung straight.		X
Quality of mirror glass	Glass cracked or broken.	X	
	Pronounced ream.	X	
	Stones or skim.	X	
	Scratched or chipped.	X	
	Blurred or distorted reflection in mirror, strings in central area of mirror or light strings in outer area of mirror.	X	
	Silver backing on mirror defective (lifted or separated, scratched or sulfide spots).	X	
Marking	Omitted, illegible, incorrect, incomplete.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

4.3.3.2 Dimensional examination.- The assembled mirror shall be examined for defects in dimensions. Any dimension that is not within specified requirements shall be classified a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.3.3.3 Testing of the end item.- The assembled mirrors shall be tested as specified in 4.4.3 and 4.4.4. The inspection level shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units.

* 4.3.4 Examination of preparation for delivery.- An examination shall be made to determine that packaging, packing, and markings as required by section 5 of this specification are complied with. Defects shall be as indicated in table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot shall be all of the shipping containers offered for inspection at one time. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE IV.- Examination of preparation for delivery

Examine	Defect
Marking (exterior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components such as taping of covering, interior fiberboard pads not providing correct clearance.

* 4.3.4.1 Examination of shipping containers.- Examination for defects in closure and strapping of shipping containers shall be in accordance with the appendix of the applicable container specification.

4.4 Tests.-

4.4.1 Copper plating test.- The mirror shall be tested in accordance with the copper plating test as specified in DD-M-411 to determine compliance with 3.3.1.

* 4.4.2 Salt spray test.- The mirrors shall be tested in accordance with the salt spray test specified in DD-M-411 to determine compliance with 3.3.1.

* 4.4.3 Hinge tests.- Each side mirror shall be opened and closed 10 times to determine compliance with 3.3.3.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

4.4.4 Rolling test.- The mirror shall be rolled forward on a level surface, a distance of 20 feet and then rolled backwards to the starting position to determine compliance with 3.3.4.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A or C as specified (see 6.2).

* 5.1.1 Level A.- Finished surfaces of the mirror (glass and wood) shall be covered with 30-pound basis weight (24 by 36-500) machine-glazed kraft paper or waxed paper. The covering shall be secured in place with tape conforming to type III, grade B of PPP-T-45. One end unit of the mirror shall be folded flat on the center unit with the front surfaces adjacent and the other end unit folded flat on the center unit with the backs adjacent. The locking strips shall be secured with the wing nuts provided. Each mirror shall then be packaged in a snug-fitting, corrugated fiberboard folder conforming to style OPF, type CP, class domestic, A flute, variety DW, grade 275 of PPP-B-636. The plywood back surface of the mirror shall be adjacent to the flap area of the folder. Fiberboard pads shall be placed between casters of folded units of such thickness as to provide a minimum clearance of 3/4 inch between casters and end of folder. Closure shall be in accordance with the appendix of PPP-B-636.

5.1.2 Level C.- Each mirror shall be packaged to afford adequate protection against damage during shipment from supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A.- Each mirror, packaged as specified in 5.1, shall be packed on edge in a snug-fitting cleated plywood or nailed wood shipping container conforming to overseas type of PPP-B-601 or class 2, style 4-1/2 of PPP-B-621. Each shipping container shall be provided with a type I or II, grade C case liner conforming to MIL-L-10547. Each shipping container shall be provided with skids and closed and strapped in accordance with the applicable container specification or appendix thereto.

* 5.2.2 Level B.- Each mirror, packaged as specified in 5.1, shall be packed as specified in 5.2.1, except that the waterproof case liner shall not be required and shipping containers shall conform to domestic type, style A or B of PPP-B-601; class 1, style 4-1/2 of PPP-B-621; or class 1, style C, No. 2 end of PPP-B-640. Skids shall be secured to containers conforming to PPP-B-640 as specified in PPP-B-601, except that filler cleats shall not be required. Metal washers having a minimum 3/4-inch outside diameter, or metal clips specifically designed for use in nailing wood members to fiberboard, shall be placed between the nail head and the fiberboard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

5.2.3 Level C.- Mirrors, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

* 5.3 Marking.- In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

5.3.1 Additional marking.- Arrows or prominent marks shall be placed on the sides of each shipping container to indicate that the mirrors shall be shipped in an on-edge position. The word "UP" shall be placed at the point of the arrows in letters not less than 2 inches in height. The front panel of each shipping container shall be plainly marked as follows:

UP UP

GLASS
FRAGILE, HANDLE WITH CARE

The top shall be plainly marked as follows:

GLASS
FRAGILE, HANDLE WITH CARE
TOP
THIS SIDE UP

6. NOTES

6.1 Intended use.- This mirror is used primarily for postural training and is designed for use in Military dispensaries and hospitals. It is also suitable for other uses where a triple full-length mirror is required.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) First article.- When preproduction sample is required (see 3.1).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 Glossary of terms.

6.3.1 Central area.- That portion of the mirror considered to form an oval or circle centered on the piece, the length of axis or diameter of which does not exceed 80 percent of the over-all dimension.

6.3.2 Scratches.- Any marking or tearing of the surface appearing as though it had been done by either a sharp or rough instrument.

6.3.3 Strings.- Light wavy transparent lines appearing as though a thread of glass had been incorporated into the sheet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

6.3.4 Ream.- An area of strings or of nonhomogeneous glass incorporated in the plate, appearing as a knotty, hairy mass mixed with clear glass.

6.3.5 Skim.- Streaks of dense seed with accompanying small bubbles.

6.3.6 Stones.- Any opaque or partially melted particles or rock, clay, or batch ingredient imbedded in the glass.

6.4 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL

Review activity:


Army - MD

Preparing activity:

Army - GL

Project No. 7105-A148

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

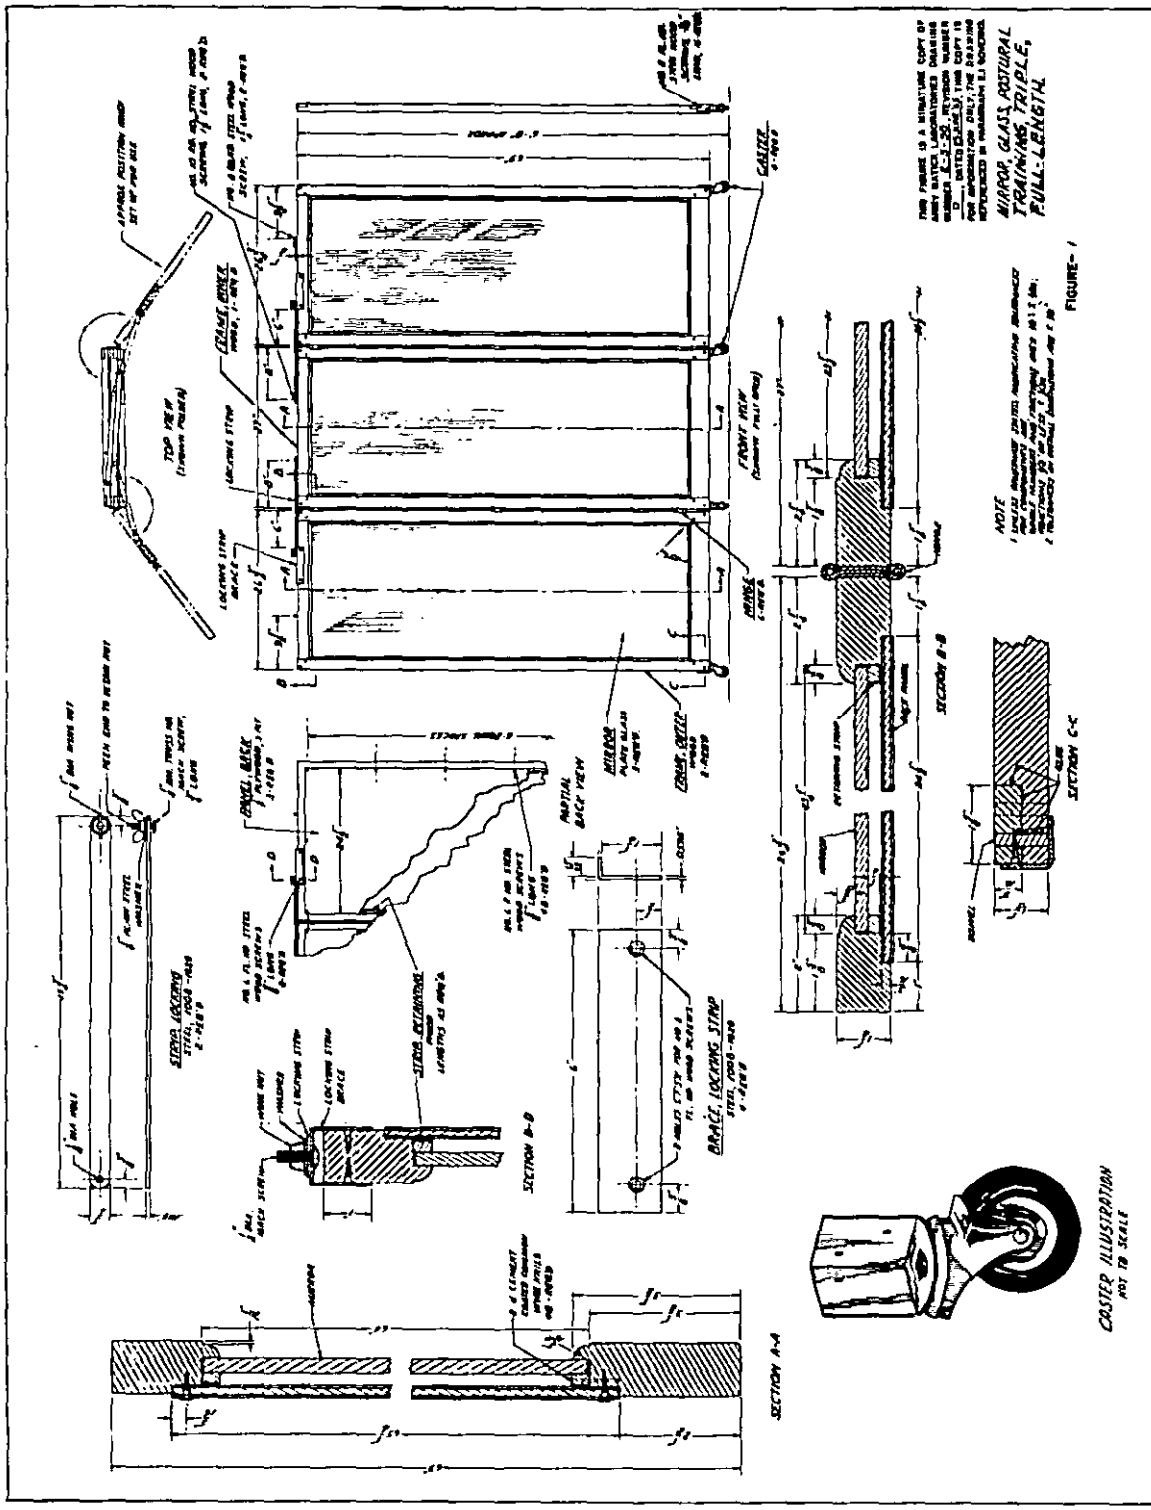

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor; involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
Mirror, Glass, Postural Training, Triple, Full-Length MIL-M-1715C(GL)

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

☆ U. S. GOVERNMENT PRINTING OFFICE: 1969-341-515/A-3738

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T13:40Z
Check the source to verify that this is the current version before use.