MIL-C-22845A(AS)
22 January 1968
Superseding
MIL-C-22845(Wep)
20 February 1961

MILITARY SPECIFICATION

CARTRIDGE, DELAY, MARK 35 MOD 0

This specification has been approved by the Naval Air Systems Command, Department of the Navy.

1. SCOPE

1.1 This document governs the manufacture, assembly and preparation for delivery of the MARK 35 MOD 0 delay cartridge and the methods of inspection and tests upon which product acceptance will be based.

2. APPLICABLE DOCUMENTS

2.1 The following specifications, standards, drawings and publications, of the issue in effect on date of invitation for bids, form a part of this document to the extent specified herein.

SPECIFICATIONS

Military

MIL-D-21625	Design and Evaluation of Cartridges for Cartridge Actuated Devices
MIL-M-21383	Manganese Delay Composition
MIL-P-20444	Primer, Percussion, M42, Loading, Assembling and Packing
MIL-P-116	Preservation, Methods of
MIL-P-22264	Powders, Ignition, Gasless

FSC 1377

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:07Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage

DRAWINGS

Bureau of Naval Weapons

LD 419707	Cartridge, Delay, MARK 35 MOD 0, List of Drawings and Specifications
LD 537899	Container, Inner, for Cartridges, Power Source, List of Drawings and Specifications
LD 537900	Container, Outer, for Cartridges, Power Source, List of Drawings and Specifications

Ordnance Corps of the Army

Ordnance Dwg. 8799925	Primer, Percussion, M42, Assembly

PUBLICATIONS

BUSANDA Instruction 4030.17	Preservation, Packaging, Packing and Marking; Navy Policy for

Bureau of Naval Weapons

OP 5	Ammunition Ashore (This publication is not furnished to bidders and contractors by the procuring activity. Contractors should contact the Government inspector for use of the publication.)
WR-43	Preparation of Quality Assurance Provisions

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:07Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer.)

2.2 Other publications. The following document forms a part of this specification. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

CODE OF FEDERAL REGULATIONS

49 CFR 71-78	Transportation, Interstate Commerce Commission, Explosives and Other Dangerous Articles

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402. Orders for the above publication should cite the latest edition and supplements thereto.)

3. REQUIREMENTS

3.1 General.

3.1.1 The MARK 35 MOD 0 delay cartridge covered by this document shall be manufactured in accordance with LD 419707 and all documents listed thereon.

3.2 Material. All materials used in the manufacture of the delay cartridges shall conform strictly with the specification referred to on the respective Bureau of Naval Weapons drawings unless specific approval in writing covering a departure therefrom has been obtained from the Navy design activity prior to manufacture. When alternate materials or methods of manufacture are specified on the drawings, the bidder's selections shall be clearly stated in the proposal.

3.2.1 Preproduction sample. Unless otherwise specified by the procuring activity, a preproduction sample of 76 MARK 35 MOD 0 delay cartridges shall be manufactured using the same methods and procedures proposed for the production lot. The sample will be tested as specified in 4.3.2 and is for the purpose of determining that the contractor, prior to starting production, is capable of manufacturing items which comply with the technical requirements of the contract.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:07Z
Check the source to verify that this is the current version before use.

3.3 Primary components. For the purpose of this specification the percussion primer, the main propellant charge, the gasless ignition powder and the manganese delay composition are defined as primary components. See 4.3.3.

3.4 Primer. The M42 percussion primer used in the MARK 35 MOD O delay cartridge shall be manufactured in accordance with Army Ordnance Drawing 8799925, loaded with Remington Arms primer mixture styphnate composition No. 5086, and accepted in accordance with the requirements of MIL-P-20444. The primers shall be from lots manufactured within a year past. See 4.7.1.

3.4.1 Primer X-ray. All primers shall be X-rayed and screened for defects as prescribed in 4.7.2.

3.5 Manganese delay composition. The manganese delay composition shall be accepted in accordance with requirements of MIL-M-21383 and loaded into the cartridge as specified on Bureau of Naval Weapons Drawing 2230818 of LD 419707.

3.6 Gasless ignition powder. The A-1A gasless ignition powder shall be accepted in accordance with the provisions of MIL-P-22264 and loaded into the cartridge as specified on Bureau of Naval Weapons Drawing 2230818 of LD 419707.

3.7 Propellant charge.

3.7.1 Quantity. All propellant and booster charges shall be as specified on Bureau of Naval Weapons Drawing 2164483 of LD 419707. Charges shall be determined by weight rather than by volume measurements.

3.7.2 Smokeless powder, handling and loading. Do not subject the smokeless powder to unnecessary handling or exposure to the atmosphere. The handling and loading of smokeless powder exposed to the atmosphere shall be performed only under conditions that do not permit the relative humidity to exceed 75 percent.

3.7.3 Smokeless powder condition. The smokeless powder utilized shall exhibit no evidence of decomposition. See 4.7.3.

3.7.4 Change of propellant lot. Whenever a change occurs in the propellant lot for the main charge, a new charge determination shall be made by performing the test prescribed in 4.9.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:07Z
Check the source to verify that this is the current version before use.

3.8 Cartridge inspection.

3.8.1 Visual inspection. The complete cartridge shall be free of visible defects noted in 4.7.4.

3.8.2 Leakage. There shall be no leakage of air in the completed cartridge. See 4.7.5.

3.8.3 X-ray. All cartridges manufactured under contract shall pass X-ray examination of 4.7.6.

3.9 Ballistic requirements. Cartridges from each production lot, selected in accordance with 4.7.7.1, shall meet the requirements listed below when subjected to the test prescribed in 4.7.7.

3.9.1 Delay time. The Upper (U) and Lower (L) limits of delay time shall be U = 0.750 second and L = 0.500 second. See 4.7.7.2.1.

3.9.2 Maximum pressure. The Lower (L) limit of maximum pressure shall be 750 psi for a minimum of 0.020 second at Points A and B of Figure 1. See 4.7.7.2.2.

3.9.3 Misfire. There shall be no misfires. See 4.7.7.3.

3.10 Workmanship. Cartridges shall be constructed and finished in a manner to assure compliance with all requirements of this specification. Particular attention should be directed to dimensions, finishes and coatings.

4. QUALITY ASSURANCE PROVISIONS

4.1 Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling. Unless otherwise specified, and when applicable, the sampling plans and procedures used in the determination of the acceptability of products submitted by a supplier shall be in accordance with Table I, General Inspection Level II of MIL-STD-105. Unless otherwise specified in the contract, order or requisition, all samples for test purposes shall be provided at the expense of the contractor.

Source: https://assist.dla.mil -- Downloaded: 20260-19T14:07Z
Check the source to verify that this is the current version before use.

4.3 Lots.

4.3.1 Inspection lots. Inspection lot definition, formation and size shall be in accordance with MIL-STD-105.

4.3.2 Preproduction sample. Before entering into quantity production, an acceptable preproduction sample of 76 MARK 35 MOD 0 delay cartridges shall be prepared. Of these cartridges, 66 shall be expended in the tests listed below and ten shall be retained for investigative purposes. A preproduction sample acceptable for environmental and ballistic testing shall be defined as a sample which has met the requirements of paragraphs 3.1 through 3.8 of this specification. The contractor shall deliver the delay cartridges to the activity designated by the contracting agency for test. The environmental tests to be performed on the preproduction sample and the number of delay cartridges required for each test are: 15 "g" shock (6), vibration (6), 14 days temperature and humidity cycling (18). These cartridges, subsequent to exposure to the environmental tests described in MIL-D-21625, are to be conditioned for a minimum of 6 hours at +70°F ± 5°F together with 12 new cartridges that received no previous environmental conditioning and fired in accordance with 4.7.7.1. In addition, 12 delay cartridges each shall be conditioned for 12 hours at -65°F ± 5°F and +160°F ± 5°F and fired as prescribed in 4.7.7.1 to check temperature sensitivity. Acceptance of preproduction sample shall be as specified in 3.9. Any quantity production prior to notification by the contracting agency of preproduction sample acceptability shall be at the contractor's risk. The preproduction cartridges will not be applied as part of the quantity specified for delivery by the contract.

4.3.3 Production lot. The suggested production lot size is 151 minimum and 500 maximum delay cartridges. Cartridges required for all test purposes shall be selected from the production lot and will not be applied as a part of the quantity specified for delivery by the contract. Only primary components from a single lot shall be used in a production lot of cartridges. One primary component production lot may be used in more than one cartridge production lot. Cartridges selected for the ballistic test shall be delivered to the activity designated by the contracting agency.

4.4 Gages. The contractor shall provide himself with gages as necessary to insure that the material to which this specification applies will meet the dimensional requirements shown on the applicable drawings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:07Z
Check the source to verify that this is the current version before use.

4.5 Classification of characteristics. The characteristics verified by the tests and examinations herein are classified as Critical, Major or Minor in accordance with WR-43. Tests and examinations that verify critical characteristics are identified by the symbol (C) and major characteristics by the symbol (M). The number following the classification symbol indicates the serial number of test or examination. Tests and examinations which are not annotated with a classification code are classified minor.

4.6 Quality conformance inspection. Quality conformance inspection shall consist of verification of the characteristics classified on the drawings of LD 419707, and the following tests and examinations.

Item	Nature of Test	Requirement	Test	Classification (WR-43)
Primary Component	Single lot verification	3.3	4.3.3	(M101)
Primer	Age, loading and acceptance verification	3.4	4.7.1	(C1)
Primer	X-ray	3.4.1	4.7.2	(C2)
Delay Composition	Acceptance and loading verification	3.5	---	(C3)
Ignition Powder	Acceptance and loading verification	3.6	---	(C4)
Propellant and Booster Charges	Type and weight verification	3.7.1	---	(C5)
Smokeless Powder	Condition	3.7.3	4.7.3	(C6)
Cartridge	Ballistics (change in propellant lot)	3.7.4	4.9	(C7)
Cartridge	Visual inspection	3.8.1	4.7.4	(M102)
Cartridge	Leakage	3.8.2	4.7.5	(C8)
Cartridge	X-ray	3.8.3	4.7.6	(C9)
Cartridge	Ballistics	3.9	4.7.7	(C10)

4.6.1 Packing, packaging and marking. (M103) The inspector shall ascertain that the packing and packaging of the cartridges and the container markings conform to Section 5 of this document.

4.7 Tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:07Z
Check the source to verify that this is the current version before use.

4.7.1 Primer verification. Verification shall be obtained that the primers to be used were manufactured within a year past, and were furnished from lots certified by the supplier to have been loaded as specified in 3.4 and accepted in accordance with the provisions of MIL-P-20444.

4.7.2 Primer X-ray. Primers should be mounted in suitable grooved racks. For the most revealing exposure, the primers are laid on their side with the anvil cutouts vertical. Pressure-sensitive tape may be used as an aid in positioning the primers. Reject any that are questionable from any standpoint, especially for: cracked or off-center anvils; anvil abnormally close to primer cap dome; charge missing or abnormally thin; charge broken, cracked or porous.

4.7.3 Smokeless powder condition. Smokeless powder shall be inspected in accordance with the applicable portions of paragraphs 1308-1318 and 1322 of OP 5. Evidence of decomposition shall be cause for rejection.

4.7.4 Cartridge inspection. Examine all cartridges and reject for: dents, deep scratches, split or cracked edges, chipping or flaking of the anodized finish, sharp edges, primer not properly crimped in place or other defects which may conceivably prevent entry into the firing chamber or affect the stability or resistance to moisture.

4.7.5 Leakage. Each cartridge in the preproduction sample and ballistic sample will be leak tested in a dry gas leak tester. Cartridges which exhibit a leak rate in excess of 10^{-5} cc/sec of air at a pressure differential of 1.0 atmosphere $\pm$ 0.1 atmosphere shall be considered defective. If one or more cartridges of the ballistic sample leak, then a leak test of each cartridge of the lot being tested shall be required. If a 100 percent leak test of the lot is required, it shall be at the expense of the contractor. Cartridges which exhibit a leak rate in excess of that specified above shall be rejected.

4.7.6 X-ray of cartridge. Examine all cartridges by X-ray and any observable imperfections in assembly shall be cause for rejection. X-ray plates may be destroyed after ballistic acceptance of cartridges.

4.7.7 Ballistic tests.

4.7.7.1 The number of MARK 35 MOD 0 delay cartridges selected from each production lot for the ballistic tests shall be in accordance with the requirements of Table I, Inspection Level II of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T14:07Z
Check the source to verify that this is the current version before use.

An additional ten cartridges shall be furnished with each test sample for investigative purposes. The sample lot shall be accepted if the sample fulfills the ballistic requirements of 3.9 upon performance of the following ballistic test. An equal number of delay cartridges, to the nearest unit, shall be conditioned at -65°F ± 5°F, +70°F ± 5°F and +160°F ± 5°F for a minimum of 6 hours prior to firing in a harness release actuator, Propellex P/N 149. The actuator piston when acting on a 1.0 pound mass shall uncover the gas port after a stroke of 1.25 inch. Gases shall be ported through a "T". Resistoflex hoses, R3806-4-0180 and R3806-4-0164 or equivalent, shall be attached to each end of the "T". The actuator and each hose end shall be adapted to measure pressure versus time. Instrumentation shall also be provided to record the instant the sear is removed from the firing mechanism. Prior to each firing, the chamber and the hose system shall be thoroughly cleaned and checked for air leakage. The production lot shall be accepted if the sample fulfills the following criteria.

4.7.7.2 Acceptance criteria.

4.7.7.2.1 Delay time. The delay time shall be measured from the instant the sear is removed from the firing mechanism to first indication of cartridge pressure rise. The lot shall be acceptable with respect to delay time if the ballistic sample meets the requirements of 3.9.1. The acceptance number shall be 0 and the rejection number shall be 1.

4.7.7.2.2 Maximum pressure. The maximum pressure at the end of the hose, Points A and B in Figure 1, shall be measured over an interval of 0.020 second. The lot shall be acceptable with respect to maximum pressure if the ballistic sample meets the requirements of 3.9.2. The acceptance number shall be 0 and the rejection number shall be 1.

4.7.7.3 Misfire. A cartridge that does not fire under the conditions specified in 4.7.7 shall be considered defective and the lot considered unacceptable, unless the misfire is clearly attributable to faulty test equipment or procedure.

4.8 Retest. There shall be no retests.

4.8.1 Test failure. If test failure is attributed to an assignable cause, excluding the test cartridges, the original test results should be discarded and the test reconducted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:07Z
Check the source to verify that this is the current version before use.

4.9 Change in propellant lot. Whenever a change in propellant lot for the main charge occurs, validity of the charge determination shall be verified by firing 12 MARK 35 MOD 0 delay cartridges each at temperatures of -65°F ± 5°F, +70°F ± 5°F and +160°F ± 5°F in the manner specified in 4.7.7.1. Results of these firings shall fall within the limits prescribed in 3.9.2.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. For definitions of packaging levels, see 6.4.

5.1.1 Level A. Level A packaging shall be used for packaging of all production lots for service use. Four cartridges shall be packaged in an inner container in accordance with Bureau of Naval Weapons Drawing 2240731 of LD 537899.

5.1.2 Level B. Not applicable.

5.1.3 Level C. When directed by the procuring activity, those cartridges which are intended for expenditure in preproduction sample testing and for production lot acceptance tests shall be packaged in accordance with Method III of MIL-P-116 and with the Code of Federal Regulations 49 CFR 71-78.

5.2 Packing. For definitions of packing levels, see 6.4.

5.2.1 Level A. Level A packing shall be used for packing of all production lots for service use. Six inner containers as described in 5.1.1 shall be packed in accordance with Bureau of Naval Weapons Drawing 2176010 of LD 537900.

5.2.2 Level B. Not applicable.

5.2.3 Level C. When directed by the procuring activity, cartridges intended for expenditure in preproduction sample testing and for production lot acceptance tests and are packaged in accordance with 5.1.3 shall be packed to afford protection against damage during direct shipment from the supply source to the first receiving activity for immediate use. Shipping containers shall be in accordance with the Code of Federal Regulations 49 CFR 71-78.

5.3 Markings.

5.3.1 Special markings. Marking of exterior containers shall be in accordance with the Code of Federal Regulations 49 CFR 71-78.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:07Z
Check the source to verify that this is the current version before use.

5.3.2 Normal markings. In addition to the markings required by contract or order, and as required by Bureau of Naval Weapons LD 537899 and LD 537900, unit packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES

6.1 Intended use. The MARK 35 MOD 0 delay cartridge is a percussion initiated cartridge designed to fire with a delay time of 0.625 second. The cartridge provides the power to release the harness, operate two face curtain cable cutters and fire two initiators in the T2 aircraft escape system.

6.2 Ordering information. Procurement documents should specify the following:

a. title, number and date of this specification;

b. whether preproduction inspection is required, and if so, specify the test activity;

c. production lot size and test activity (see 4.3.3);

d. items of data required for each preproduction and production lot (see 6.3).

6.3 Data. For the information of Contractors and Contracting Officers, any of the data specified in (a) subparagraphs below, (b) applicable documents listed in Section 2 of this specification or (c) referenced lower-tier documents, need not be prepared for the Government and shall not be furnished to the Government unless specified in the contract or order. The data to be furnished shall be listed on DD Form 1423 (Contractor Data Requirements List), which shall be attached to and made a part of the contract or order. NAVWEPS Form 4200/15 (Drawings, Lists, and Specifications Required) shall be attached where applicable.

6.3.1 Test report. Results of ballistic tests shall be forwarded to the Naval Air Systems Command and the procuring activity.

6.3.2 Data cards. The contract or order should state the format, quantity and destination of data cards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:07Z
Check the source to verify that this is the current version before use.

6.4 Definitions. The definitions of Levels A and C packaging and packing given below were extracted from BUSANDA Instruction 4030.17.

6.4.1 Level A packaging. The degree of preservation and packaging which will afford adequate protection against corrosion, deterioration and physical damage during handling, shipment, indeterminate storage and world-wide redistribution.

6.4.1.1 Level C packaging. The degree of preservation and packaging which will afford adequate protection against corrosion, deterioration and physical damage during shipment from supply source to the first receiving activity for immediate use. This level may confrom to supplier's commercial practice when such meets the requirements of this level.

6.4.2 Level A packing. The degree of packing which will afford adequate protection during shipment, handling, indeterminate storage and world-wide redistribution.

6.4.2.1 Level C packing. The degree of packing which will afford protection against damage during direct domestic shipment from the supply source to the first receiving activity for immediate use. This level in general will conform to applicable carrier rules and regulations and may be the supplier's commercial practice when such meets the requirement of this level.

6.5 Explosives safety precautions.

6.5.1 Applicability. The loading, assembly and handling of the explosives, subassemblies and the finished items covered by this specification involve hazardous operations and therefore require suitable explosive safety precautions. At plants of the Naval Air Systems Command, Department of the Navy, and other Government plants where the Government is responsible for safety, the precautions listed below are mandatory. These same minimum provisions are recommended for observance by a contractor or manufacturer that explosively loads the item covered in this specification in order to fulfill his own safety responsibility. Other warnings and precautions, pertaining to the operational effectiveness or safety of the specified item during its use (for example, during its handling, launching or firing), are included in the detailed technical requirements of the specification. Use of this specification shall not be construed to replace other safety regulations of governmental agencies or to relieve the contractor or manufacturer of responsibility for the safety of his operations.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:07Z
Check the source to verify that this is the currentversion before use.

6.5.2 Personnel and equipment. Proper care must be exercised at all times to protect personnel from accidents, fires or explosions and to limit damage to equipment and loading areas. In connection with the above, the precautionary measures in the following paragraphs should be observed. (See also paragraph 6.5.4, Static and electrical and other applicable parts of these safety precautions.)

6.5.2.1 Explosives operations shall be kept under strict supervision. Periodic inspections shall be employed to assure compliance with established safety regulations.

6.5.2.2 Safe equipment and methods should be utilized for handling and transporting explosives and loaded parts.

6.5.2.3 Where required, remote control-barricaded-handling equipment shall be used for explosives operations such as mixing, pouring, weighing, charging, sifting, drying, pressing, casting, crimping, etc.

6.5.2.4 Employ properly proportioned and properly located protective barricades, screens or shields at all required points.

6.5.2.5 Maintain equipment such as presses, dies, crimpers, blenders, mixers, sifters, conveyors, and the like in safe operating condition.

6.5.2.6 Enforce, where necessary, the wearing of suitable safety footwear, gloves, goggles, respirators, and impregnated garments to protect personnel against burns, poisoning and associated industrial hazards.

6.5.2.7 During static tests, propulsion units such as rocket motors shall be restrained against full thrust to prevent flight if ignited, for example, during test of igniter circuit. Also, means shall be provided to harmlessly vent flames and exhaust gases.

6.5.3 Operating procedures. All loading operations shall be conducted in full accordance with a formalized operating procedure which shall include the following:

6.5.3.1 Keep only minimum, limited quantities of explosives and completed or partially loaded parts present at each stage of operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:07Z
Check the source to verify that this is the current version before use.

6.5.3.2 Allow no fires, exposed electrical or other sparking equipment, and little or no flammable material to be present in loading, handling and storage spaces. Enforce proper "Match" and "No Smoking" rules where necessary.

6.5.3.3 Appropriate safety instructions for specific operations shall be posted and personnel instructed as to the hazards present and precautions involved.

6.5.3.4 The number of working personnel and transients permitted in each work space shall be established and posted in such areas. The numbers shall be the minimum number required to accomplish necessary operations.

6.5.3.5 All loading operations should be conducted in a neat and orderly manner.

6.5.3.6 Enforce good housekeeping and maintain effective policing, inspection and supervisory methods throughout the loading area and surroundings.

6.5.3.7 Employ effective cleaning methods periodically to minimize the accumulation of explosives or explosive dust and other contamination upon, and assure its removal from, floors, walls, ceiling, ledges, tables, benches, piping, and equipment or the items loaded. Clean up any spilled material immediately.

6.5.3.8 The exposure of explosive materials and related parts should be so controlled as to minimize the absorption of moisture from the atmosphere or other sources during loading and handling operations.

6.5.3.9 Personnel handling detonators, primers, delay elements, lead-ins, boosters, and related parts which affect functioning should, insofar as practicable, avoid using bare fingers or improper equipment, in order to prevent damage, corrosion, or deterioration from perspiration or other contaminating deposits.

6.5.3.10 Keep explosives and explosive parts in approved covered receptacles with covers in place when material is not being taken out or put into the receptacles. Where necessary, receptacles should be conductive to ground electrostatic charges. (See paragraph 6.5.4).

6.5.4 Static and electrical.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:07Z
Check the source to verify that this is the current version before use.

6.5.4.1 Protect operations from electrostatic charges by effectively grounding all machinery, equipment, and fixtures; and, where necessary, employ suitable grounded conductive coverings for floors, work benches and tables, and workers' conductive shoes. Workers' clothing of a type to minimize the accumulation of static charges shall be employed. Fabrics, such as silk and nylon, which generate static electricity shall be avoided. Additional grounding devices, such as grounded bracelets for workers, should be employed where operations are conducted with items which are unusually sensitive to initiation by static electricity. Such items include initiating explosives, tracer mixtures, and low energy type of electric primers, detonators and squibs. The latter types of items shall have the free ends of lead wires bared and twisted together and be packed in relatively small groups wrapped in bare non-insulated aluminum foil or other uncoated metal foil. During assembly and processing operations, such sensitive electric items should be short circuited by clips or other devices until installed with safety shunt in the final device. Additional precautions for these items should include mechanical shielding to contain or deflect fragments and blast; also electrical shielding from induced electric currents originated by sources such as lightning, static, electromagnetic radiations, etc. Where necessary for safety, humidity of work rooms should be appropriately increased, as required to lessen electrostatic effects, but without inducing excessive moisture absorption by any of the components of the item being processed.

6.5.4.2 Protect all explosive operations from the effects of electric current originating in equipment (such as soldering irons or guns, heaters, switches, wiring, motors, lights, test instruments, etc.) by suitable insulation, grounding, separation or shielding. Such electric sources may initiate explosives by heat, sparks, arcs, or by completing an electric circuit through an electric primer, detonator or squib. For example, circuits may be inadvertently completed from a defective electric soldering iron through a grounded contact. All electric types of primers, detonators or squibs provided with wire leads shall have the free ends of the wires bared and twisted together to short circuit each unit, except when in process of assembly into a finished item. Removable short circuiting clips or other devices should be employed during manufacturing operations involving items such as electric primers, detonators or squibs.


6.5.4.3 Where necessary, protect personnel and operations from electromagnetic energy. In certain work with very sensitive explosives or items, a shielded environment free from significant electromagnetic energy should be provided.

6.5.5 Operating facility and storage regulations.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:07Z
Check the source to verify that this is the current version before use.

6.5.5.1 All explosives including partially loaded items should be stored in suitable storage magazines located in accordance with the minimum distances prescribed in the American Table of Distances (ATD). While the explosive or loaded items are in process, stored in loading rooms, or in ready or service magazines, they should be located in accordance with Intraplant Distances set forth in the ATD. For Navy managed or contractor managed-Navy owned-explosives loading plants, the Armed Services Explosives Safety Board standards approved by the Department of Defense, the Secretary of the Navy and the Naval Air Systems Command covering quantity-distance regulations for explosives apply.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:07Z
Check the source to verify that this is the current version before use.

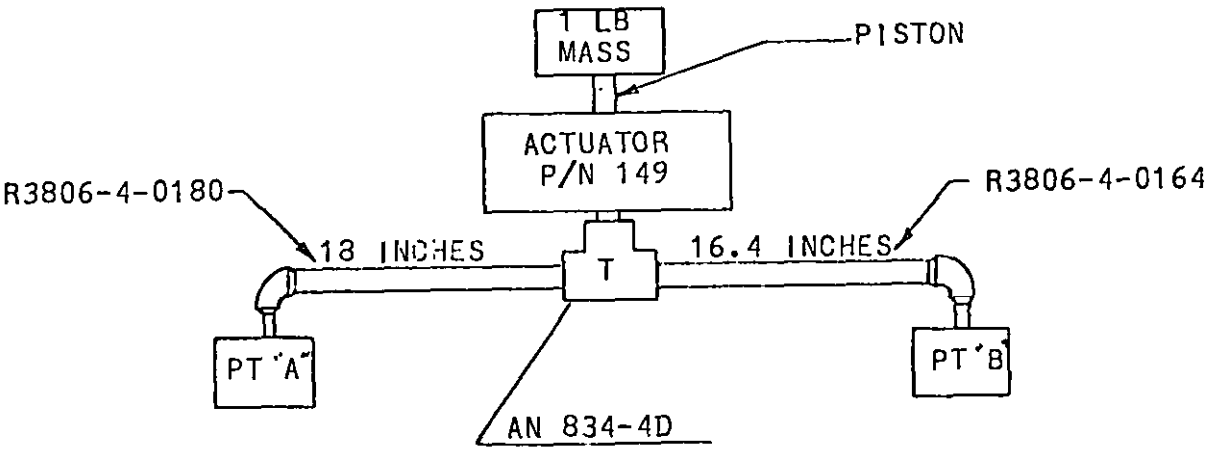

NOTE: HOSE ASSEMBLY NUMBERS ARE RESISTOFLEX CORP. PART NUMBERS

FIGURE 1

TEST SET FOR HARNESS AND BLADDER ACTUATOR
CARTRIDGE FIRINGS
(T2J)

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:07Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Systems Command
Washington, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

NAVAL AIR SYSTEMS COMMAND (AIR-52021)
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

GPO 303-224/Z 893

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:07Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

MIL-C-22845A(AS) CARTRIDGE, DELAY MARK 35 MOD 0

ORGANIZATION *(Of submitter)*	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 APR 63 1426

C-8970

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:07Z
Check the source to verify that this is the current version before use.