| INCH-POUND |

MIL-F-22839D
17 November 1988
SUPERSEDING
MIL-F-22839C
3 December 1982

MILITARY SPECIFICATION

FURNITURE, MODULAR TYPE, STEEL, FIELD OFFICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the manufacture and acceptance requirements for modular type field office furniture (see 3.1 and 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

TT-C-490 - Cleaning Methods for Ferrous Surfaces and Pretreatments for Organic Coatings.
TT-E-485 - Enamel, Semigloss Rust-Inhibiting.
MMM-A-130 - Adhesive, Contact.
PPP-B-591 - Boxes, Shipping, Fiberboard, Wood-Cleated.

|Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.|

AMSC N/A FSC 7110

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.

MILITARY

MIL-P-116 - Preservation, Methods of.
MIL-L-10547 - Liners, Case, and Sheet, Overwrap; Water-vaporproof or Waterproof, Flexible.

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Thread Standards for Federal Services.
FED-STD-595 - Colors.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-1186 - Cushioning Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.

(Unless otherwise indicated, copies of federal and military specifications and standards are available from the Naval Publications and Forms Center (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A 165 - Electrodeposited Coatings of Cadmium on Steel.
ASTM A 240 - Heat-Resisting Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels.
ASTM A 366 - Steel, Sheet, Carbon, Cold-Rolled, Commercial Quality.
ASTM A 505 - Steel, Sheet and Strip, Alloy, Hot-Rolled and Cold-Rolled, General Requirements for.
ASTM A 569 - Steel, Carbon (0.15 Maximum, Percent), Hot-Rolled Sheet and Strip Commercial Quality.
ASTM B 62 - Composition Bronze or Ounce Metal Castings.
ASTM B 86 - Zinc-Alloy Die Castings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

ASTM B 140 - Copper-Zinc-Lead (Leaded Red Brass or Hardware Bronze) Rod, Bars, and Shapes.
ASTM B 177 - Chromium Electroplating on Steel For Engineering Use.
ASTM B 633 - Electrodeposited Coatings of Zinc on Iron and Steel.
ASTM B 209 - Aluminum and Aluminum-Alloy Sheet and Plate.
ASTM D 3951 - Commercial Packaging.

(Application for copies should be addressed to the American Society of Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA LD 3 - High-Pressure Decorative Laminates.

(Application for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street N.W., Washington, DC 20037.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. A complete set of modular type, steel, field office furniture shall consist of two 2-drawer file cabinets, one intermediate desk top section, and one 2-leg folding end table (see Figure 1).

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 4.2.1 and 6.4).

3.3 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification

3.4.1 Sheet steel. Sheet steel shall be of commercial quality cold rolled stretcher or roller leveled, cold rolled oiled, or hot rolled annealed in accordance with ASTM A 366, ASTM A 505, or ASTM A 569 or equal, and shall withstand the bend test specified in 4.5.7. Cold rolled and stretcher or roller leveled steel shall be used for all surfaces throughout. Hot rolled pickled and oiled steel may be used for interior structural parts where good welding is of primary importance. Hot rolled annealed steel may be used for drawer body, back, interior drawer front, and follower block. The steel shall be bright, smooth, free from rust, scales, pits, seams, laps, foreign matter, crimps, and buckles affecting strength and appearances and shall be of uniform gage, commercial tolerance being permitted along and across the sheet. Gage numbers specified herein are the Manufacturer's Standard Gage for sheet steel with decimal equivalents.

3.4.2 Hardware.

3.4.2.1 Face hardware. The face hardware shall be satin-finished anodized aluminum in accordance with ASTM B 209; corrosion resistant steel, Type 302, 304, or 430 in accordance with ASTM A 240; or brushed chromium on steel, die-cast zinc, brass, or bronze in accordance with ASTM B 86, ASTM B 140, or ASTM B 62 as applicable.

3.4.2.2 Drawer suspension. The drawer suspension shall be full progressive type with side-arm journaled rollers or equal. Each drawer suspension shall have not less than six ball bearing rollers and two plain rollers. Rollers shall be approximately 0.25 inch thick and not less than 0.993 inch in diameter. Rollers shall be accurately turned from cold rolled steel, case hardened. Case channels, intermediate channels and drawer slides shall be not less than 14 gage (0.0747 inch) nominal thickness. Intermediate channels shall be made resistant to corrosion by cadmium, chromium, or zinc plating by the electrodeposited plating method in accordance with ASTM A 165, ASTM B 177, or ASTM B 633 as applicable. After forming to shape, the drawer suspension members shall have a hardness range between 70 to 80 on the Rockwell "B" scale or equal. Suspension shall travel easily, quietly, and smoothly with the loaded drawer.

3.4.3 High-pressure decorative laminated plastic sheets. The high-pressure decorative laminated plastic sheets for use of desk tops and table tops shall be in accordance with NEMA LD 3, GP 50, with surface finishes of satin or low texture. The color and finish of the plastic sheets shall be as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:06Z
Check the source to verify that this is the current version before use.

3.4.4 Adhesive. Adhesive for bonding decorative laminated plastic sheets to desk tops and table tops shall conform to MMM-A-130.

3.4.5 Enamel. The enamel for finishing metal parts shall conform to TT-E-485.

3.5 Construction.

3.5.1 General. The items of the modular field office furniture, except for face hardware, shall be constructed of steel as specified in 3.4.1. Each part shall be formed to provide strength and uniformity. Main assemblies shall be secured, reinforced and braced throughout; the component parts being permanently joined using the most applicable methods of welding. Face hardware, lock, drawer pull, and latch shall be made of one of the materials and finishes specified in 3.4.2.1. Metal surfaces which do not require painting or finishing as specified in 3.4.2.1 shall be cadmium or zinc plated for corrosion resistance. Unless otherwise specified herein, all dimensions shall be as shown in Figures 1 through 9.

3.5.2 Two-drawer file cabinet.

3.5.2.1 Case. The two-drawer file cabinet case shall be constructed in accordance with the design, minimum gage thicknesses, and dimensions shown on Figures 1, 2, and 3. There shall be two hinged carrying handles built into each side of the exterior case sides as shown in Figure 2. The handles shall be heavy wrought steel, hinged type, fitted into a counter-sunk steel recess, and shall be completely flush with the sides of the case. The free gripping part of the handle shall be not less than 2.75 inches long, and not less than 0.375 inch in diameter. The handles, when in a lifting position, shall be held in the horizontal position to prevent lifter's hand from rubbing the side of the case. The handles shall be of sufficient strength to permit lifting of the case with drawers fully loaded. Four keyhole slots shall be accurately located in each side of the case exterior as shown in Figures 2 and 5. The keyhole slots, anchor points for retractable steel bolts, shown in Figures 3 and 4, shall be located at two levels so that the desk top section or end table may be attached to the case either flush with the case top or located 3.0 inches below the case top for typewriter position. Lifting handle and keyhole slots shall have recessed dust-proof covers spot-welded to the inside of case sides as shown in Figures 2, 5, and 6. A channel reinforcement shall be spot-welded from front to back of case interior at flush handle level. A channel reinforcement shall be spot-welded from front to back of case interior on the centerline of the case top. Cases shall be rigidly formed, braced, reinforced, and welded. Cases shall show no warping, twisting, or distortion that will impair the easy operation of drawers or deform any of the case parts which might offset alinement of end table or desk top section; or cause other defects which might affect the durability, serviceability, or appearance of the item.

Source: https://assist.dla.mil -- Downloaded: 202640-19T14:06Z
Check the source to verify that this is the currentversion before use.

3.5.2.2 Drawers. Drawers shall be constructed in accordance with design, minimum gage thicknesses and dimensions shown in Figure 9. Drawer section shall be similar to sections shown in Figure 2. All exposed edges of drawer body shall be box formed, rolled, or beaded for maximum strength and to eliminate all rough, sharp, or hazardous edges and corners. The drawer suspension shall be as specified in 3.4.2.2. The back of the drawer shall be flush with the face of the cabinet when the drawer is fully extended, making the full depth of the drawer easily usable and accessible, or alternatively, the face of the follower block (compressor) in its most rearward position shall inset the face of the cabinet not more than 1.0 inch when the drawer is fully extended. Stops shall be provided to prevent the drawer form hitting the back of the cabinet and to deaden noise in operation. Stops shall be provided to prevent drawer from falling out when loaded and fully opened but which will permit easy removal of drawers.

3.5.2.2.1 Follower block (compressor). Each drawer shall be provided with a steel sliding follower block with a thickness of not less than 18 gage (0.0478 inch). The follower block shall be of the positive or friction locking type and shall be removable without special tools and be easily and readily adjustable for the full depth of the drawers.

3.5.2.2.2 Drawer pulls. The pulls shall be similar to the design shown in Figure 9, with all surfaces and edges ground smooth to eliminate roughness and sharp edges. Pulls shall be securely attached with screws, nuts, and lockwashers which shall be surface mounted to inside of drawer head. Handhole blank shall be not less than the minimum dimensions shown in Figure 9.

3.5.2.2.3 Drawer latch. Each drawer shall have a readily controlled automatic drawer latch strong enough to hold the loaded drawer in a closed position against a normal rebound, a tilt, or an uneven floor. The latching mechanism shall be guarded or concealed, eliminating the hazard of torn clothing or scratched hands. The drawer latch shall be conveniently located near the drawer pull.

3.5.2.3 Lock. A recessed automatic unit lock shall be provided for each cabinet. When the cabinet is locked, the face of the cylinder shall be flush with the case exterior surface or the cylinder may be inset not greater than 0.0625 inch. The locking mechanism shall be similar to one of those shown in Figure 6. It shall consist of an adequately guided, vertically moving lock-bar and cam attached to a plunger-type lock (paracentric key) in the left hand top corner of the case frame to control vertical movement of the lock-bar. When the lock is pressed in, the bar shall move into the locked position, locking both drawers. The locking mechanism shall be so constructed that the drawers left open may be closed and locked after the cabinet is locked, without distorting the locking mechanism. The paracentric key lock shall have not less than four pin-tumblers and shall have not less than 200 key changes. Two keys shall be provided with each lock. Locking mechanism shall work smoothly, easily, and quietly without binding.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

3.5.3 Intermediate desk top section. The intermediate desk top section shall be constructed in accordance with design, minimum gage thickness, and dimensions shown in Figures 1, 3, and 4. Top shall be fitted with four retractable steel bolts, located as shown in Figures 3 and 4. Bolts shall be locked in engaged or disengaged positions by a spring steel clip arrangement, as shown in Figure 4. Bolts shall be flush with or slightly recessed within outside edge of top, when in disengaged position. A channel reinforcement shall be spot-welded to underside of top as shown in Figure 3. Entire perimeter of top shall be edged with an 18 gage (0.0478 inch) metal angle. Top shall be covered by a single piece of decorative laminated plastic sheet as specified in 3.4.3, uniformly bonded to the top throughout the entire area of contact with the adhesive specified in 3.4.4. The plastic covering shall be flat, free from scratches or chipped edges, and shall be carefully fitted to closely butt perimeter angle.

3.5.4 Two-leg folding end table. The two-leg folding end table shall be constructed similar to the intermediate desk top section in every respect, except that it shall be fitted with two adjustable folding type legs and shall have only two retractable steel bolts as shown in Figure 4. The end table shall be constructed in accordance with the design, gage thicknesses, and dimensions shown in Figures 1, 7, and 8. Each leg shall have a height adjustment mechanism as shown in Figure 8 and shall be double braced as shown in Figure 7. Braces shall enable the legs to be positioned under top, out of sight, when not in use. The end table top shall be covered with a plastic sheet meeting all the requirements for the laminated plastic sheeting of the intermediate desk top section specified in 3.5.3.

3.6 Treatment and painting. All metal surfaces, except surfaces coated for corrosion resistance and face hardware, shall be painted. Application of finish coat shall produce a smooth and uniform surface without runs or embedded foreign matter, and shall be free from any other objectional defects.

3.6.1 Surface preparation. Unless otherwise specified (see 6.2), all surfaces to be painted shall be cleaned and coated in accordance with TT-C-490, using cleaning method II (solvent) or method III (hot alkaline) and coated with type I (zinc phosphate) or type II (iron phosphate) coating.

3.6.2 Finish. All surfaces to be painted shall be given a coat of semi-gloss, rust-inhibiting enamel as specified in 3.4.5. Unless otherwise specified (see 6.2), the color of the finish coat shall be olive green conforming to FED-STD-595, color number 24064. The item shall be baked for not less than 45 minutes at 250 degrees Fahrenheit (121 degrees Celsius), or for an equivalent baking period at a higher temperature as recommended by the paint manufacturer. Film thickness shall be not less than one mil. All exterior metal parts shall be given a second coat of the enamel specified above to meet all requirements of the first coat. Special attention shall be given to the bottoms and to the interiors to insure that all surfaces are adequately protected against rust.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

3.7 Identification marking. The letters "U.S.", the nomenclature, specification number, contractor's name, and the number and year of the contract shall be stamped or stenciled in a plain and legible manner on each item with waterproof ink or paint. Stamping or stenciling shall be placed on the underside of the desk top section and folding end table and on the inside side of the file cabinet drawer. Alternatively, a metal embossed plate or decalcomania transfer bearing the above information may be used for identification marking.

3.8 Workmanship. Workmanship shall be such that the product shall be free of imperfections which will affect its general appearance, function, or serviceability.

3.8.1 Steel fabrication. The steel used in fabrication shall be free from kinks, sharp bends, and other conditions which would be deleterious to the finished product. Manufacturing processes shall not reduce the strength of the steel to a value less than intended by the design. Manufacturing processes shall be done neatly and accurately. All bends shall be made by controlled means to insure uniformity of size and shape.

3.8.2 Bolted connections. Boltholes shall be accurately punched or drilled and shall have the burrs removed. Washers or lockwashers shall be provided in accordance with good commercial practice, and all bolts, nuts, and screws shall be tight.

3.8.3 Riveting connections. Rivet holes shall be accurately punched or drilled and shall have the burrs removed. Rivets shall be driven with pressure tools and shall completely fill the holes. Rivet heads, when not countersunk or flattened, shall be of approved shape and of uniform size for the same diameter of rivet and in full contact with the surface of the member.

3.8.4 Welding. Welding procedures shall be in accordance with a nationally recognized welding code. The surface of parts to be welded shall be free from rust, scale, paint, grease, or other foreign matter. Welds shall be of sufficient size and shape to develop the full strength of the parts connected by the welds. Welds shall transmit stress without permanent deformation or failure when the parts connected by the weld are subjected to proof and service loadings.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1. Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in applicable referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.2.1).
b. Quality conformance inspection (see 4.2.2).

4.2.1 First article inspection. The first article inspection shall be performed on two two-drawer file cabinets, one intermediate desk top section, and one two-leg folding end table, when a first article is required (see 3.2 and 6.2). This inspection shall include the examination of 4.4, the tests of 4.5, and the packaging inspection of 4.6. The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.2 Quality conformance inspection. The quality conformance inspection shall include the examination 4.4, the tests of 4.5, and the packaging inspection of 4.6. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one complete set of modular furniture, consisting of two two-drawer file cabinets, one intermediate desk top section, and one two-leg folding end table. All complete sets of modular furniture offered for delivery at one time shall be considered a lot for the purpose of inspection. If an inspection lot is rejected, the contractor may

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:06Z
Check the source to verify that this is the current version before use.

rework it to correct the defects, or screen out the defective units, and resubmit for a complete reinspection. Resubmitted lots shall be reinspected using tightened inspection. If the rejected lot was screened, reinspection shall be limited to the defect causing rejection. If the lot was reprocessed, reinspection shall be performed for all defects. Rejected lots shall be separate from new lots, and shall be clearly identified as reinspected lots.

4.3.1 Sampling for examination. Examination shall be based on inspection level II and an acceptable Quality Level (AQL) of 2.5 percent defective.

4.3.2 Sampling for tests. Tests shall be based on inspection level II and an AQL of 2.5 percent defective.

4.4 Examination. Each sample shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the manufacturer's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. Defects shall be classified in accordance with table I. Each attribute within each classification of multiple defects shall constitute one defect.

TABLE I. Classification of defects.

Classification	Defect	Requirement paragraph
Major		
101	Design not as specified.	3.1, 3.5, and Figures 1 through 9
102	Dimensions not as specified.	Figures 1 through 9
103	Poor fit of component parts.	3.3
104	Steel not as specified.	3.4.1
105	Face hardware not as specified.	3.4.2.1
106	Drawer suspension not as specified.	3.4.2.2
107	Decorative laminate plastic not as specified.	3.4.3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects - Continued.

Classification	Defect	Requirement paragraph
Major (Continued)		
108	Adhesive not of the type specified.	3.4.4
109	Carrying handles not as specified.	3.5.2.1
110	Carrying handles and keyhole slots not provided with recessed dust covers.	3.5.2.1
111	Case interior not reinforced with channels as specified.	3.5.2.1
112	Drawer body edges not boxed framed, rolled, or beaded to eliminate rough, sharp, or hazardous edges and corners.	3.5.2.2
113	Drawer stops not as specified.	3.5.2.2
114	Follower block (compressor) not as specified.	3.5.2.2.1
115	Drawer pulls not as specified.	3.5.2.2.2
116	Drawer latch not as specified.	3.5.2.2.3
117	Drawer lock either not flush or is recessed greater than specified.	3.5.2.3 and Figure 6
118	Drawer lock does not lock both drawers.	3.5.2.3
119	Intermediate desk top section not edged with an 18 gage (0.0478 inch) angle.	3.5.3
120	Laminated plastic to surfaces not uniformly bonded to the top of desk top section or folding end table.	3.5.3 and 3.5.4

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:06Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects - Continued.

Classification	Defect	Requirement paragraph
Major (Continued)		
121	Laminated plastic top surfaces not flat, free from scratches or chipped edges.	3.5.3 and 3.5.4
122	Two-leg folding end table not constructed as specified.	3.5.4
123	Surface preparation not as specified.	3.6.1
Minor		
201	Decorative laminated plastic sheets not of the color specified.	3.4.3
202	Drawer lock not provided with two keys.	3.5.3
203	Painted surfaces not smooth, runs, or foreign material.	3.6
204	Color of finish coat not as specified.	3.6.2
205	Marking missing, illegible or incorrect.	3.7

4.5 Tests. The first article shall receive the tests of 4.5.1 through 4.5.8. Each production sample, selected in accordance with 4.3, shall receive the test of 4.5.1.

4.5.1 Assembly test. The intermediate desk top section shall be assembled between two two-drawer file cabinets and shall be checked for ease of assembly and accuracy of fit of the bolts in desk top and key holes in cabinet. The two-leg folding top section shall be attached to the file cabinet and given the same test and inspection as the intermediate desk top section. Tolerances of all units shall be sufficiently close to permit assembly without use of tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

4.5.2 Load test. A weight of not less than 300 pounds shall be placed on the intermediate desk top and also on the two-leg folding table, on an area not greater than 12.0 inches in diameter for not less than 5.0 minutes. The weight shall be first placed at the front center of the knee-space, then at the back center of the knee space. The desk top and the table top shall not deflect greater than 0.125 inch, when measured 1.0 inch towards the center from the front edge and 1.0 in towards the center from the back edge, and shall not take on any permanent set. The bolts in desk top and table top shall work freely and have no visible defects. The key holes in the file cabinets shall show no visible defects. In addition, the leg mechanism on the two-leg folding table shall be inspected for defects. Any defect will cause rejection of the unit on which the defect is noted.

4.5.3 Rack test. The file cabinet shall be examined and tested to determine the impairment, if any, of the ease of operation of drawers, locks, locking mechanism, latches, or other movable devices under conditions of loaded level uniform support and after uneven support. Each drawer of the cabinet shall be loaded with weights of typical filing material, including guide cards and folders as specified in 4.5.4, or their equal weight evenly distributed. Examination, observation, and drawer pull tests shall be made (see 4.5.4). The cabinet shall then be raised not less than 1.0 inch and supported not greater than 6.0 inches in on two diagonally opposite corners and allowed to remain in this position for not less than 24.0 hours. Return cabinet to a level position and re-examine it for failures or defects, and conduct drawer pull test which shall not be greater than that specified in 4.5.4.

4.5.4 Service test. The file cabinet shall be bolted or otherwise secured in a level position and connected to a test machine which will operate the drawer selected for test on its suspension. There shall be a means for adjusting the length of its stroke so that the drawer will travel the full distance beginning 0.50 inch from back to 0.25 inch from the front stop and a method to drive the drawer at a rate not greater than 21 cycles per minute, but shall not in any way contribute to the support of the drawer. The suspension shall be cleaned and lubricated at the end of 10,000 cycles and shall have no further attention until the test is completed. Each drawer to be tested shall be loaded with paper, standard guide cards and folders equally distributed from front to back in the total amount of 70.0 pounds. At the beginning of the test, at each increment of 10,000 cycles, a test shall be conducted to determine the force required to start the loaded drawer forward and to move it to its full outward limit. This part of the test shall be conducted by attaching a limp cord to the center of the drawer pull, over a sheave, with weight applied to its free end. The drawer suspension shall be considered as having failed the service test if the drawer operating force is greater than 3.75 pounds to complete the forward stroke before or at 50,000 cycles. The 50,000 cycles shall be performed at 8.0 hours a day for five consecutive days. Should failure be perceptible during the increments of 10,000 cycles, the apparatus shall be stopped and load test conducted at that point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

4.5.5 Moving test. The moving test shall be conducted with all drawers of the cabinet loaded to capacity as specified in 4.5.4, and the compressors drawn up tight. The cabinet shall be tipped over on its back on a furniture moving dolly, and shall remain in that position for not less than 3.0 hours, then set upright. The cabinet shall then be examined for damage to the cabinet, the drawers, latches, compressors, drawer suspensions, locks, and for any displacement or damage to the filing contents.

4.5.6 Follower block (compressor) test. The cabinet shall be tested to determine the ability of the follower block (compressor) to remain in position and to withstand damage in use. The cabinet drawer shall be loaded to not less than 47.0 pounds of the filing material, as specified in 4.5.4, held against the front of the drawer by the follower block (compressor). The location of the follower block (compressor) shall be marked on the drawer. The testing apparatus specified in 4.5.4, or its equal, shall be set in motion and make to operate 500 cycles. Upon completion, the position of the follower block (compressor) shall be indicated by a similar mark. The rearward movement of the follower block (compressor), as a result of this test, shall not be greater than 0.50 inch as indicated by the distance between the two marks.

4.5.7 Bend test for steel sheets. The steel sheets used for parts to be formed shall withstand a bend of 180 degrees at room temperature with and across the grain, without showing any crystallization, crack, or fractures on the outside of the bend. A slight granulation of the surface at the point of greatest deformation in the bend shall not be cause of rejection.

4.5.8 Finish adhesion test. A panel, prepared as specified in 3.6.2, shall be bent at room temperature around a 0.25 inch rod to 180 degrees without evidence of cracking, flaking, or loss of adhesion of the enamel.

4.6 Packaging inspection. The preservation, packing, and marking of the item shall be inspected to verify conformance to the requirements of section 5.

5. PACKAGING

5.1 Preservation. The preservation shall be level A or commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Furniture. Furniture shall be free of dirt and contamination that would contribute to, or would cause, deterioration. Cushioning or wrapping material shall be provided for all items susceptible to damage by shock and vibration during shipment and handling.

5.1.2 Commercial. The furniture shall be preserved in accordance with ASTM D 3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A. Furniture items shall be packed in boxes conforming to PPP-B-601, overseas type; or PPP-B-621, class 2. The boxes shall be provided with waterproof case liners conforming to MIL-L-10547 and sealed in accordance with the appendix thereto. Contents shall be blocked and braced in accordance with MIL-STD-1186. The boxes shall be closed and strapped in accordance with the applicable box specification. Assembly instructions shall be secured inside of cabinet drawer.

5.2.2 Level B. Furniture shall be packed as specified in 5.2.1 with the following exceptions:

a. Shipping containers shall conform to either PPP-B-601, domestic type; PPP-B-621, class 1; PPP-B-591, domestic; or PPP-B-640, class 1.

b. Case liners are not required.

5.2.3 Commercial. Furniture shall be packed as specified in ASTM D 3951.

5.3 Marking. Marking shall be in accordance with MIL-STD-129. Container markings shall include the fragile item and arrow handling markings.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The modular steel field office furniture set covered by this specification is intended for use as rough duty as field offices, particularly overseas, and in advanced areas. They are intended to be quickly arranged in suitable groups for a variety of purposes, be quickly separated and easily carried to new locations, and occupy a minimum cubic space when shipped.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When first article sample and inspection is required (see 3.2 and 4.2.1).
d. Color and finish of laminated plastic sheets (see 3.4.3).
e. Surface preparation, if other than as specified (see 3.6.1).
f. Color of finish coat, if other than as specified (see 3.6.2).
g. Level of preservation and level of packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Description (DID) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/provided and that the DID is tailored to reflect the requirements of the specific acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
None	DI-M-24035	Publication, assembly Instruction	---

The above DID was that cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DID's are cited on the DD Form 1423.

6.3.1 Assembly instructions. The manufacturer should provide not less than one illustration or not less than one set of written instructions clearly describing the method of assembling individual units into groups. Illustrations or instructions should be prepared and placed in each shipping container or carton (see 6.3). The instructions should be prepared on white paper sheet 8.50 inches wide by 11.0 inches long.

6.4 First article. When a first article inspection is required, the item should be a first article sample or it may be a standard production item from the contractor's current inventory as specified in 4.2.1. The first article should consist of one complete set of modular furniture. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Subject term (key word) listing.

File cabinet
Folding table
Intermediate desk top

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

6.6 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - GL
Navy - YD
Air Force - 99

Review activity:
Air Force - 84

User activity:
Navy - OS

Civil Agencies Coordinating Activity:
GSA - FCNE

Preparing activity:
Navy - YD

(Project 7110-0141)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

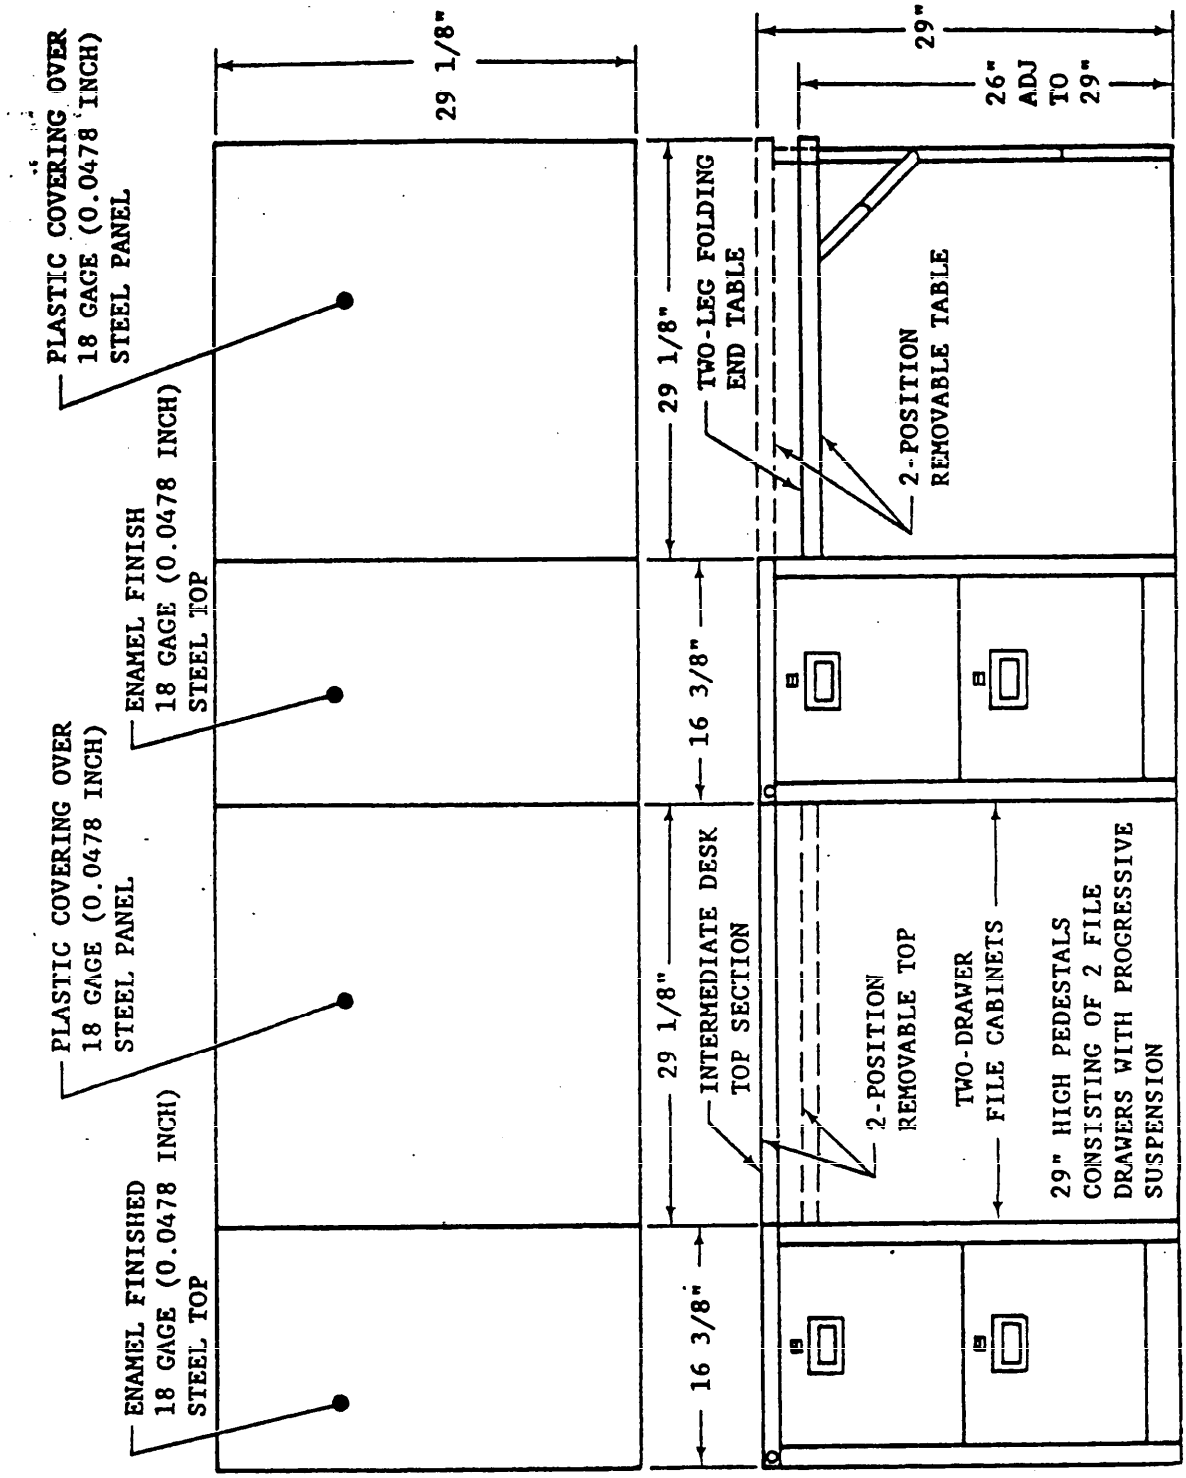


FIGURE 1. Assembly of modular units.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:06Z
Check the source to verify that this is the current version before use.

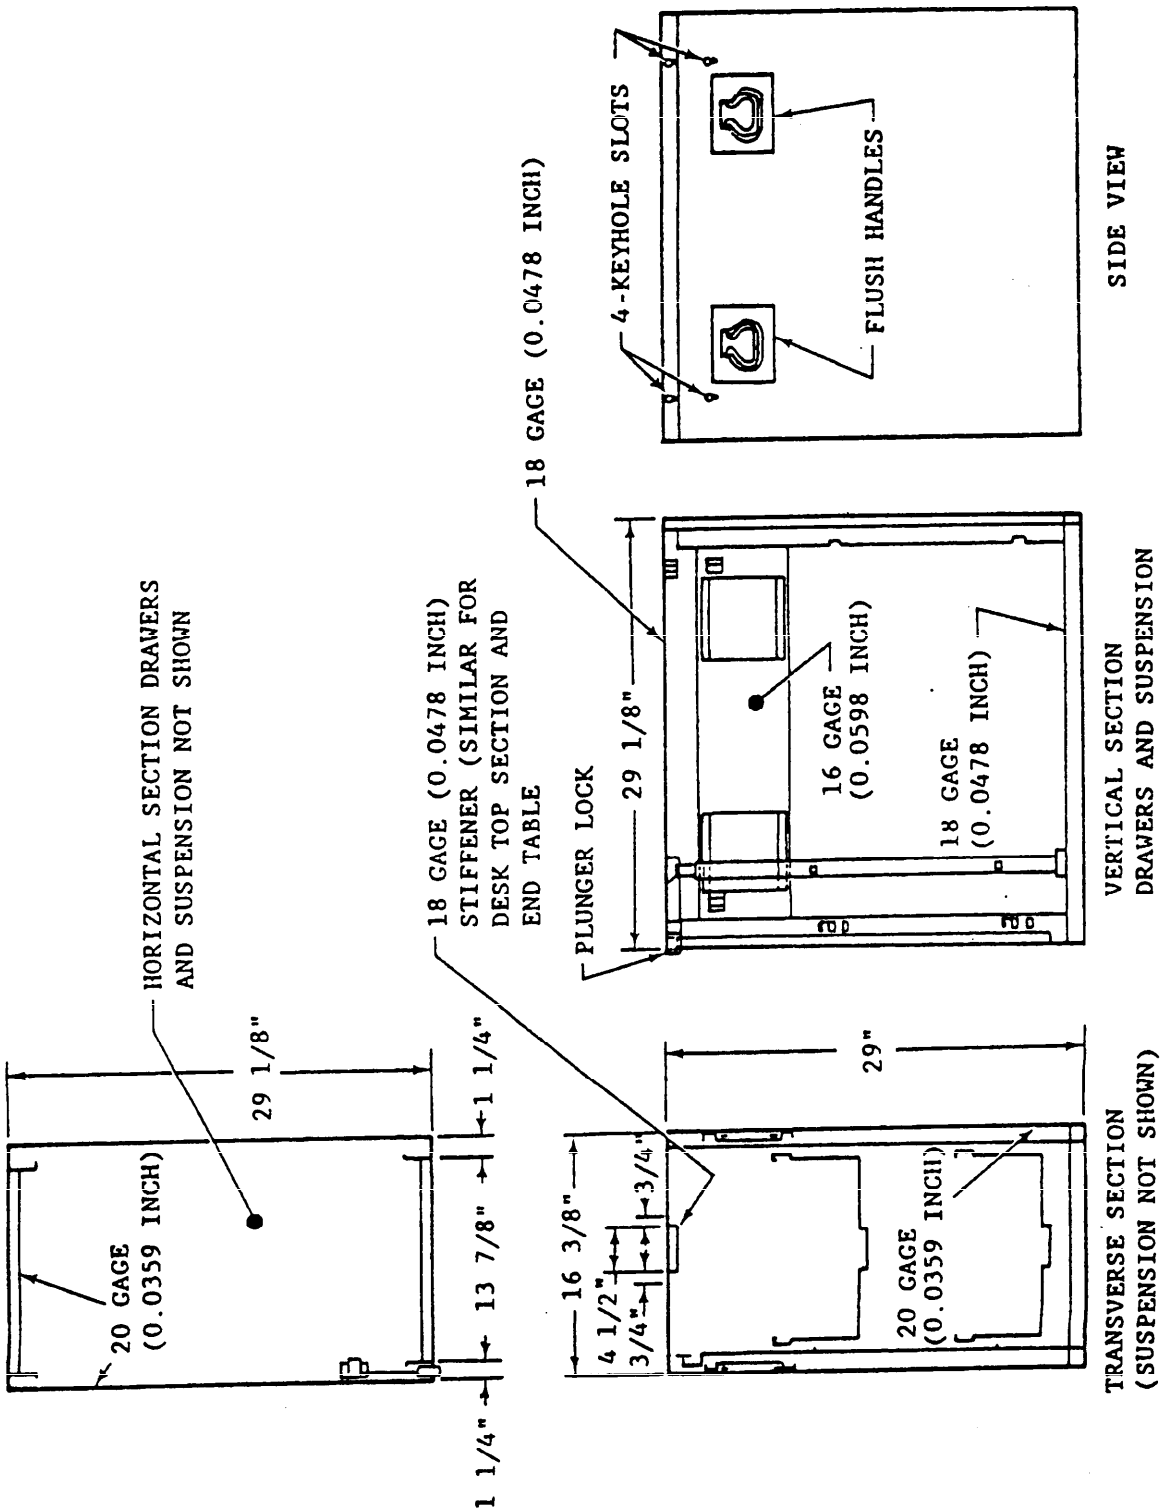


FIGURE 2. Two-drawer file cabinet.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:06Z
Check the source to verify that this is the current version before use.

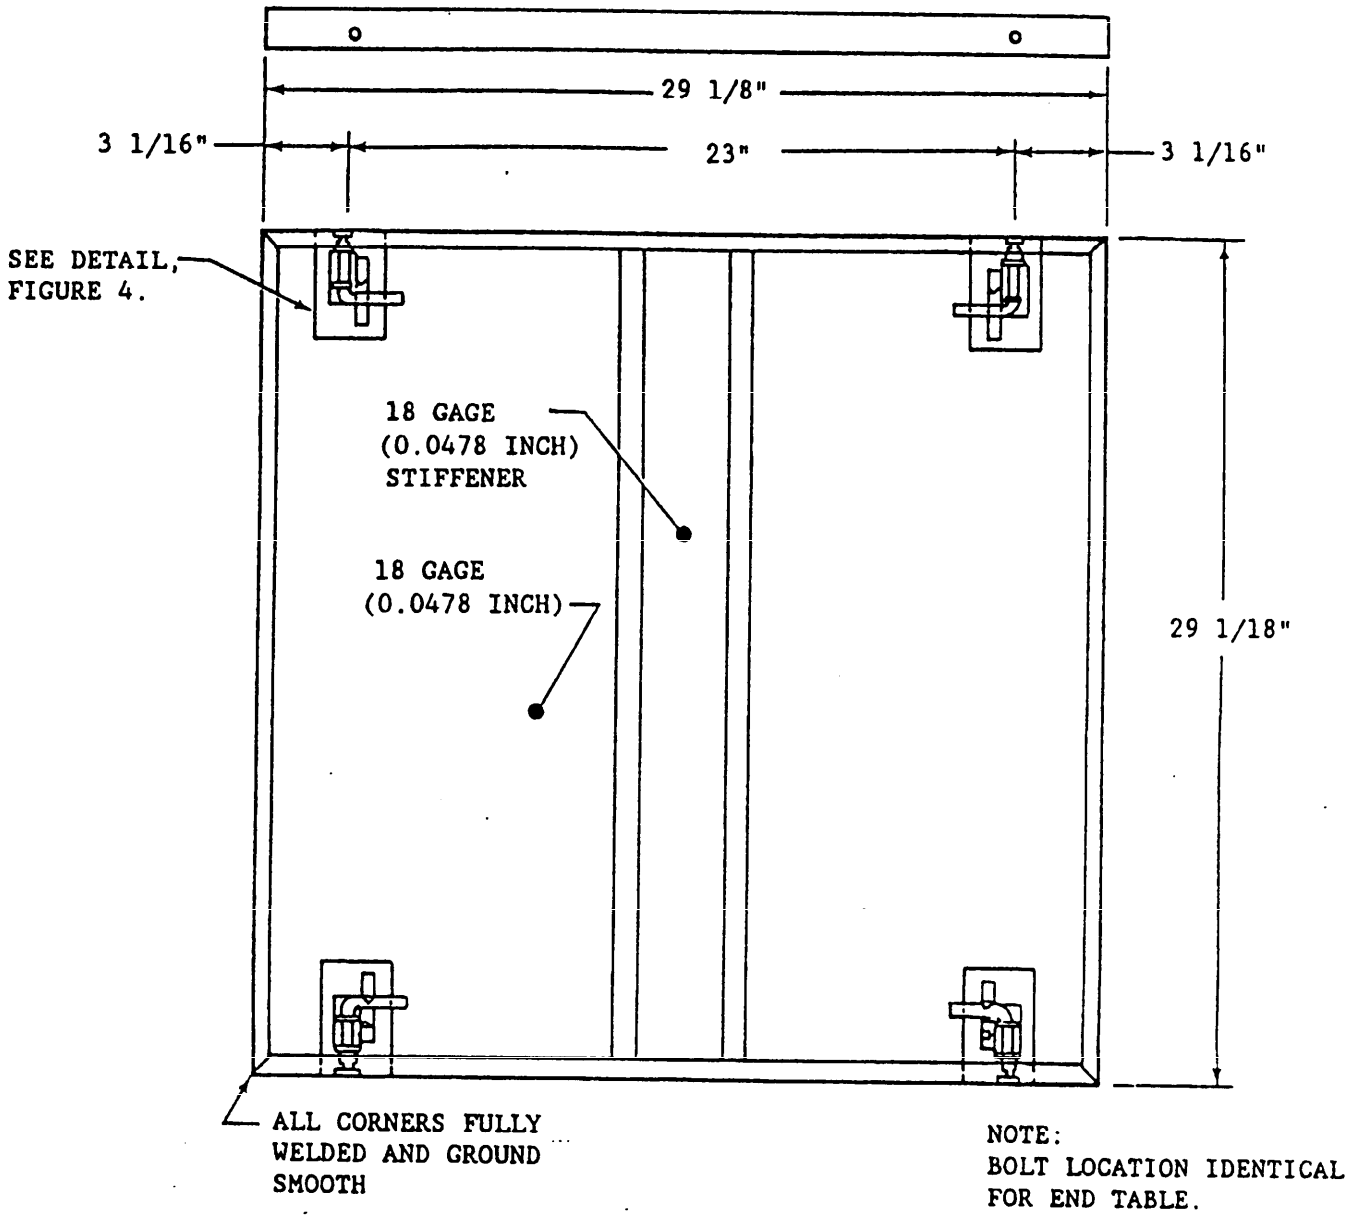


FIGURE 3. Intermediate desk top section.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

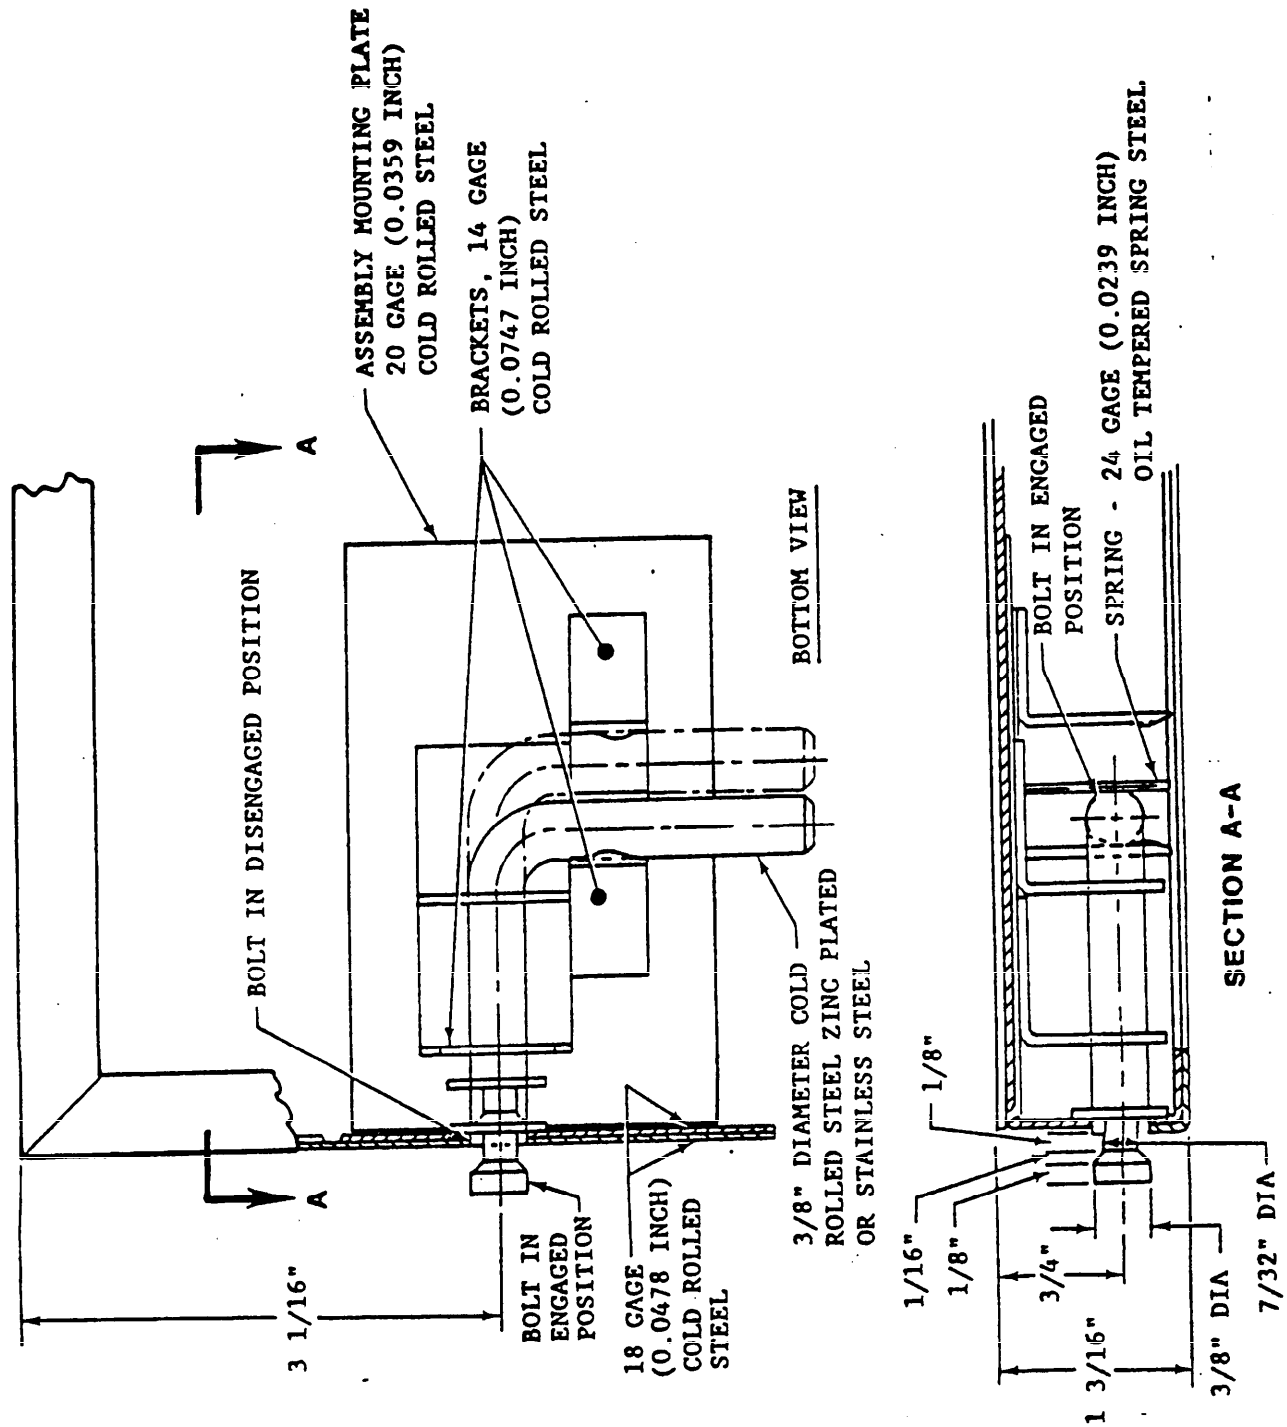


FIGURE 4. Retractable steel bolt (for securing desk and end table to filing cabinet).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

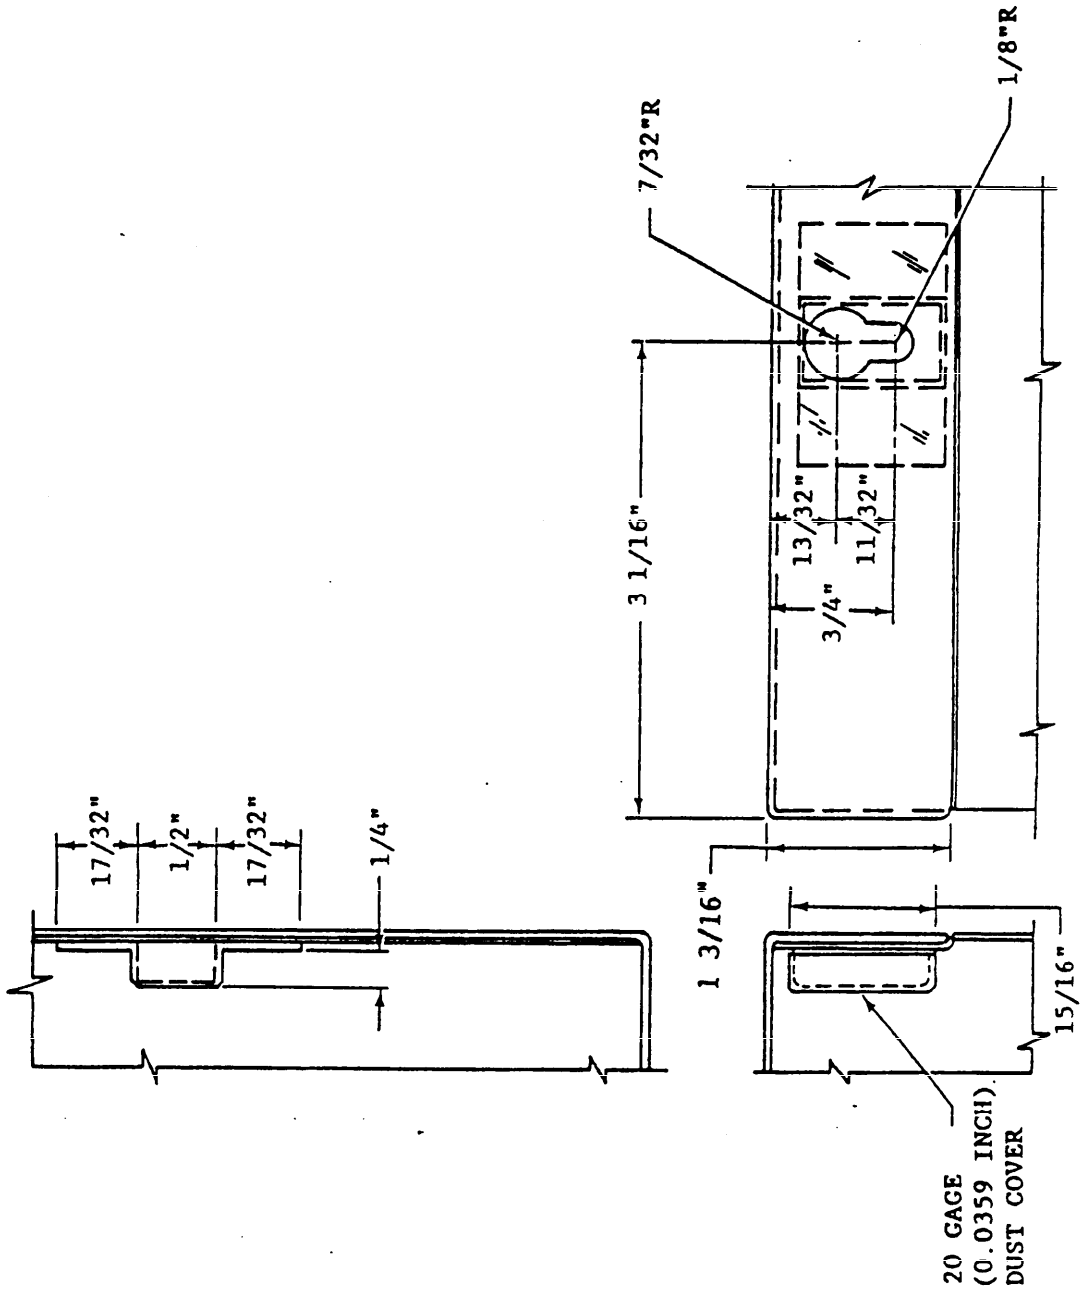


FIGURE 5. File cabinet (keyhole slot and dust cover).

Source: https://assist.dla.mil -- Downloaded: 20261O-19T14:06Z
Check the source to verify that this is the current version before use.

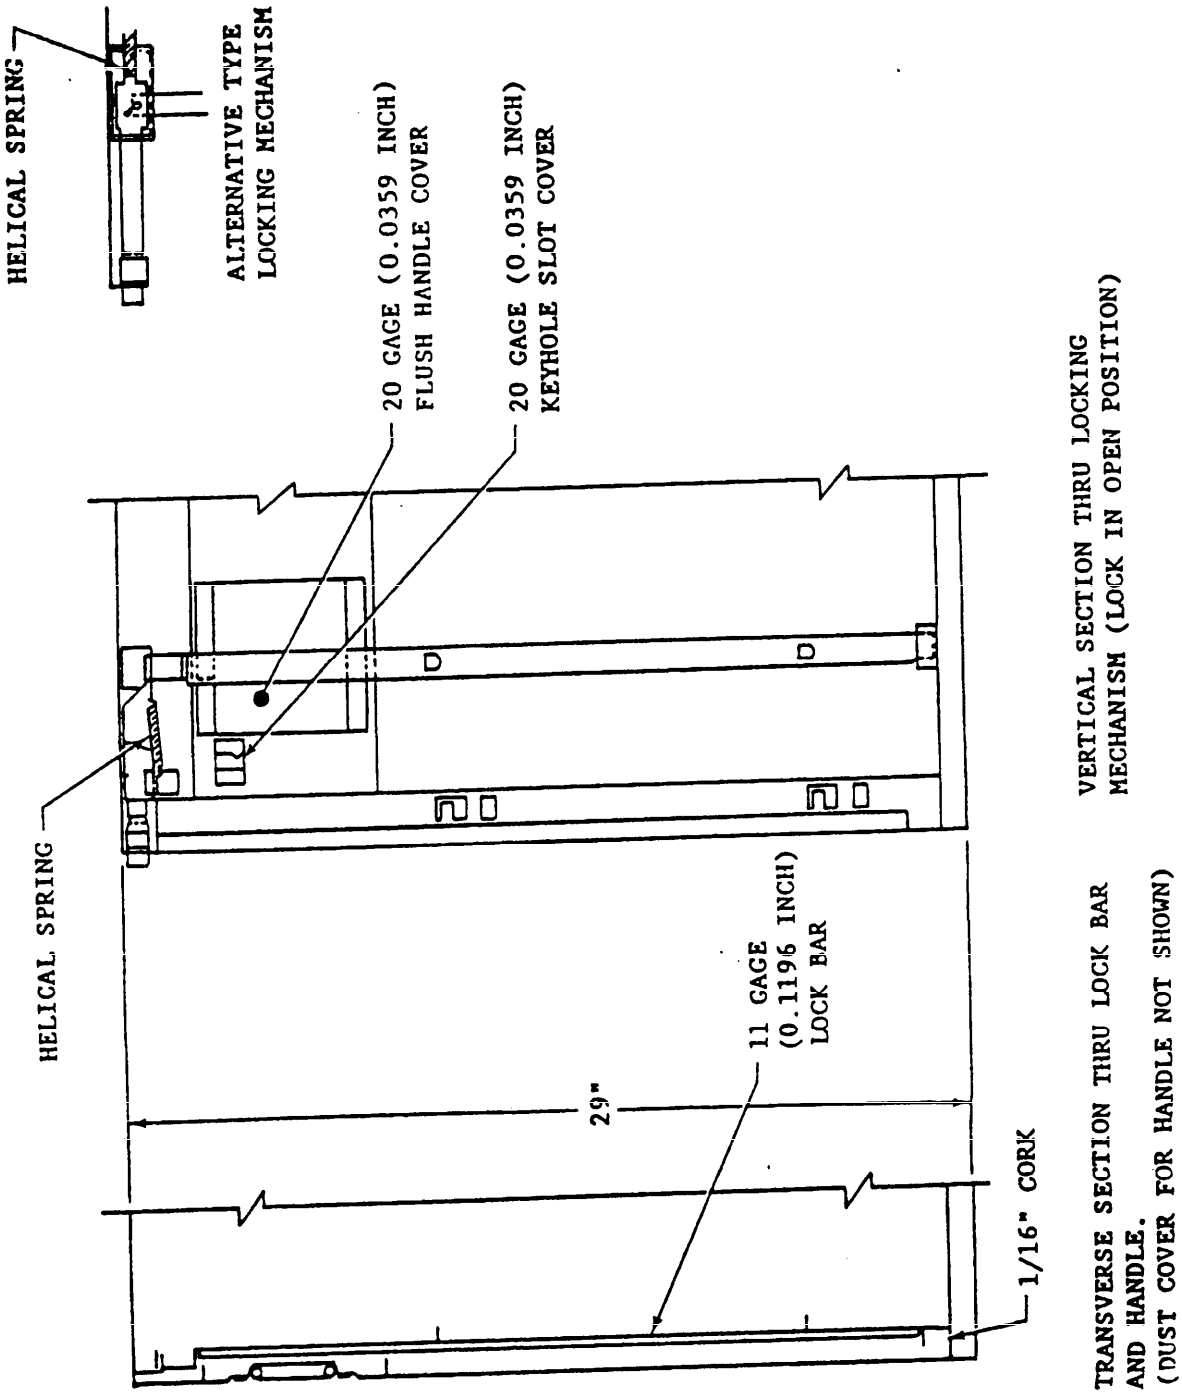


FIGURE 6. File cabinet (locking mechanism).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

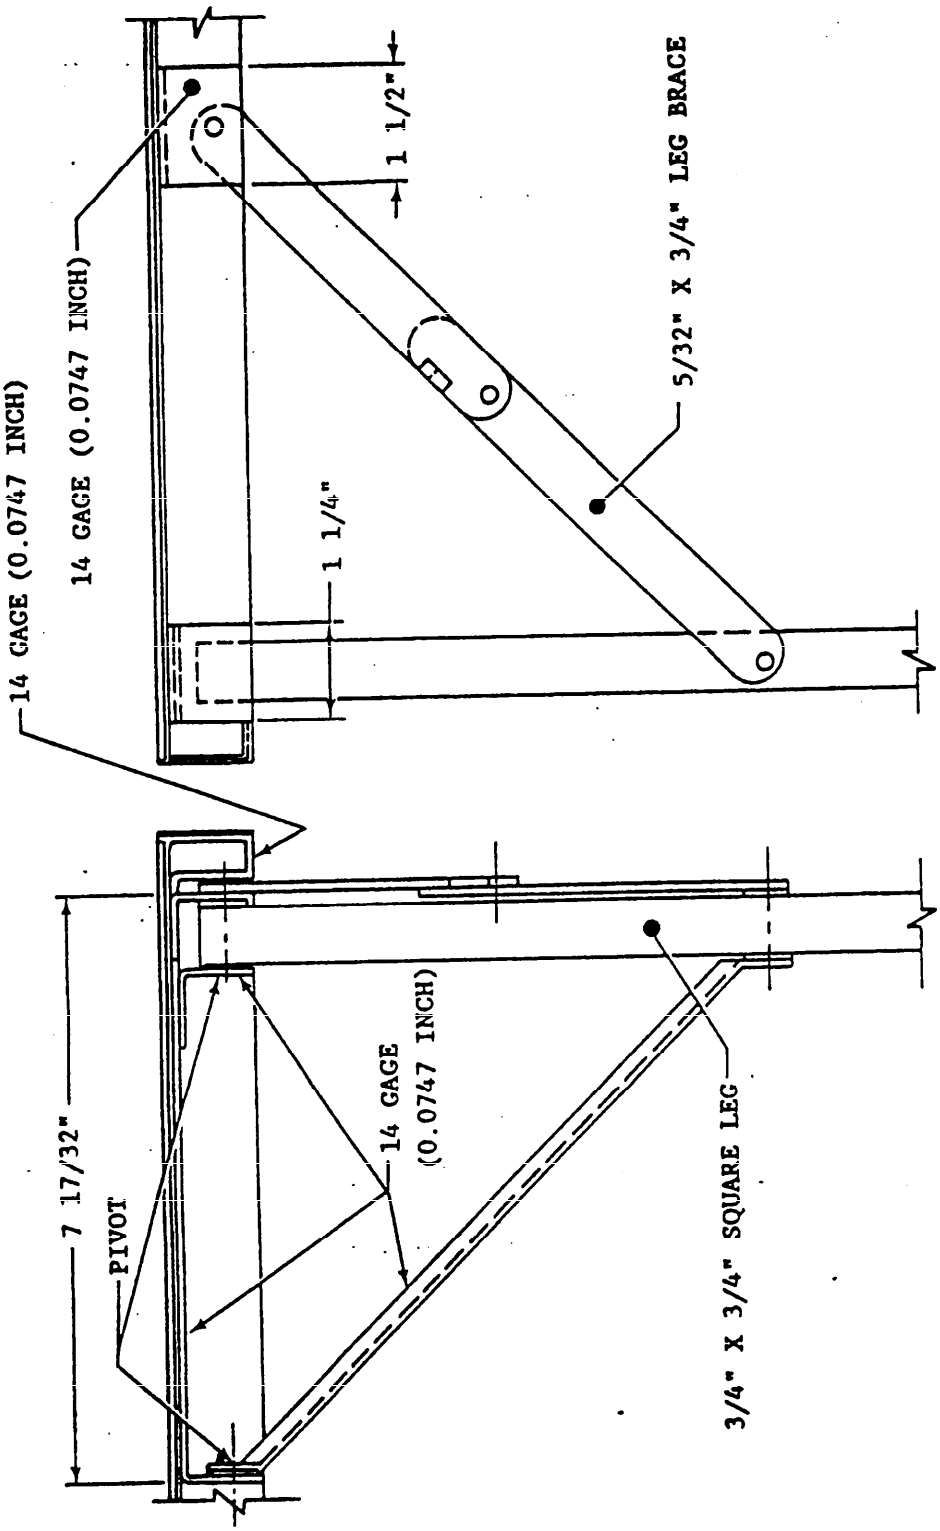


FIGURE 7. End table (folding leg braces).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

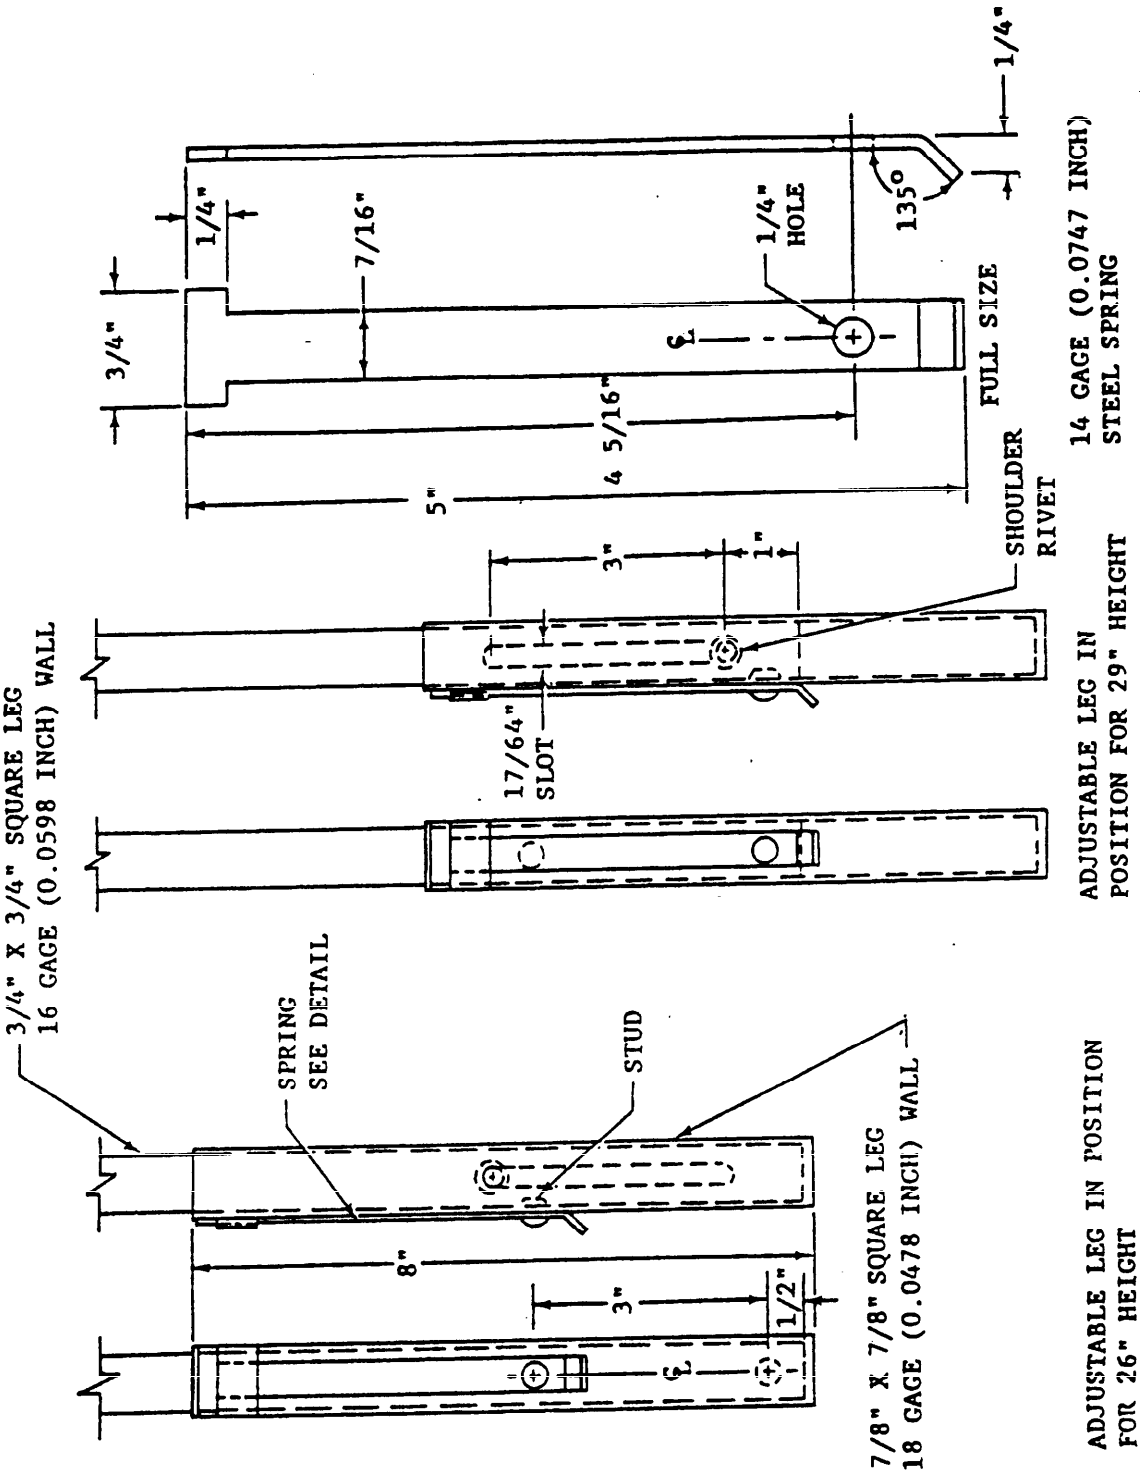


FIGURE 8. End table (height adjustment mechanism).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

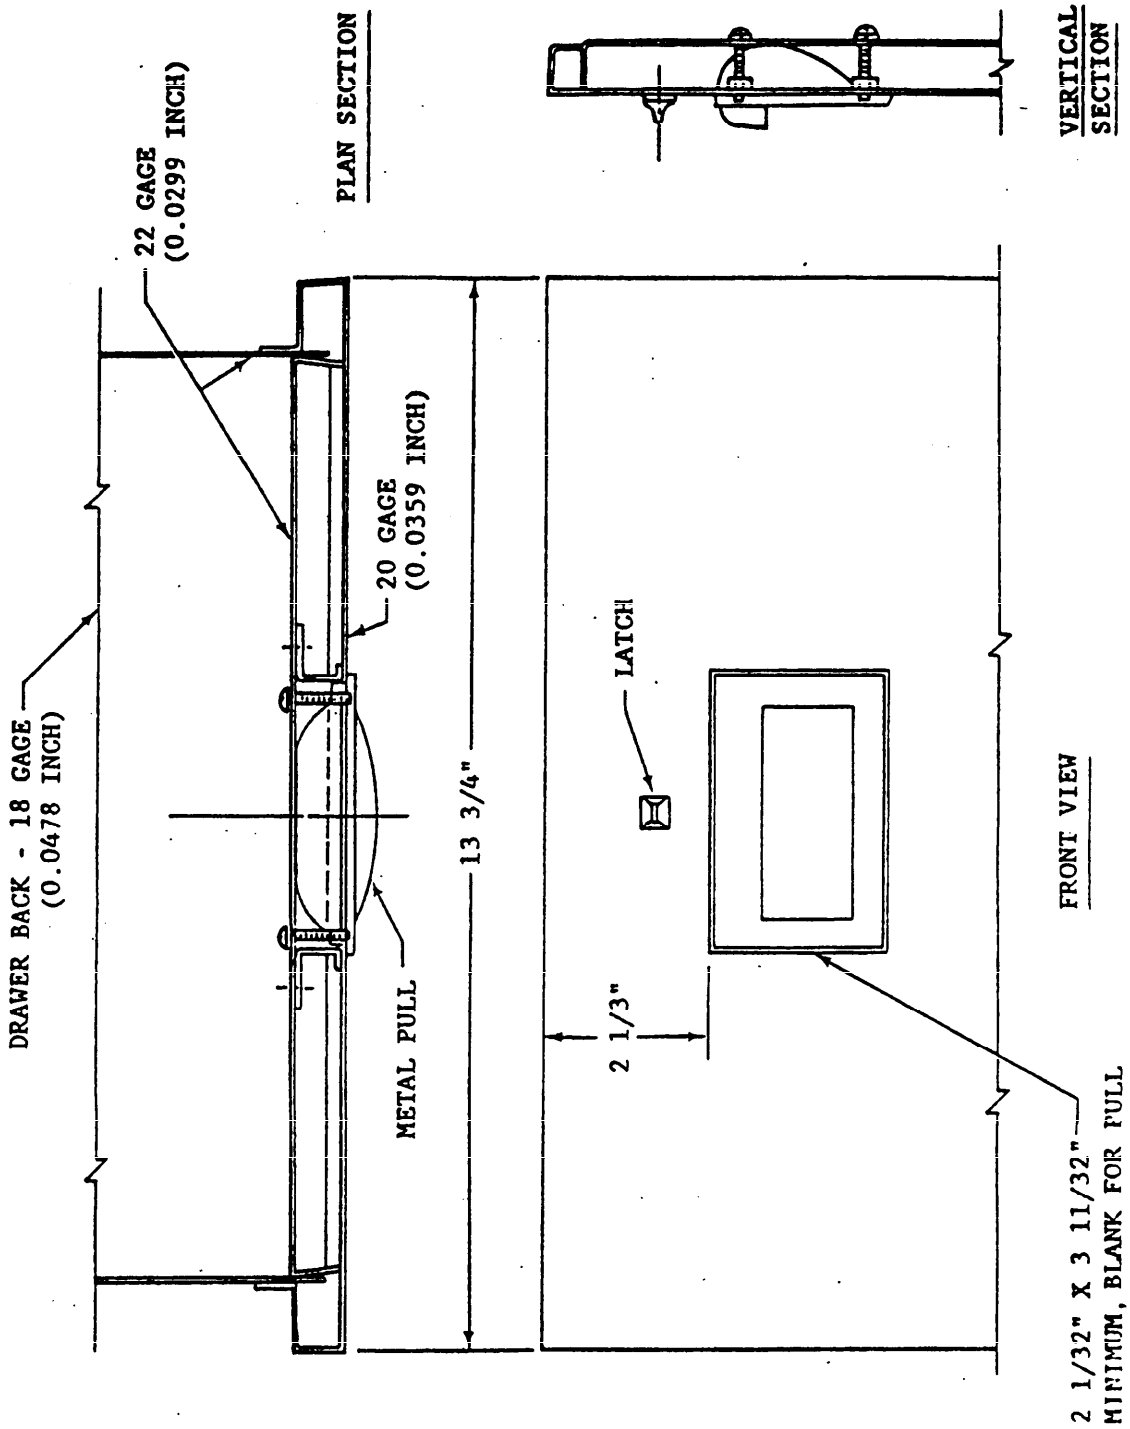


FIGURE 9. File cabinet (drawer details).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-F-22839D	MILITARY SPECIFICATION - FURNITURE, MODULAR TYI STEEL, FIELD OFFICE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*:

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include A Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FO CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:06Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Commanding Officer (Code 156)
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Code 156
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:06Z
Check the source to verify that this is the current version before use.