MILITARY SPECIFICATION

INSIGNIA, SLEEVE, SHIELD, PRINTED

1. SCOPE

1.1 Scope.- This specification covers requirements for a sleeve insignia consisting of the Coast Guard shield design printed on chambray material and coated with an adhesive for iron-on application.

2. APPLICABLE DOCUMENTS

2.1 The following Federal specification, of the issue in effect on date of invitation for bids, forms a part of this specification to the extent specified herein:

CCC-C-231 Cloth, Cotton, Chambray

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

The Color Association of the United States, Inc.

The Standard Color Card of America

(Application for copies of the color card should be addressed to the Color Association of the United States, Inc., 200 Madison Avenue, New York 16, New York.)

3. REQUIREMENTS

3.1 Preproduction sample.- Unless otherwise specified (see 6.2), the contractor shall submit to the contracting officer for approval a sample insignia of the type he intends to furnish under the specification.

3.2 Material

3.2.1 Chambray.- The cloth shall be cotton chambray conforming to Specification CCC-C-231, Type II, class 1, style B, blue warp, except that the seam efficiency tests shall be deleted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:10Z
Check the source to verify that this is the current version before use.

3.2.2 Coating compound.- The compound used for coating shall be a clear polymerized or copolymerized vinyl resin properly plasticized. Plasticizers which are known hosts to bacteria or fungi shall not be used. The compound used shall be non-toxic, non-irritant, and free from objectionable odor. It shall not contain any impurities which would cause discoloration to the printed face of the insignia.

3.2.3 Printing.- The printed design shall be uniform and distinctly defined. The color of the ink for printing the shield shall be dark blue, cable No. 70078 of the Standard Color Card of America.

3.3 Design.- The design of the insignia shall be as shown in Figure 1. (For the purpose of clarification of details, Figure 1 is shown in a size approximately four times that of the size insignia to be furnished on this specification.) Dimensions shall be as indicated in Figure 1. The stars in the chief of the shield shall be identical in size and shape, and evenly spaced on straight horizontal lines. All stripes, printed and simulated, in the base of the shield shall be of equal width. The printed portions of the shield shall comprise the outline of the shield, the background of the stars and 6 vertical stripes. The stars and remaining 7 vertical stripes shall be simulated by the chambray material. Dimensional tolerances shall be 1/16-inch for cloth measurements and 1/32-inch for the shield measurements. The outline arcs of the shield shall be true curves (see 4.5).

3.4 Adhesion.- Insignias shall be capable of adhering completely and permanently to cotton chambray cloth when pressed with a 3-pound dry hand iron preheated to 350 degrees Fahrenheit, or the indicator placed on "cotton" for a minimum of 20 seconds.

3.5 Laundering.- Insignias shall be color fast and capable of withstanding repeated launderings in wash water containing a bleaching agent without appreciable loss of color or adhesion.

3.6 Workmanship.- The quality of manufacture shall be controlled to guarantee conformity with the highest standard of workmanship.

4. QUALITY ASSURANCE PROVISIONS

4.1 The contractor shall certify that the insignias presented to the Government for acceptance meet or exceed the inspection and test requirements of this specification. The Government reserves the right to inspect and test the insignias when deemed necessary to assure the insignias conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:10Z
Check the source to verify that this is the current version before use.

4.2 Lot.- Unless otherwise specified a lot shall be considered as being the quantity of insignias on order.

4.3 Inspection.- The number of samples selected for inspection shall be at the discretion of the Government inspector. Samples shall be selected at random and inspected to ensure correct design, dimensions, cut, color, and printing requirements of the specification. The curvature of the main arc of the shield shall be checked by using reference points for the compass located 3/32 inch outside the shield on the line representing the widest portion of the shield. Defective insignias totaling over five percent of the number of samples selected shall constitute sufficient reason for rejection of the lot.

4.4 Test specimens.- Test specimens shall consist of insignias properly pressed to a piece of cotton chambray cloth with a 3 pound dry hand iron preheated to 350 degrees Fahrenheit, or with the indicator placed at "cotton" for a minimum of 20 seconds. There shall be five such specimens to be used for the washfastness test, one of which shall be used for the color transfer test. A piece of heavy paper or cloth may be placed between the iron and the specimen when pressing.

4.5 Tests

4.5.1 Washfastness.- Insignia test specimens shall be laundered in wash water of temperature of 160 degrees Fahrenheit containing a suitable amount of soap and chlorine bleach. The washing, rinsing, and damp dry cycle shall not be less than 45 minutes. After laundering, the specimens shall be examined for loss of color, bleeding of dye onto other parts of the insignia, and bonding. There shall be no change in color, no bleeding or separation of the insignia from the chambray material.

4.5.2 Color transfer.- After the washfastness test and while still in the damp dry state, a specimen shall be covered with a swatch of white size-free cotton cloth. A preheated electric hand iron of 300 degrees Fahrenheit shall be placed on the swatch assembly and with the current turned off allowed to remain for two minutes. The swatch shall then be examined for color transfer. If the swatch shows stains the lot shall be rejected.

5. PREPARATION FOR DELIVERY

5.1 Packaging

5.1.1 Unit packaging and marking.- Each insignia shall be placed in a 2 by 2 inches flat style transparent unwaxed envelope. Each envelope shall be either printed or stamped, or shall contain a paper label with sufficient instruction for proper application of the insignia.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:10Z
Check the source to verify that this is the current version before use.

5.2 Packaging and packing.- Insignias shall be packaged 100 to each box and packed in accordance with the supplier's normal practice.

5.2.1 Marking.- All boxes shall be marked with the item name, manufacturer's name, contract number, Federal stock number, and quantity contained.

6. NOTES

6.1 Intended use.- The insignia covered by this specification are for use on chambray shirts worn by enlisted men of the U. S. Coast Guard.

6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) When a preproduction sample is not required (see 3.1).

(c) Federal stock number.

NOTICE.- When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Preparing activity:
U. S. Coast Guard

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:10Z
Check the source to verify that this is the current version before use.

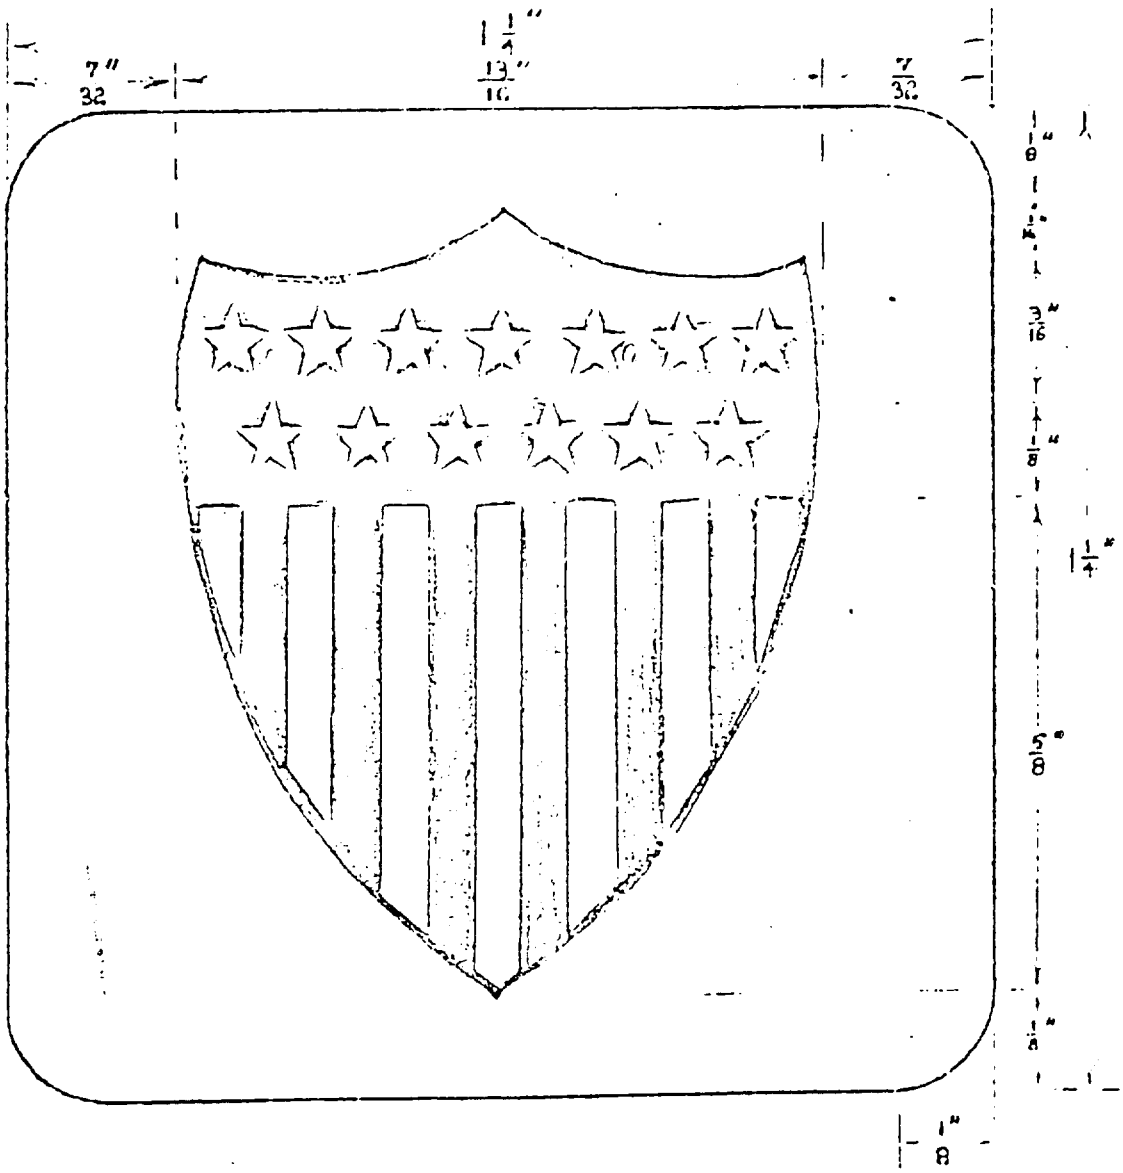


FIGURE 1
(FOUR TIMES ACTUAL SIZE)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:10Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:10Z
Check the source to verify that this is the current version before use.