
MILITARY SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED LENSES

(SCREW-IN, T-1-3/4 MFB LAMP)

This specification is approved for use by all Departments and Agencies of the Department of Defense

The complete requirements for procuring the lenses described herein shall consist of this document and the latest issue of Specification MIL-S-22885

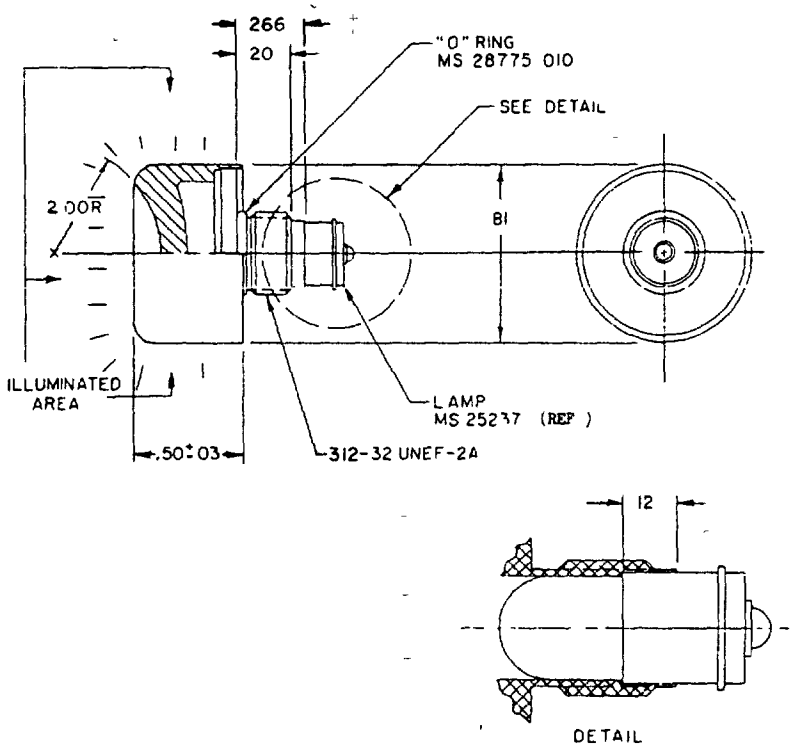


Configuration A

FIGURE 1 Lenses


Ⓖ denotes changes.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

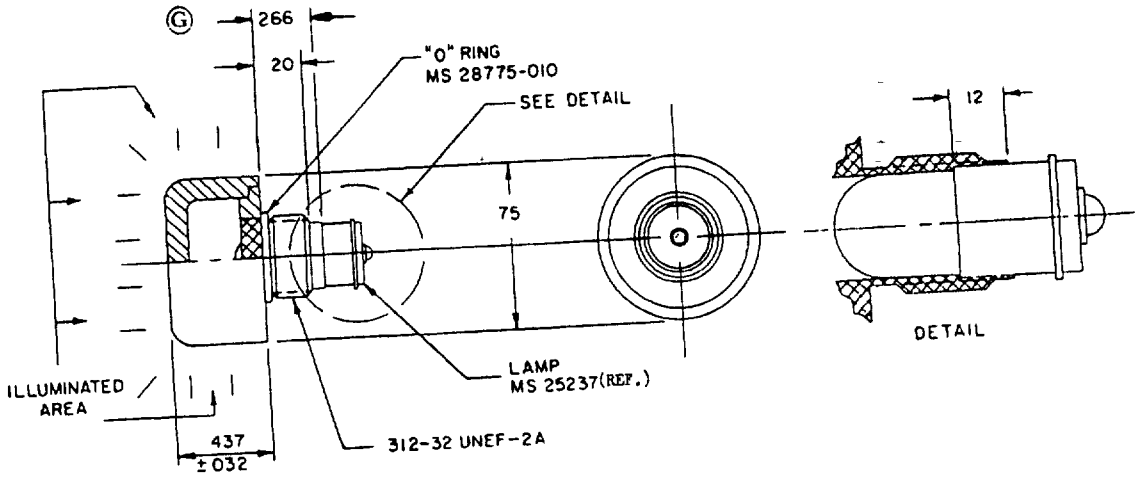


Configuration B

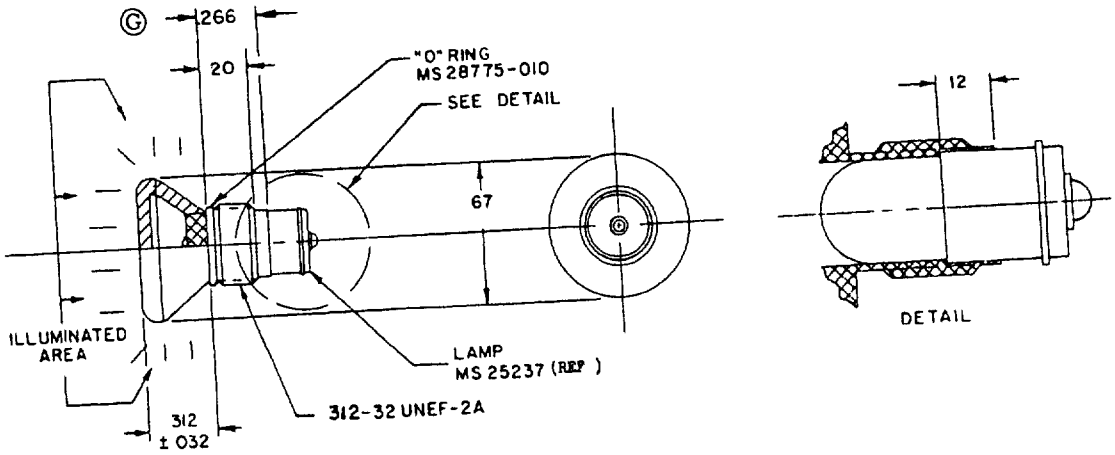


Configuration C

FIGURE 1. Lenses - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

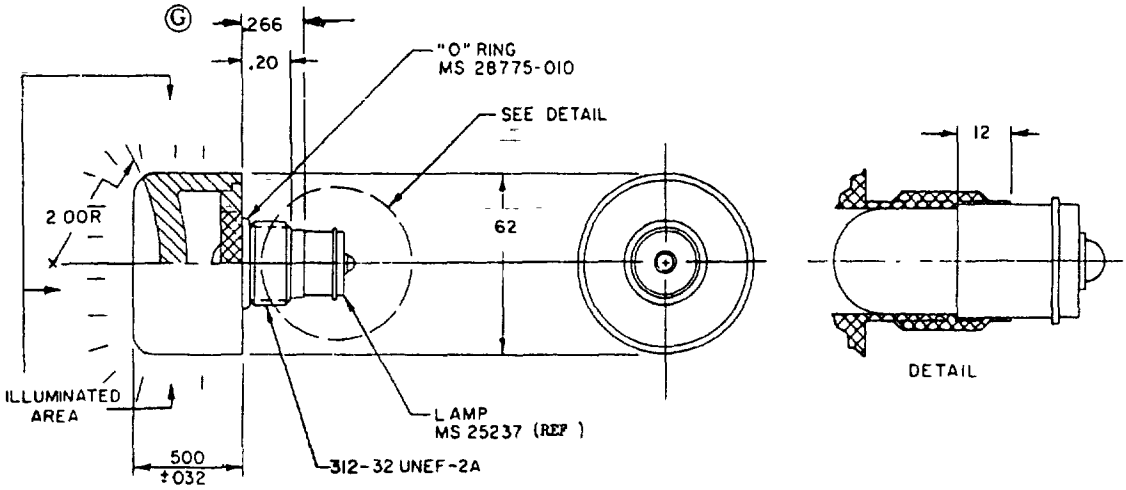

Configuration D

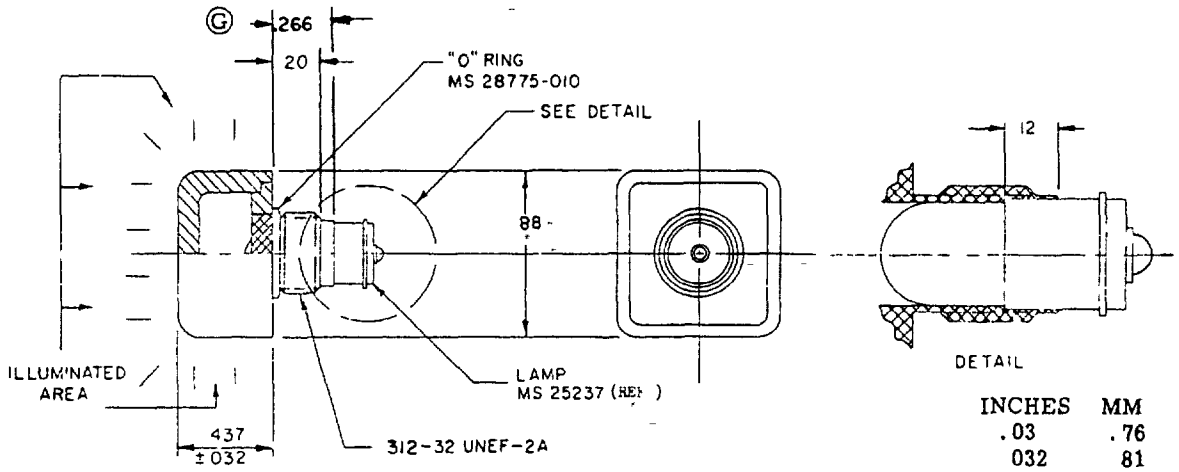

Configuration E

NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerances are ± 005(13 mm) for three place decimals and ± 02(51 mm) for two place decimals.
3. Internal design of lens is optional
4. Internal design of lamp retainer is optional.
5. Metric equivalents (to the nearest 01 mm) are given for general information only and are based upon 1 inch = 25 4 mm.

INCHES	MM
.03	.76
032	81
.12	3.05
.20	5.08
.266	6.76
.312	7.92
.437	11.10
50	12.70
.62	15.75
67	17 02
75	19 05
.81	20.57
.88	22.35
2 00	50 80

FIGURE 1. Lenses - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration See figure 1 and table I
Material See table I
Thermal shock 71° C maximum temperature (nonoperating)
Color coordinates See table II.
Part number M22885/1- (dash number from table I)

TABLE I Part number and lens characteristics

Part number 1/ M22885/1-	Configuration	Color	Brightness 2/	Material	Supersession data
			(3/4 face)		M22885/
01	A	Yellow	225 ft L	L-P-349	----
02	A	White	250 ft L	L-P-349	----
03	A	Red	20 ft L	L-P-349	----
04	A	Green	11 ft L	L-P-349	----
05	A	Blue	7 ft L	L-P-380	----
06	B	Yellow	150 ft L	L-P-349	3-01
07	B	White	200 ft L	L-P-349	3-02
08	B	Red	15 ft L	L-P-349	3-03
09	B	Green	18 ft L	L-P-349	3-04
10	B	Blue	4 ft L	L-P-380	3-05
11	C	Yellow	300 ft L	L-P-349	4-01
12	C	White	300 ft L	L-P-349	4-02
13	C	Red	25 ft L	L-P-349	4-03
14	C	Green	40 ft L	L-P-349	4-04
15	C	Blue	10 ft L	L-P-380	4-05
16	D	Yellow	150 ft L	L-P-349	5-01
17	D	White	200 ft L	L-P-349	5-02
18	D	Red	15 ft L	L-P-349	5-03
19	D	Green	18 ft L	L-P-349	5-04
20	D	Blue	4 ft L	L-P-380	5-05
21	E	Yellow	120 ft L	L-P-349	6-01
22	E	White	135 ft L	L-P-349	6-02
23	E	Red	14 ft L	L-P-349	6-03
24	E	Green	14 ft L	L-P-349	6-04
25	E	Blue	2 ft L	L-P-380	6-05

1/ Part numbers listed are for lenses without legends
2/ Brightness values are approximate at 2,100° ±50° Kelvin, utilizing a T-1-3/4 lamp having a mean spherical candlepower of 34 ±.02

TABLE II. Color coordinates.

Color coordinates ± 02		
	"x"	"y"
Yellow	579	417
White	526	413
Red	701	.292
Green	183	589
Blue	127	268

Intended use Lens shall accommodate one midget-flange-base T-1-3/4 incandescent lamp and shall be capable of mating with switch housings in accordance with MIL-S-22885/7 and MIL-S-22885/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

NOTE 1 Supersession data This specification includes the requirements of MIL-S-22885/1F dated 26 May 1972, MIL-S-22885/3D dated 30 April 1971, MIL-S-22885/4D dated 30 April 1971, MIL-S-22885/5D dated 30 April 1971, and MIL-S-22885/6D dated 30 April 1971

Custodians
Army - EL
Navy - EC
Air Force - 11

Review activities
Army - SL
Navy - SH, OS
Air Force - 17, 80
DSA - ES

User activities
Army - ME, AT, AV, WC
Navy - MC, AS
Air Force - 19

Preparing activity
Navy - EC

Agent
DSA - ES

(Project 5930-0860-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes" in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

S/N 0102-014-1801 C-25254

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.