INCH POUND

MIL-S-22885/1H
16 May 2003
SUPERSEDING
MIL-S-22885/1G
18 September 1972


MILITARY SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED LENSES (SCREW-IN, T-1-3/4 MFB LAMP)

Inactive for new design after 21 July 1997, except for replacement purposes.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for procuring the lenses described herein shall consist of this specification sheet and MIL-PRF-22885.

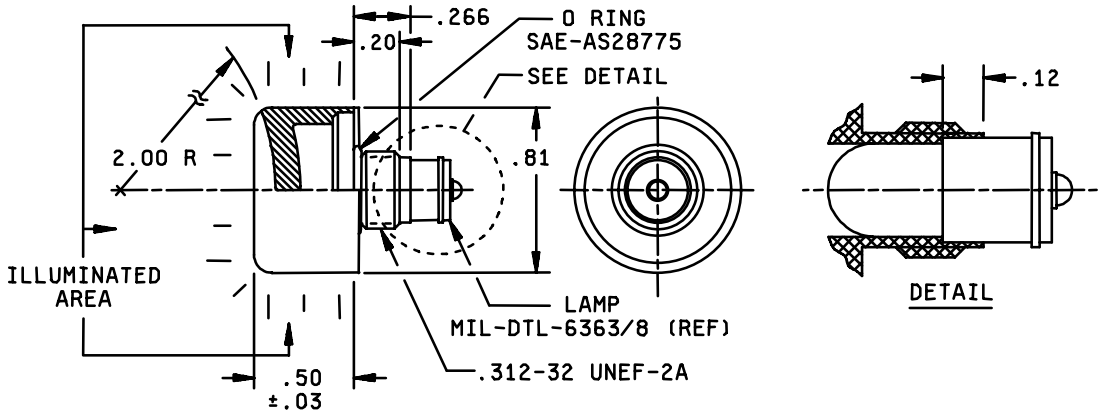


CONFIGURATION A


FIGURE 1. Lenses.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

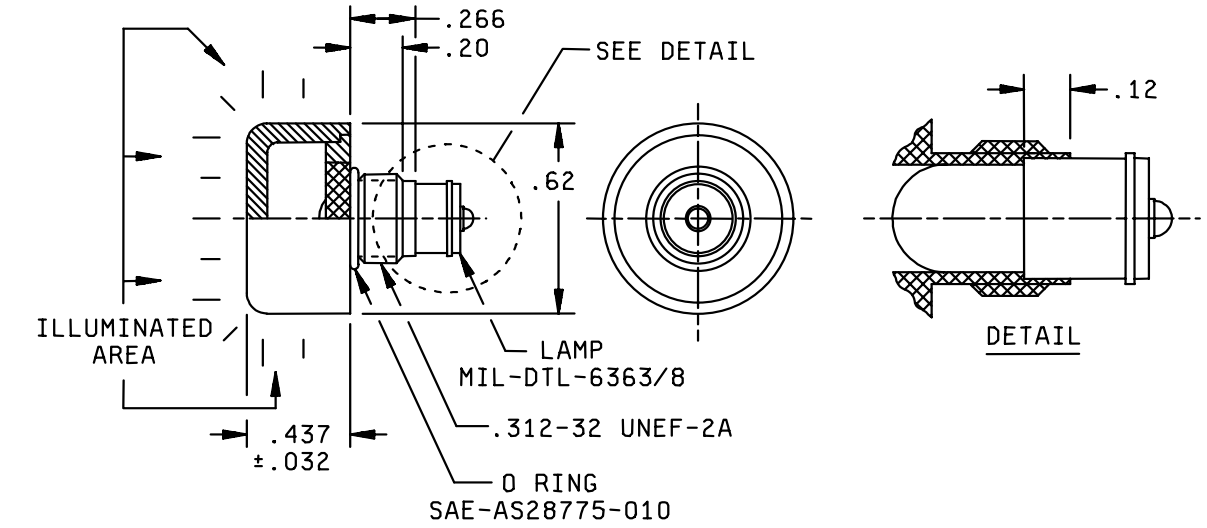


CONFIGURATION B

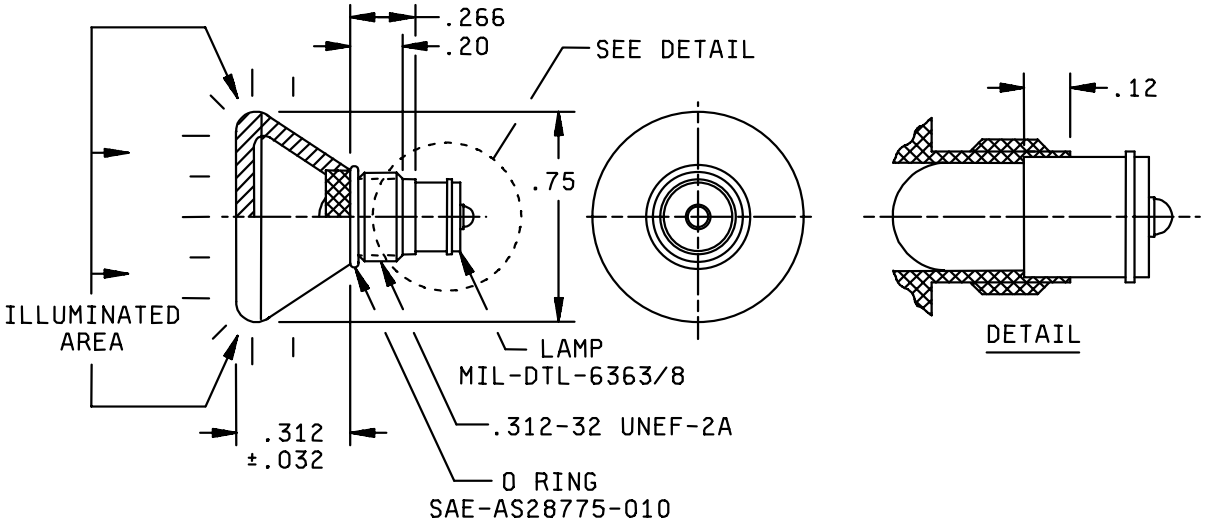


CONFIGURATION C

FIGURE 1. Lenses - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

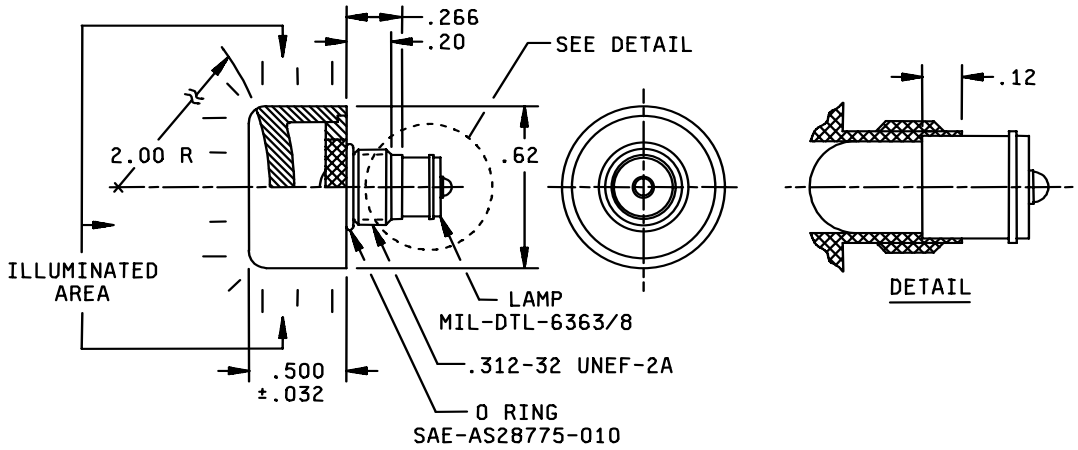

CONFIGURATION D

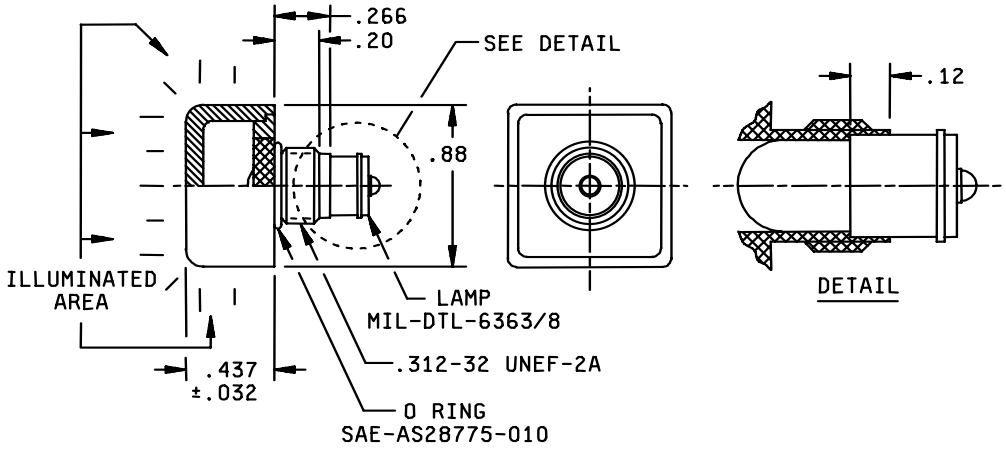

CONFIGURATION E

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.02 (.51 mm) or two place decimals.
3. Internal design of lens is optional.
4. Internal design of lamp retainer is optional.
5. Metric equivalents (to the nearest .01 mm) are given for general information only.

Inches	mm
.03	.76
.032	.81
.12	3.05
.20	5.08
.266	6.76
.312	7.92
.437	11.10
.50	12.70
.62	15.75
.67	17.02
.75	19.05
.81	20.57
.88	22.35
2.00	50.80

FIGURE 1. Lenses - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material: See table I.

Thermal shock: 71°C maximum temperature (nonoperating).

Color coordinates: See table II.

Part number: M22885/1- (dash number from table I).

TABLE I. Part number and lens characteristics.

Part number 1/ M22885/1	Configuration	Color	Brightness 2/ (3/4 face)	Material	Supersession data M22885/
01	A	Yellow	225 ft L	ASTM-D707	----
02	A	White	250 ft L	ASTM-D707	----
03	A	Red	20 ft L	ASTM-D707	----
04	A	Green	11 ft L	ASTM-D707	----
05	A	Blue	7 ft L	L-P-380	----
06	B	Yellow	150 ft L	ASTM-D707	3-01
07	B	White	200 ft L	ASTM-D707	3-02
08	B	Red	15 ft L	ASTM-D707	3-03
09	B	Green	18 ft L	ASTM-D707	3-04
10	B	Blue	4 ft L	L-P-380	3-05
11	C	Yellow	300 ft L	ASTM-D707	4-01
12	C	White	300 ft L	ASTM-D707	4-02
13	C	Red	25 ft L	ASTM-D707	4-03
14	C	Green	40 ft L	ASTM-D707	4-04
15	C	Blue	10 ft L	L-P-380	4-05
16	D	Yellow	150 ft L	ASTM-D707	5-01
17	D	White	200 ft L	ASTM-D707	5-02
18	D	Red	15 ft L	ASTM-D707	5-03
19	D	Green	18 ft L	ASTM-D707	5-04
20	D	Blue	4 ft L	L-P-380	5-05
21	E	Yellow	120 ft L	ASTM-D707	6-01
22	E	White	135 ft L	ASTM-D707	6-02
23	E	Red	14 ft L	ASTM-D707	6-03
24	E	Green	14 ft L	ASTM-D707	6-04
25	E	Blue	2 ft L	L-P-380	6-05

1/ Part numbers listed are for lenses without legends.
2/ Brightness values are approximate at 2,100° ±50° Kelvin, utilizing a T-1-3/4 lamp having a mean spherical candlepower of .34 ±.02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

TABLE II. Color coordinates.

Color coordinates ±.02		
	"x"	"y"
Yellow	.579	.417
White	.526	.413
Red	.701	.292
Green	.183	.589
Blue	.127	.268

Intended use: Lens shall accommodate one midget-flange-base T-1-3/4 incandescent lamp and shall be capable of mating with switch housings in accordance with MIL-S-22885/8.

NOTE 1: Supersession data. This specification includes the requirements of MIL-S-22885/1F dated 26 May 1972, MIL-S-22885/3D dated 30 April 1971, MIL-S-22885/4D dated 30 April 1971, MIL-S-22885/5D dated 30 April 1971, and MIL-S-22885/6D dated 30 April 1971.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, AT, AV, CR4
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity:
DLA - CC

(Project 5930-1763-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.