INCH-POUND
MIL-S-22885/1J
11 May 2010
SUPERSEDING
MIL-S-22885/1H
16 May 2003

MILITARY SPECIFICATION SHEET

SWITCH, PUSH BUTTON, ILLUMINATED LENSES (SCREW-IN, T-1-3/4 MFB LAMP)

Inactive for new design after 21 July 1997, except for replacement purposes.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification sheet and MIL-PRF-22885.


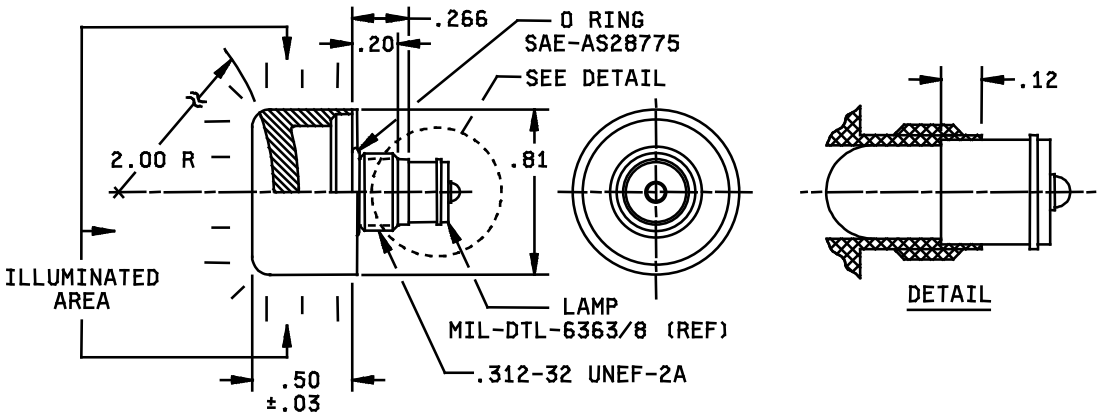


FIGURE 1. Lenses.


AMSC N/A

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

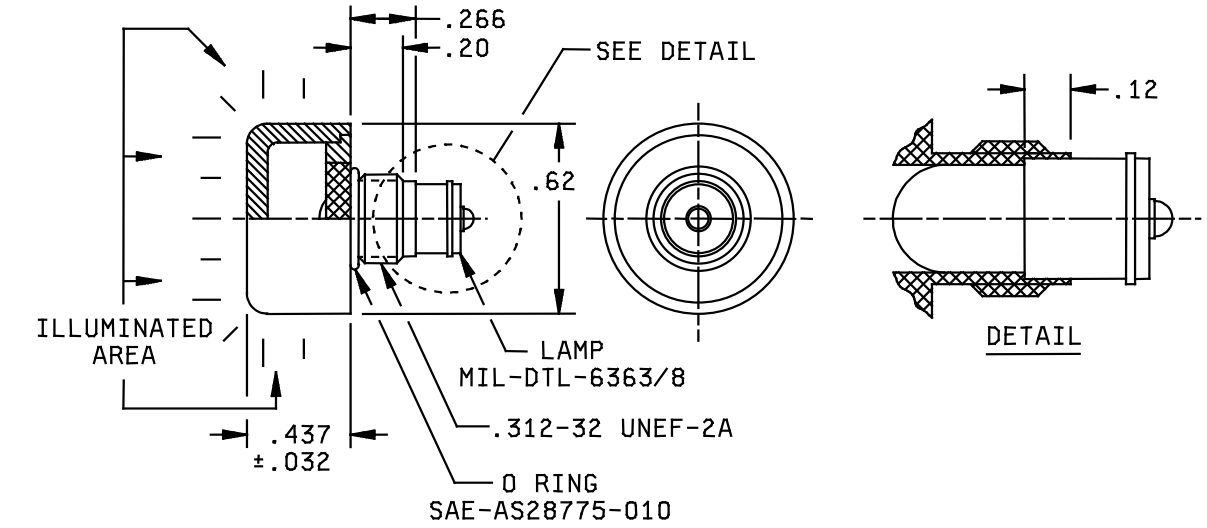


CONFIGURATION B

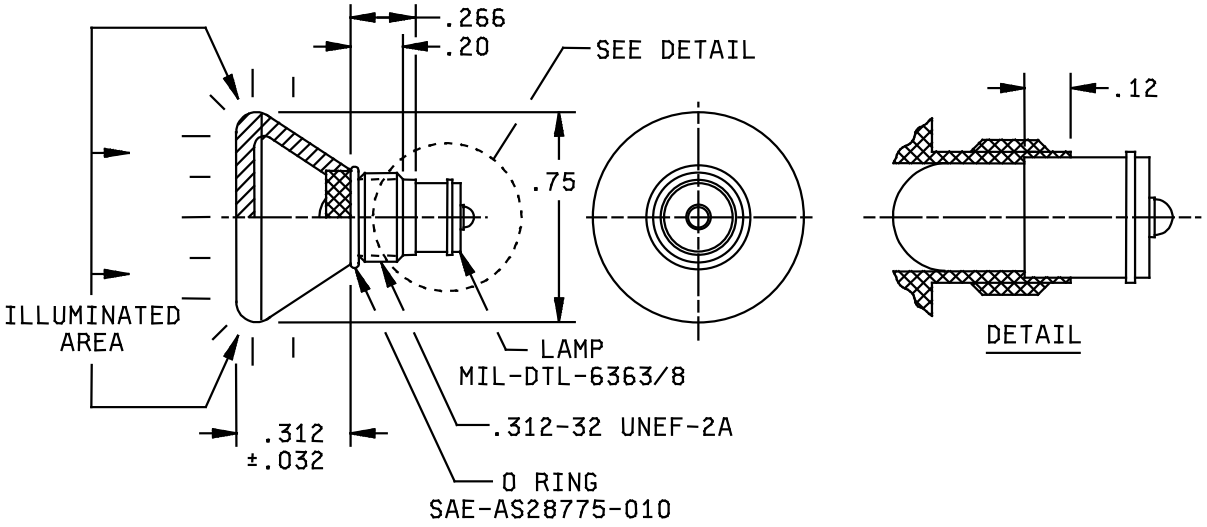


CONFIGURATION C

FIGURE 1. Lenses - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

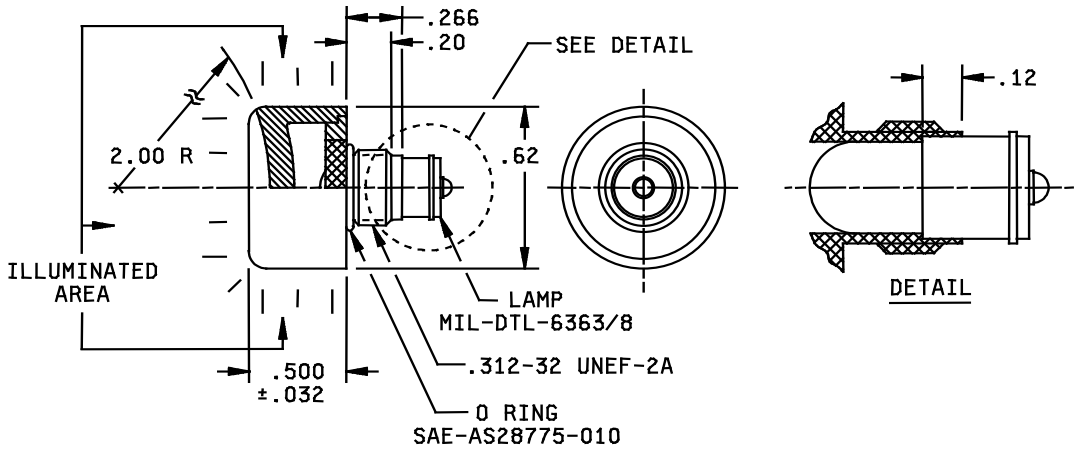

CONFIGURATION D

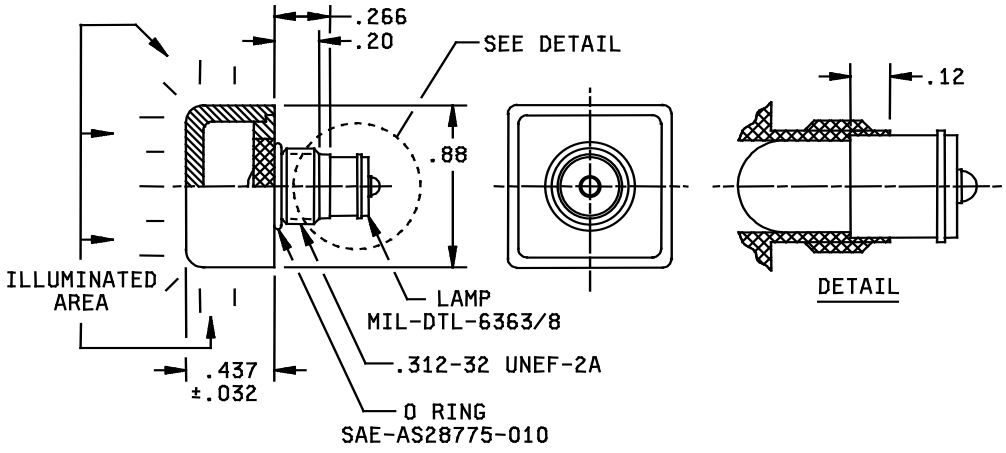

CONFIGURATION E

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and ±.02 (.51 mm) or two place decimals.
3. Internal design of lens is optional.
4. Internal design of lamp retainer is optional.
5. Metric equivalents (to the nearest .01 mm) are given for general information only.

Inches	mm
.03	.76
.032	.81
.12	3.05
.20	5.08
.266	6.76
.312	7.92
.437	11.10
.50	12.70
.62	15.75
.67	17.02
.75	19.05
.81	20.57
.88	22.35
2.00	50.80

FIGURE 1. Lenses - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Material: See table I.

Thermal shock: 71°C maximum temperature (nonoperating).

Color coordinates: See table II.

Part number: M22885/1- (dash number from table I).

TABLE I. Part number and lens characteristics.

Part number 1/ M22885/1	Configuration	Color	Brightness 2/ (3/4 face)	Material	Supersession data M22885/
01	A	Yellow	225 ft L	ASTM-D707	----
02	A	White	250 ft L	ASTM-D707	----
03	A	Red	20 ft L	ASTM-D707	----
04	A	Green	11 ft L	ASTM-D707	----
05	A	Blue	7 ft L	L-P-380	----
06	B	Yellow	150 ft L	ASTM-D707	3-01
07	B	White	200 ft L	ASTM-D707	3-02
08	B	Red	15 ft L	ASTM-D707	3-03
09	B	Green	18 ft L	ASTM-D707	3-04
10	B	Blue	4 ft L	L-P-380	3-05
11	C	Yellow	300 ft L	ASTM-D707	4-01
12	C	White	300 ft L	ASTM-D707	4-02
13	C	Red	25 ft L	ASTM-D707	4-03
14	C	Green	40 ft L	ASTM-D707	4-04
15	C	Blue	10 ft L	L-P-380	4-05
16	D	Yellow	150 ft L	ASTM-D707	5-01
17	D	White	200 ft L	ASTM-D707	5-02
18	D	Red	15 ft L	ASTM-D707	5-03
19	D	Green	18 ft L	ASTM-D707	5-04
20	D	Blue	4 ft L	L-P-380	5-05
21	E	Yellow	120 ft L	ASTM-D707	6-01
22	E	White	135 ft L	ASTM-D707	6-02
23	E	Red	14 ft L	ASTM-D707	6-03
24	E	Green	14 ft L	ASTM-D707	6-04
25	E	Blue	2 ft L	L-P-380	6-05

1/ Part numbers listed are for lenses without legends.
2/ Brightness values are approximate at 2,100° ±50° Kelvin, utilizing a T-1-3/4 lamp having a mean spherical candlepower of .34 ±.02.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

TABLE II. Color coordinates.

Color coordinates ±.02		
	"x"	"y"
Yellow	.579	.417
White	.526	.413
Red	.701	.292
Green	.183	.589
Blue	.127	.268

Intended use: Lens shall accommodate one midget-flange-base T-1-3/4 incandescent lamp and shall be capable of mating with switch housings in accordance with MIL-S-22885/8.

The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Reference documents:
MIL-PRF-22885
MIL-S-22885/8
MIL-DTL-6363/8
ASTM-D707
L-P-380
SAE-AS28775

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2008-051)

Review activities:
Army - AR, AT, AV, CR4
Navy - AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.