

MILITARY SPECIFICATION SHEET


SWITCH, PUSH BUTTON, ILLUMINATED, ALTERNATE ACTION (2 CIRCUIT - 5 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switch described herein shall consist of this document and the latest issue of Specification MIL-S-22885.

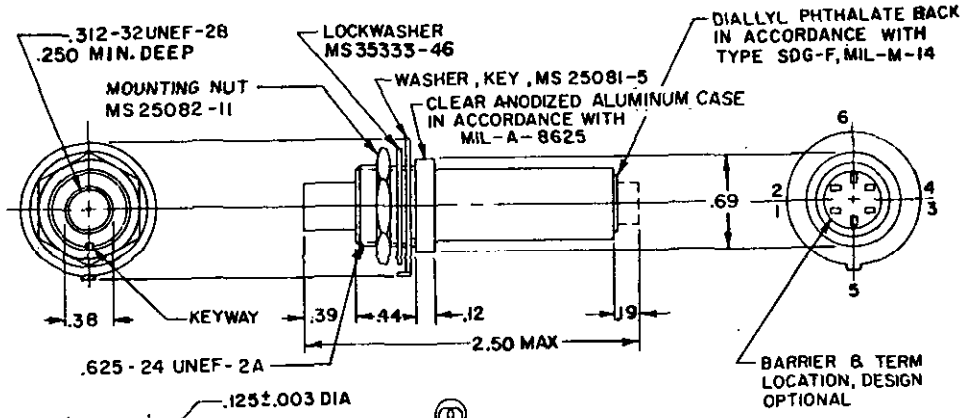





INCHES	MM	INCHES	MM
.003	.08	.39	9.91
.005	.13	.44	11.18
.02	.51	.500	12.70
.022	.56	.62	15.75
.12	3.05	.625	15.88
.125	3.18	.69	17.53
.19	4.83	.75	19.05
.25	6.35	.88	22.35
.38	9.65	2.50	63.50

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.03 (.76 mm).
3. All terminals shall be insulated from case.
4. Terminals shall be permanently identified as shown on schematic diagram.
5. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

(E) denotes changes

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(E) Dimensions and configuration: See figure and table III.

Weight: 0.82 ounce maximum.

Ratings:
Electrical: See table I.
Operating temperature: -40° C to +55° C.
Operating force: 4-1/2 ±1 lbs; not less than 2-1/2 lbs after electrical endurance test.
Plunger travel: .203 ±.02 inch.

TABLE I. Electrical ratings.

Load	28 Vdc (amperes)	115 Vac (amperes)
Resistive	5	5
Inductive	3	3

Shock: Method I, except contact opening shall be 1/2 millisecond, maximum; method II is applicable.

Seal: Dripproof.

Insulation resistance: Shall be not less than 25 megohms at high humidity conditions following step 6 of the final cycle of moisture resistance test.

(E) Part number: M22885/7- (dash number from table III).

(E) TABLE II. Extent of qualification.

Switch	Tests of MIL-S-22885	Extent of approval
M22885/7-02 (20 sample units) 1/	All tests per table X	All
M22885/1-01 thru -05 (2 each color) 1/	2 each group VIII, table X	

1/ Two lenses of each color may be installed on samples submitted to the tests of groups II thru VII for use in group VIII tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T14:13Z
Check the source to verify that this is the current version before use.

Ⓔ TABLE III. Part number and design characteristics.

Part number M22885/7-	Lens M22885/1-	Circuit characteristic	Operation	Lens type
01 1/	---	Two circuit	Alternate-Action	---
02	01 (Yellow)	1 NO		Screw-in
03	02 (White)			
04	03 (Red)			
05	04 (Green)			
06	05 (Blue)			
07	06 (Yellow)			
08	07 (White)			
09	08 (Red)			
10	09 (Green)			
11	10 (Blue)			
12	11 (Yellow)			
13	12 (White)			
14	13 (Red)			
15	14 (Green)			
16	15 (Blue)			
17	16 (Yellow)			
18	17 (White)			
19	18 (Red)			
20	19 (Green)			
21	20 (Blue)			
22	21 (Yellow)			
23	22 (White)			
24	23 (Red)			
25	24 (Green)	Two circuit		
26	25 (Blue)	1 NO	Alternate-Action	Screw-in

1/ This is a switch housing which does not contain lens.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, SL, MI
Navy - SH
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - ME, AT, AV, WC
Navy - MC, AS, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5930-0872-1)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1973-713-144/158

Source: https://assist.dla.mil -- Downloaded: 202610-19T14:13Z
Check the source to verify that this is the current version before use.