QUALIFICATION REQUIREMENTS REMOVED



MILITARY SPECIFICATION

# MICROCIRCUITS, DIGITAL, DTL, NAND BUFFER/EXTENDER, MONOLITHIC SILICON

INACTIVE FOR NEW DESIGN AFTER DATE OF THIS REVISION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, DTL, NAND buffer/extender microcircuits. One product assurance class and a choice of case outlines and lead finishes are provided and are reflected in the complete part number.

1.2 Part number. The part number shall be in accordance with MIL-M-38510. With the exception that the "JAN" or "J" certification shall not be used.

1.2.1 Device type. The device type shall be as follows:

| Device type | Circuit |
|---|---|
| 01 | Expandable, dual, 4-input NAND buffer |
| 02 | Expandable, dual, 4-input NAND buffer (open collector) |
| 03 | Quad, 2-input NAND buffer |
| 04 | Quad, 2-input NAND buffer (open collector) |
| 05 | Dual, 4-input extender |

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

| Outline letter | Case outline (see MIL-M-38510, appendix C) |
|---|---|
| A | F-1 (14-lead, 1/4" x 1/4"), flat package |
| B | F-3 (14-lead, 3/16" x 1/4"), flat package |
| C | D-1 (14-lead, 1/4" x 3/4"), dual-in-line package |
| D | F-2 (14-lead, 1/4" x 3/8"), flat package |

1.3 Absolute maximum ratings.

| | |
|---|---|
| Supply voltage range | -0.5 V dc to +8.0 V dc |
| Input voltage range | -1.5 V dc to +5.5 V dc |
| Storage temperature range | -65°C to +150°C |
| Maximum power dissipation, per gate ($P_D$) 1/: | |
| Device type 01 | 67 mW dc |
| Device type 02 | 50 mW dc |
| Device type 03 | 33 mW dc |
| Device type 04 | 43 mW dc |
| Lead temperature (soldering, 10 seconds) | +300°C |
| Thermal resistance, junction-to-case ($\theta_{JC}$): | |
| Cases A, B, and D | 0.09°C/mW |
| Case C | 0.08°C/mW |
| Junction temperature ($T_J$) | +175°C |

1/ Must withstand the added $P_D$ due to short circuit test (e.g., $I_{OS}$).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.



Source: https://assist.dla.mil -- Downloaded: 202640-21T13:00Z
Check the source to verify that this is the current version before use.

1.4 Recommended operating conditions.

| | |
|---|---|
| Supply voltage range ($V_{CC}$) | +4.5 V dc minimum to +5.5 V dc maximum |
| Minimum high-level input voltage ($V_{IH}$) | +1.9 V dc @ +25°C |
| Maximum low-level input voltage ($V_{IL}$) | +1.1 V dc @ +25°C |
| Normalized fanout (each output) 2/: | |
| Device types 01, 02, and 03 | 25 maximum |
| Device type 04 | 27 maximum |
| Device type 05 | 20 maximum |
| Case operating temperature range ($T_C$) | -55°C to +125°C |

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Logic diagrams and terminal connections. The logic diagrams and terminal connections shall be as specified on figure 1.

3.2.2 Truth tables and logic equations. The truth tables and logic equations shall be as specified on figure 2.

3.2.3 Case outlines. Case outlines shall be as specified in MIL-M-38510 and in 1.2.3 herein.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510 and 1.2 herein. At the option of the manufacturer, marking of the country of origin may be omitted from the body of the microcircuit, but shall be retained on the initial container. The "JAN" or "J" certification mark shall not be used.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

| Test | Symbol | Conditions 1/ | Device | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|
| High-level output voltage | $V_{OH}$ | $V_{CC}$ = +4.5 V | 01, 03 | 3.3 | | V |
| Low-level output voltage | $V_{OL}$ | $V_{CC}$ = +4.5 V<br>$I_{OL}$ = +36 mA | 01, 02,<br>03, 04 | | 0.45 | V |
| High-level input current | $I_{IH1}$ | $V_{CC}$ = +5.5 V | All | | 5.0 | µA |
| | $I_{IH2}$ | | 05 | | 10 | µA |
| Low-level input current | $I_{IL}$ | $V_{CC}$ = +5.5 V | 01, 02,<br>03, 04 | | -1.50 | mA |
| Output transistor leakage current | $I_{CEX}$ | $V_{CC}$ = +4.5 V | 01, 02,<br>03, 04 | | 50 | µA |
| Short circuit output current | $I_{OS}$ | $V_{CC}$ = +5.5 V<br>$V_{IN}$ = GND 2/ | 01<br>03 | 16 | | mA |
| High-level supply current per gate | $I_{CCH1}$ | $V_{CC}$ = +5.0 V<br>$V_{IN}$ = GND | 01, 02,<br>03, 04 | | 1.47 | mA |
| High-level supply current per gate | $I_{CCH2}$ | $V_{CC}$ = +8.0 V<br>$V_{IN}$ = GND | 01, 02,<br>03, 04 | | 3.0 | mA |
| Low-level supply current per gate | $I_{CCL}$ | $V_{CC}$ = +5.0 V<br>$V_{IN}$ = OPEN | 01, 03 | | 13.3 | mA |
| | | | 02, 04 | | 10.0 | mA |
| Propagation delay time high-to-low level | $t_{PHL}$ | $V_{CC}$ = +5.0 V<br>$R_L$ = 150Ω, $C_L$ = 500 pF | 01, 03 | 15 | 80 | ns |
| | | | 02, 04 | 10 | 45 | ns |
| Propagation delay time low-to-high level | $t_{PLH}$ | $V_{CC}$ = +5.0 V<br>$R_L$ = 510Ω, $C_L$ = 500 pF | 01, 03 | 25 | 140 | ns |
| | | | 02, 04 | 15 | 120 | ns |
| Forward voltage drop | $V_F$ | $I_F$ = 2 mA | 05 | 0.5 | 0.98 | V |

1/ Complete terminal conditions shall be as specified in table III.
2/ Not more than one output should be shorted at a time.

3.7 Manufacturer eligibility. To be eligible to supply microcircuits to this specification, a manufacturer shall have a manufacturer certification in accordance with MIL-M-38510 for at least one line. Not necessarily the line producing the device type described herein.

3.8 Certification. Certification in accordance with MIL-M-38510 is not required for this device.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

| MIL-STD-883 test requirements | Subgroups (see table III) |
|---|---|
| | Class B devices |
| Interim electrical parameters (pre burn-in) (method 5004) | 1 |
| Final electrical test parameters (method 5004) | 1*,2,3,9 |
| Group A test requirements (method 5005) | 1,2,3,9 |
| Groups C and D end-point electrical parameters (method 5005) | 1,2,3 |
| Additional electrical subgroups for group C periodic inspections | 10,11 |

*PDA applies to subgroup 1 (see 4.2c).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883).

(1) Test condition D or E, using the circuit shown on figure 3, or equivalent.

(2) $T_A$ = +125°C minimum.

b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) for class B devices shall be 10 percent based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883, and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of group A, subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class.

4.3 Qualification inspection. Qualification inspection is not required.


4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510, and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4). Generic test data (see 6.6) may be used to satisfy the requirements for groups C and D inspections. Quality conformance inspection shall be completed on the specific devices covered by this specification before they are shipped.




Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

Device types 01 and 02

Cases A, B, and D

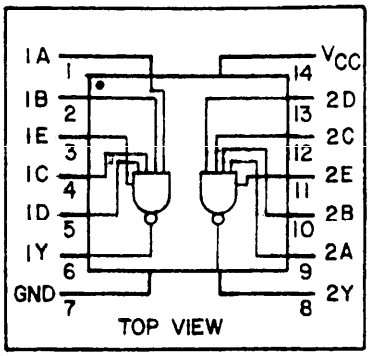



Case C

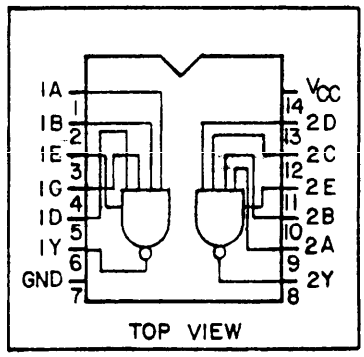



Device type 03 and 04

Cases A, B, and D

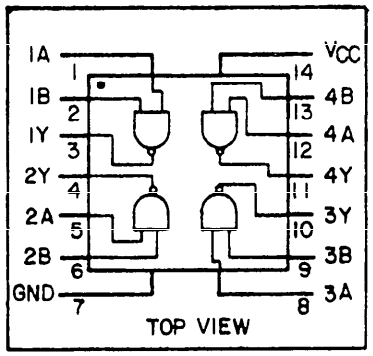



Case C

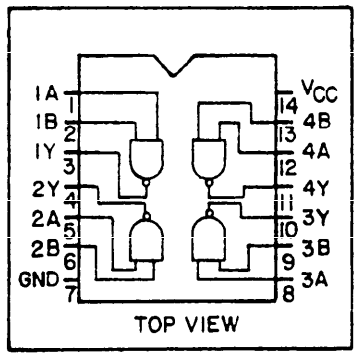


Device type 05

Cases A, B, and D

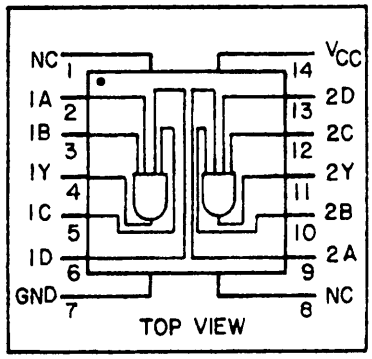


Case C

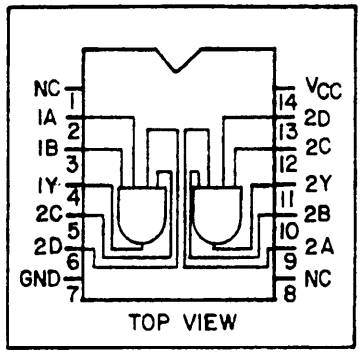



FIGURE 1. Logic diagram and terminal connections.



Source: https://assist.dla.mil -- Downloaded: 2026-01-21T13:00Z
Check the source to verify that this is the current version before use.

Device type 01 and 02

| Truth table each gate | | | | | |
|---|---|---|---|---|---|
| Inputs | | | | | Output |
| A | B | C | D | X | Y |
| 1 | 1 | 1 | 1 | 1 | 0 |
| 0 | 1 | 1 | 1 | 1 | 1 |
| 1 | 0 | 1 | 1 | 1 | 1 |
| 1 | 1 | 0 | 1 | 1 | 1 |
| 1 | 1 | 1 | 0 | 1 | 1 |
| 1 | 1 | 1 | 1 | 0 | 1 |
| 0 | 0 | 0 | 0 | 0 | 1 |

Positive logic:
$Y = \overline{A \cdot B \cdot C \cdot D \cdot \{X\}}$

Device type 03 and 04

| Truth table each gate | | |
|---|---|---|
| Inputs | | Output |
| A | B | Y |
| 0 | 0 | 1 |
| 1 | 0 | 1 |
| 0 | 1 | 1 |
| 1 | 1 | 0 |

Positive logic:
$Y = \overline{A \cdot B}$

Device type 05


| Truth table each gate | | |
|---|---|---|
| Inputs | | Output |
| A | B | Y |
| 0 | 0 | 0 |
| 1 | 0 | 0 |
| 0 | 1 | 0 |
| 1 | 1 | 1 |

Positive logic:
$Y = A \cdot B$

FIGURE 2. Truth tables.



Source: https://assist.dla.mil -- Downloaded: 202610-21T13:00Z
Check the source to verify that this is the current version before use.

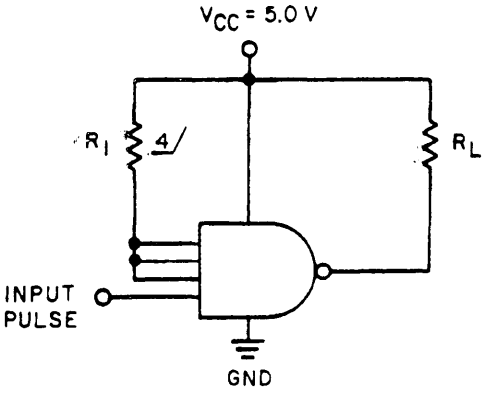



| DEVICE TYPE | $R_L$ |
|---|---|
| 01,02<br>03,04 | 150Ω<br>±5% |
| 05 | 4 kΩ<br>±5% |

NOTES:
1. The input pulse characteristics are: $V_{gen}$ = 4.0 V, PRR = 100 kHz, duty cycle = 50%, $t_{TLH}$ = 100 ns, and $t_{THL}$ = 100 ns.
2. All input adjustments are 5%.
3. For parallel excitation: Clock pulse shall be 1 MHz and undriven inputs shall be connected to $V_{CC}$ through appropriate current limiting resistor.
4. All undriven inputs are connected to $V_{CC}$ through appropriate current limiting resistor.


FIGURE 3. Burn-in and life test circuit.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

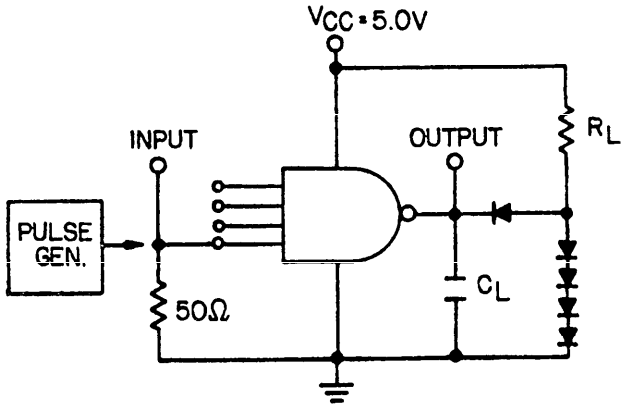


| | $t_{PLH}$ | $t_{PHL}$ |
|---|---|---|
| $R_L$ | 510Ω | 150Ω |
| $C_L$ | 500 pF | 500 pF |

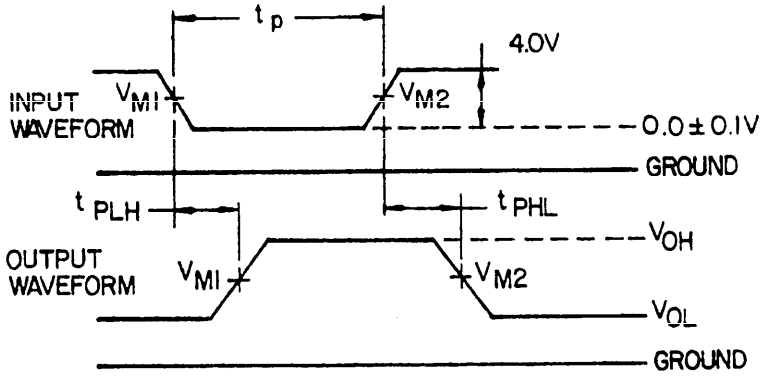


NOTES:
1. The generator has the following characteristics: $V_{gen}$ = 4.0 V, $t_{TLH}$ = 10 ns, $t_{THL}$ = 10 ns, PRR = 1.0 MHz, $t_p$ = 110 ns ±10 ns.
2. All input adjustments are ±5%.
3. $C_L$ includes all jig and probe capacitance.
4. All diodes are 1N4150 or equivalent.
5. Device types 02 and 04 shall use a 2 kΩ pull up resistor.

| TEMP (°C) | $V_{M1}$ (volts) | $V_{M2}$ (volts) |
|---|---|---|
| 25 | 1.5 | 1.5 |
| 125 | 1.2 | 1.2 |
| -55 | 1.7 | 1.7 |

FIGURE 4. Switching time test circuit.



Source: https://assist.dla.mil -- Downloaded: 202610-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 1A | 2 1B | 3 1E | 4 1C | 5 1D | 6 1Y | 7 GND | 8 2Y | 9 2A | 10 2B | 11 2E | 12 2C | 13 2D | 14 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1<br>$T_C$ = +25°C | $V_{OL}$ | 3007<br>3007 | 1<br>2 | 1.9 V | 1.9 V | | 1.9 V | 1.9 V | 36 mA | GND<br>" | 36 mA | 1.9 V | 1.9 V | | 1.9 V | 1.9 V | 4.5 V<br>" | 1Y<br>2Y | | 0.4<br>0.4 | V<br>" |
| | $V_{OH}$ | 3006<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 3<br>4<br>5<br>6<br>7<br>8<br>9<br>10 | 1.1 V | 1.1 V | | 1.1 V | 1.1 V | -2.5 mA<br>"<br>"<br>" | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | -2.5 mA | 1.1 V | 1.1 V | | 1.1 V | 1.1 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1Y<br>1Y<br>1Y<br>1Y<br>2Y<br>2Y<br>2Y<br>2Y | 3.4<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $V_{OH(E)}$ | "<br>" | 11<br>12 | | | 1.8 V | | | -2.5 mA | "<br>" | -2.5 mA | | | 1.8 V | | | "<br>" | 1Y<br>2Y | "<br>" | | "<br>" |
| | $I_{OS}$ | 3011<br>3011 | 13<br>14 | GND | | | | | GND | "<br>" | GND | GND | | | | | 5.5 V<br>" | 1Y<br>2Y | -18<br>-18 | | mA<br>mA |
| | $I_{IH1}$ | 3010<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 15<br>16<br>17<br>18<br>19<br>20<br>21<br>22 | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | 0<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 2.0<br>"<br>"<br>"<br>"<br>"<br>"<br>" | µA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{IL}$ | 3009<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 23<br>24<br>25<br>26<br>27<br>28<br>29<br>30 | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | -0.6<br>"<br>"<br>"<br>"<br>"<br>"<br>" | -1.50<br>"<br>"<br>"<br>"<br>"<br>"<br>" | mA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{CEX}$ | | 31<br>32 | 1.1 V | | | | | 4.5 V | "<br>" | 4.5 V | 1.1 V | | | | | 4.5 V<br>4.5 V | 1Y<br>2Y | | 50<br>50 | µA<br>µA |
| | $I_{CCL}$ | 3005 | 33 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 26.6 | mA |
| | $I_{CCH1}$ | " | 34 | GND | | | | | | " | | GND | | | | | 5.0 V | $V_{CC}$ | | 2.94 | " |
| | $I_{CCH2}$ | " | 35 | GND | | | | | | " | | GND | | | | | 8.0 V | $V_{CC}$ | | 6.0 | " |





Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 1A | 2 1B | 3 1E | 4 1C | 5 1D | 6 1Y | 7 GND | 8 2Y | 9 2A | 10 2B | 11 2E | 12 2C | 13 2D | 14 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2 $T_C$ = +125°C | $V_{OL}$ | 3007 | 36 | 1.7 V | 1.7 V | | 1.7 V | 1.7 V | 36 mA | GND | 36 mA | 1.7 V | 1.7 V | | 1.7 V | 1.7 V | 4.5 V | 1Y | | 0.45 | V |
| | | 3007 | 37 | | | | | | | " | | | | | | | " | 2Y | | 0.45 | " |
| | $V_{OH}$ | 3006 | 38 | 0.8 V | | | | | -4 mA | " | | | | | | | " | 1Y | 3.3 | | " |
| | | " | 39 | | 0.8 V | | | | " | " | | | | | | | " | 1Y | " | | " |
| | | " | 40 | | | | 0.8 V | | " | " | | | | | | | " | 1Y | " | | " |
| | | " | 41 | | | | | 0.8 V | " | " | | | | | | | " | 1Y | " | | " |
| | | " | 42 | | | | | | " | " | -4 mA | 0.8 V | | | | | " | 2Y | " | | " |
| | | " | 43 | | | | | | " | " | " | | 0.8 V | | | | " | 2Y | " | | " |
| | | " | 44 | | | | | | " | " | " | | | | 0.8 V | | " | 2Y | " | | " |
| | | " | 45 | | | | | | " | " | " | | | | | 0.8 V | " | 2Y | " | | " |
| | $V_{OH(E)}$ | " | 46 | | | 1.3 V | | | -4 mA | " | | | | | | | " | 1Y | " | | " |
| | | " | 47 | | | | | | | " | -4 mA | | | 1.3 V | | | " | 2Y | " | | " |
| | $I_{OS}$ | 3011 | 48 | GND | | | | | GND | " | | | | | | | 5.5 V | 1Y | -16 | | mA |
| | | 3011 | 49 | | | | | | | " | GND | GND | | | | | " | 2Y | -16 | | mA |
| | $I_{IH1}$ | 3010 | 50 | 4.0 V | GND | | GND | GND | | " | | | | | | | " | 1A | | 5.0 | µA |
| | | " | 51 | GND | 4.0 V | | GND | " | | " | | | | | | | " | 1B | | " | " |
| | | " | 52 | " | GND | | 4.0 V | " | | " | | | | | | | " | 1C | | " | " |
| | | " | 53 | " | GND | | GND | 4.0 V | | " | | | | | | | " | 1D | | " | " |
| | | " | 54 | | | | | | | " | | 4.0 V | GND | | GND | GND | " | 2A | | " | " |
| | | " | 55 | | | | | | | " | | GND | 4.0 V | | GND | " | " | 2B | | " | " |
| | | " | 56 | | | | | | | " | | " | GND | | 4.0 V | " | " | 2C | | " | " |
| | | " | 57 | | | | | | | " | | " | GND | | GND | 4.0 V | " | 2D | | " | " |
| | $I_{IL}$ | 3009 | 58 | 0.4 V | 4.0 V | | 4.0 V | 4.0 V | | " | | | | | | | " | 1A | -.60 | -1.50 | mA |
| | | " | 59 | 4.0 V | 0.4 V | | 4.0 V | " | | " | | | | | | | " | 1B | " | " | " |
| | | " | 60 | " | 4.0 V | | 0.4 V | " | | " | | | | | | | " | 1C | " | " | " |
| | | " | 61 | " | 4.0 V | | 4.0 V | 0.4 V | | " | | | | | | | " | 1D | " | " | " |
| | | " | 62 | | | | | | | " | | 0.4 V | 4.0 V | | 4.0 V | 4.0 V | " | 2A | " | " | " |
| | | " | 63 | | | | | | | " | | 4.0 V | 0.4 V | | 4.0 V | " | " | 2B | " | " | " |
| | | " | 64 | | | | | | | " | | " | 4.0 V | | 0.4 V | " | " | 2C | " | " | " |
| | | " | 65 | | | | | | | " | | " | 4.0 V | | 4.0 V | 0.4 V | " | 2D | " | " | " |
| | $I_{CEX}$ | | 66 | 0.8 V | | | | | 4.5 V | " | | | | | | | 4.5 V | 1Y | | 50 | µA |
| | | | 67 | | | | | | | " | 4.5 V | 0.8 V | | | | | 4.5 V | 2Y | | 50 | µA |
| | $I_{CCL}$ | 3005 | 68 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 26.6 | mA |
| | $I_{CCH1}$ | " | 69 | GND | | | | | | " | | GND | | | | | 5.0 V | $V_{CC}$ | | 2.94 | " |
| | $I_{CCH2}$ | " | 70 | GND | | | | | | " | | GND | | | | | 8.0 V | $V_{CC}$ | | 6.0 | " |



Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 1A | 1B | 1E | 1C | 1D | 1Y | GND | 2Y | 2A | 2B | 2E | 2C | 2D | $V_{CC}$ | | | | |
| 3<br>$T_C$ = -55°C | $V_{OL}$ | 3007<br>3007 | 71<br>72 | 2.1 V | 2.1 V | | 2.1 V | 2.1 V | 36 mA | GND<br>" | 36 mA | 2.1 V | 2.1 V | | 2.1 V | 2.1 V | 4.5 V<br>" | 1Y<br>2Y | | 0.40<br>0.40 | V<br>" |
| | $V_{OH}$ | 3006<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 73<br>74<br>75<br>76<br>77<br>78<br>79<br>80 | 1.4 V | 1.4 V | | 1.4 V | 1.4 V | -2 mA | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | -2 mA | 1.4 V | 1.4 V | | 1.4 V | 1.4 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1Y<br>1Y<br>1Y<br>1Y<br>2Y<br>2Y<br>2Y<br>2Y | 3.3<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $V_{OH(E)}$ | "<br>" | 81<br>82 | | | 2.1 V | | | -2 mA | "<br>" | -2 mA | | | 2.1 V | | | "<br>" | 1Y<br>2Y | "<br>" | | "<br>" |
| | $I_{OS}$ | 3011<br>3011 | 83<br>84 | GND | | | | | GND | "<br>" | GND | GND | | | | | 5.5 V<br>" | 1Y<br>2Y | -16<br>-16 | | mA<br>mA |
| | $I_{IH1}$ | 3010<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 85<br>86<br>87<br>88<br>89<br>90<br>91<br>92 | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | | 2.0<br>"<br>"<br>"<br>"<br>"<br>"<br>" | µA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{IL}$ | 3009<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 93<br>94<br>95<br>96<br>97<br>98<br>99<br>100 | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | -0.6<br>"<br>"<br>"<br>"<br>"<br>"<br>" | -1.50<br>"<br>"<br>"<br>"<br>"<br>"<br>" | mA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{CEX}$ | | 101<br>102 | 1.4 V | | | | | 4.5 V | "<br>" | 4.5 V | 1.4 V | | | | | 4.5 V<br>4.5 V | 1Y<br>2Y | | 50<br>50 | µA<br>µA |
| | $I_{CCL}$ | 3005 | 103 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 26.6 | mA |
| | $I_{CCH1}$ | " | 104 | GND | | | | | | " | | GND | | | | | 5.0 V | $V_{CC}$ | | 2.94 | " |
| | $I_{CCH2}$ | " | 105 | GND | | | | | | " | | GND | | | | | 8.0 V | $V_{CC}$ | | 6.0 | " |





Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued 1/.

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 1A | 2 1B | 3 1E | 4 1C | 5 1D | 6 1Y | 7 GND | 8 2Y | 9 2A | 10 2B | 11 2E | 12 2C | 13 2D | 14 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 9<br>$T_C$ = +25°C | $t_{PHL}$ | 3003<br>Fig. 4 | 106<br>107 | IN | | | | | OUT | GND<br>" | OUT | IN | | | | | 5.0 V<br>" | 1A to 1Y<br>2A to 2Y | 15<br>15 | 40<br>40 | ns<br>" |
| | $t_{PLH}$ | "<br>" | 108<br>109 | IN | | | | | OUT | "<br>" | OUT | IN | | | | | "<br>" | 1A to 1Y<br>2A to 2Y | 25<br>25 | 80<br>80 | "<br>" |
| 10<br>$T_C$ = +125°C | $t_{PHL}$ | "<br>" | 110<br>111 | IN | | | | | OUT | "<br>" | OUT | IN | | | | | "<br>" | 1A to 1Y<br>2A to 2Y | 15<br>15 | 50<br>50 | "<br>" |
| | $t_{PLH}$ | "<br>" | 112<br>113 | IN | | | | | OUT | "<br>" | OUT | IN | | | | | "<br>" | 1A to 1Y<br>2A to 2Y | 45<br>45 | 140<br>140 | "<br>" |
| 11<br>$T_C$ = -55°C | $t_{PHL}$ | "<br>" | 114<br>115 | IN | | | | | OUT | "<br>" | OUT | IN | | | | | "<br>" | 1A to 1Y<br>2A to 2Y | 20<br>20 | 50<br>50 | "<br>" |
| | $t_{PLH}$ | "<br>" | 116<br>117 | IN | | | | | OUT | "<br>" | OUT | IN | | | | | "<br>" | 1A to 1Y<br>2A to 2Y | 25<br>25 | 72<br>72 | "<br>" |

1/ Pins not designated may be HIGH level logic, LOW level logic, or open.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 1A | 1B | 1E | 1C | 1D | 1Y | GND | 2Y | 2A | 2B | 2E | 2C | 2D | $V_{CC}$ | | | | |
| 1<br>$T_C$ = +25°C | $V_{OL}$ | 3007<br>3007 | 1<br>2 | 1.9 V | 1.9 V | | 1.9 V | 1.9 V | 36 mA | GND<br>" | 36 mA | 1.9 V | 1.9 V | | 1.9 V | 1.9 V | 4.5 V<br>" | 1Y<br>2Y | | 0.4<br>0.4 | V<br>" |
| | $I_{IH1}$ | 3010<br>"<br>"<br>"<br>"<br>"<br>" | 3<br>4<br>5<br>6<br>7<br>8<br>9<br>10 | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | | 2.0<br>"<br>"<br>"<br>"<br>"<br>"<br>" | µA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{IL}$ | 3009<br>"<br>"<br>"<br>"<br>"<br>" | 11<br>12<br>13<br>14<br>15<br>16<br>17<br>18 | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | -0.6<br>"<br>"<br>"<br>"<br>"<br>"<br>" | -1.50<br>"<br>"<br>"<br>"<br>"<br>"<br>" | mA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{CEX}$ | | 19<br>20<br>21<br>22<br>23<br>24<br>25<br>26<br>27<br>28 | 1.1 V | 1.1 V | 1.8 V | 1.1 V | 1.1 V | 4.5 V<br>"<br>"<br>4.5 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 4.5 V<br>"<br>" | 1.1 V | 1.1 V | 1.8 V | 1.1 V | 1.1 V | 1.1 V | 4.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1Y<br>1Y<br>1Y<br>1Y<br>2Y<br>2Y<br>2Y<br>2Y<br>1Y<br>2Y | | 50<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | µA<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{CCL}$ | 3005 | 29 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 20 | mA |
| | $I_{CCH1}$ | " | 30 | GND | | | | | | " | | GND | | | | | 5.0 V | $V_{CC}$ | | 2.94 | " |
| | $I_{CCH2}$ | " | 31 | GND | | | | | | " | | GND | | | | | 8.0 V | $V_{CC}$ | | 6.0 | " |

See footnote at end of device type 02.



Source: https://assist.dla.mil -- Downloaded: 2026/0-21T13:02
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 1A | 1B | 1E | 1C | 1D | 1Y | GND | 2Y | 2A | 2B | 2E | 2C | 2D | $V_{CC}$ | | | | |
| 2<br>$T_C$ = +125°C | $V_{OL}$ | 3007<br>3007 | 32<br>33 | 1.7 V | 1.7 V | | 1.7 V | 1.7 V | 36 mA | GND<br>" | 36 mA | 1.7 V | 1.7 V | | 1.7 V | 1.7 V | 4.5 V<br>4.5 V | 1Y<br>2Y | | 0.45<br>0.45 | V<br>V |
| | $I_{IH1}$ | 3010<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 34<br>35<br>36<br>37<br>38<br>39<br>40<br>41 | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | | 5.0<br>"<br>"<br>"<br>"<br>"<br>"<br>" | µA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{IL}$ | 3009<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 42<br>43<br>44<br>45<br>46<br>47<br>48<br>49 | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | -0.6<br>"<br>"<br>"<br>"<br>"<br>"<br>" | -1.50<br>"<br>"<br>"<br>"<br>"<br>"<br>" | mA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{CEX}$ | | 50<br>51<br>52<br>53<br>54<br>55<br>56<br>57<br>58<br>59 | 0.8 V | 0.8 V | 1.3 V | 0.8 V | 0.8 V | 4.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 4.5 V<br>"<br>"<br>"<br>4.5 V | 0.8 V | 0.8 V | 1.3 V | 0.8 V | 0.8 V | 4.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1Y<br>1Y<br>1Y<br>1Y<br>2Y<br>2Y<br>2Y<br>2Y<br>1Y<br>2Y | | 50<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | µA<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{CCL}$ | 3005 | 60 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 20 | mA |
| | $I_{CCH1}$ | " | 61 | GND | | | | | | " | | GND | | | | | 5.0 V | $V_{CC}$ | | 2.94 | " |
| | $I_{CCH2}$ | " | 62 | GND | | | | | | " | | GND | | | | | 8.0 V | $V_{CC}$ | | 6.0 | " |





Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 1A | 2 1B | 3 1E | 4 1C | 5 1D | 6 1Y | 7 GND | 8 2Y | 9 2A | 10 2B | 11 2E | 12 2C | 13 2D | 14 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 3<br>$T_C$ = -55°C | $V_{OL}$ | 3007<br>3007 | 63<br>64 | 2.1 V | 2.1 V | | 2.1 V | 2.1 V | 36 mA | GND<br>" | 36 mA | 2.1 V | 2.1 V | | 2.1 V | 2.1 V | 4.5 V<br>4.5 V | 1Y<br>2Y | | 0.4<br>0.4 | V<br>V |
| | $I_{IH1}$ | 3010<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 65<br>66<br>67<br>68<br>69<br>70<br>71<br>72 | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 4.0 V<br>GND<br>"<br>" | GND<br>4.0 V<br>GND<br>GND | | GND<br>GND<br>4.0 V<br>GND | GND<br>"<br>"<br>4.0 V | 5.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | | 2.0<br>"<br>"<br>"<br>"<br>"<br>"<br>" | μA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{IL}$ | 3009<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 73<br>74<br>75<br>76<br>77<br>78<br>79<br>80 | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | | 0.4 V<br>4.0 V<br>"<br>" | 4.0 V<br>0.4 V<br>4.0 V<br>4.0 V | | 4.0 V<br>4.0 V<br>0.4 V<br>4.0 V | 4.0 V<br>"<br>"<br>0.4 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1A<br>1B<br>1C<br>1D<br>2A<br>2B<br>2C<br>2D | -0.6<br>"<br>"<br>"<br>"<br>"<br>"<br>" | -1.50<br>"<br>"<br>"<br>"<br>"<br>"<br>" | mA<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{CEX}$ | | 81<br>82<br>83<br>84<br>85<br>86<br>87<br>88<br>89<br>90 | 1.4 V | 1.4 V | 2.1 V | 1.4 V | 1.4 V | 4.5 V<br>"<br>"<br>"<br>4.5 V | "<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 4.5 V<br>"<br>"<br>4.5 V | 1.4 V | 1.4 V | 2.1 V | 1.4 V | 1.4 V | 4.5 V<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | 1Y<br>1Y<br>1Y<br>1Y<br>2Y<br>2Y<br>2Y<br>2Y<br>1Y<br>2Y | | 50<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" | μA<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>"<br>" |
| | $I_{CCL}$ | 3005 | 91 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 20 | mA |
| | $I_{CCH1}$ | " | 92 | GND | | | | | | " | | GND | | | | | 5.0 V | $V_{CC}$ | | 2.94 | " |
| | $I_{CCH2}$ | " | 93 | GND | | | | | | " | | GND | | | | | 8.0 V | $V_{CC}$ | | 6.0 | " |





Source: https://assist.dla.mil -- Downloaded: 20260-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued 1/.

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 1A | 1B | 1E | 1C | 1D | 1Y | GND | 2Y | 2A | 2B | 2E | 2C | 2D | $V_{CC}$ | | | | |
| 9 $T_C$ = +25°C | $t_{PHL}$ | 3003 Fig. 4 | 94 | IN | | | | | OUT | GND | OUT | IN | | | | | 5.0 V | 1A to 1Y | 10 | 35 | ns |
| | | | 95 | | | | | | | " | | | | | | | " | 2A to 2Y | 10 | 35 | " |
| | $t_{PLH}$ | " | 96 | IN | | | | | OUT | " | OUT | IN | | | | | " | 1A to 1Y | 15 | 50 | " |
| | | " | 97 | | | | | | | " | | | | | | | " | 2A to 2Y | 15 | 50 | " |
| 10 $T_C$ = +125°C | $t_{PHL}$ | " | 98 | IN | | | | | OUT | " | OUT | IN | | | | | " | 1A to 1Y | 10 | 45 | " |
| | | " | 99 | | | | | | | " | | | | | | | " | 2A to 2Y | 10 | 45 | " |
| | $t_{PLH}$ | " | 100 | IN | | | | | OUT | " | OUT | IN | | | | | " | 1A to 1Y | 30 | 120 | " |
| | | " | 101 | | | | | | | " | | | | | | | " | 2A to 2Y | 30 | 120 | " |
| 11 $T_C$ = -55°C | $t_{PHL}$ | " | 102 | IN | | | | | OUT | " | OUT | IN | | | | | " | 1A to 1Y | 15 | 45 | " |
| | | " | 103 | | | | | | | " | | | | | | | " | 2A to 2Y | 15 | 45 | " |
| | $t_{PLH}$ | " | 104 | IN | | | | | OUT | " | OUT | IN | | | | | " | 1A to 1Y | 10 | 35 | " |
| | | " | 105 | | | | | | | " | | | | | | | " | 2A to 2Y | 10 | 35 | " |

1/ Pins not designated may be HIGH level logic, LOW level logic, or open.





Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 1A | 2 1B | 3 1Y | 4 2Y | 5 2A | 6 2B | 7 GND | 8 3A | 9 3B | 10 3Y | 11 4Y | 12 4A | 13 4B | 14 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $V_{OL}$ | 3007 | 1 | 1.9 V | 1.9 V | 36 mA | | | | GND | | | | | | | 4.5 V | 1Y | | 0.4 | V |
| | | " | 2 | | | | 36 mA | 1.9 V | 1.9 V | " | 1.9 V | 1.9 V | 36 mA | | 1.9 V | 1.9 V | " | 2Y | | " | " |
| | | " | 3 | | | | | | | " | | | | 36 mA | | | " | 3Y | | " | " |
| | | " | 4 | | | | | | | " | | | | | | | " | 4Y | | " | " |
| | $V_{OH}$ | 3006 | 5 | 1.1 V | | -2.5 mA | | | | " | | | | | | | " | 1Y | 3.4 | | " |
| | | " | 6 | | 1.1 V | -2.5 mA | | | | " | | | | | | | " | 1Y | " | | " |
| | | " | 7 | | | | -2.5 mA | 1.1 V | | " | | | | | | | " | 2Y | " | | " |
| | | " | 8 | | | | -2.5 mA | | 1.1 V | " | | | | | | | " | 2Y | " | | " |
| | | " | 9 | | | | | | | " | 1.1 V | | | | | | " | 3Y | " | | " |
| | | " | 10 | | | | | | | " | | 1.1 V | -2.5 mA | | | | " | 3Y | " | | " |
| | | " | 11 | | | | | | | " | | | -2.5 mA | | | | " | 4Y | " | | " |
| | | " | 12 | | | | | | | " | | | | 1.1 V | | | " | 4Y | " | | " |
| | | | | | | | | | | | | | | | | 1.1 V | | | | | |
| | $I_{OS}$ | 3011 | 13 | GND | | GND | | | | " | | | | | | | 5.5 V | 1Y | -18 | | mA |
| | | " | 14 | | | | GND | GND | | " | | | | | | | " | 2Y | " | | " |
| | | " | 15 | | | | | | | " | GND | | GND | | | | " | 3Y | " | | " |
| | | " | 16 | | | | | | | " | | | | GND | GND | | " | 4Y | " | | " |
| | $I_{IH1}$ | 3010 | 17 | 4.0 V | GND | | | | | " | | | | | | | " | 1A | 0 | 2.0 | μA |
| | | " | 18 | GND | 4.0 V | | | | | " | | | | | | | " | 1B | " | " | " |
| | | " | 19 | | | | | 4.0 V | GND | " | | | | | | | " | 2A | " | " | " |
| | | " | 20 | | | | | GND | 4.0 V | " | | | | | | | " | 2B | " | " | " |
| | | " | 21 | | | | | | | " | 4.0 V | GND | | | | | " | 3A | " | " | " |
| | | " | 22 | | | | | | | " | GND | 4.0 V | | | | | " | 3B | " | " | " |
| | | " | 23 | | | | | | | " | | | | | 4.0 V | GND | " | 4A | " | " | " |
| | | " | 24 | | | | | | | " | | | | | GND | 4.0 V | " | 4B | " | " | " |
| | $I_{IL}$ | 3009 | 25 | 0.4 V | 4.0 V | | | | | " | | | | | | | " | 1A | -0.6 | -1.50 | mA |
| | | " | 26 | 4.0 V | 0.4 V | | | | | " | | | | | | | " | 1B | " | " | " |
| | | " | 27 | | | | | 0.4 V | 4.0 V | " | | | | | | | " | 2A | " | " | " |
| | | " | 28 | | | | | 4.0 V | 0.4 V | " | | | | | | | " | 2B | " | " | " |
| | | " | 29 | | | | | | | " | 0.4 V | 4.0 V | | | | | " | 3A | " | " | " |
| | | " | 30 | | | | | | | " | 4.0 V | 0.4 V | | | | | " | 3B | " | " | " |
| | | " | 31 | | | | | | | " | | | | | 0.4 V | 4.0 V | " | 4A | " | " | " |
| | | " | 32 | | | | | | | " | | | | | 4.0 V | 0.4 V | " | 4B | " | " | " |
| | $I_{CEX}$ | | 33 | 1.1 V | | 4.5 V | | | | " | | | | | | | 4.5 V | 1Y | 0 | 50 | μA |
| | | | 34 | | | | 4.5 V | 1.1 V | | " | | | | | | | " | 2Y | " | " | " |
| | | | 35 | | | | | | | " | 1.1 V | | 4.5 V | | | | " | 3Y | " | " | " |
| | | | 36 | | | | | | | " | | | | 4.5 V | 1.1 V | | " | 4Y | " | " | " |
| | $I_{CCL}$ | 3005 | 37 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 53.2 | mA |
| | $I_{CCH1}$ | " | 38 | GND | | | | GND | | " | GND | | | | GND | | 5.0 V | $V_{CC}$ | | 5.88 | " |
| | $I_{CCH2}$ | " | 39 | GND | | | | GND | | " | GND | | | | GND | | 8.0 V | $V_{CC}$ | | 12.0 | " |





Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 1A | 2 1B | 3 1Y | 4 2Y | 5 2A | 6 2B | 7 GND | 8 3A | 9 3B | 10 3Y | 11 4Y | 12 4A | 13 4B | 14 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2<br>$T_C$ = +125°C | $V_{OL}$ | 3007 | 40 | 1.7 V | 1.7 V | 36 mA | | | | GND | | | | | | | 4.5 V | 1Y | | 0.45 | V |
| | | " | 41 | | | | 35 mA | 1.7 V | 1.7 V | " | | | | | | | " | 2Y | | " | " |
| | | " | 42 | | | | | | | " | 1.7 V | 1.7 V | 36 mA | | | | " | 3Y | | " | " |
| | | " | 43 | | | | | | | " | | | | 36 mA | 1.7 V | 1.7 V | " | 4Y | | " | " |
| | $V_{OH}$ | 3006 | 44 | 0.8 V | | -4 mA | | | | " | | | | | | | " | 1Y | 3.3 | | " |
| | | " | 45 | | 0.8 V | -4 mA | | | | " | | | | | | | " | 1Y | " | | " |
| | | " | 46 | | | | -4 mA | 0.8 V | | " | | | | | | | " | 2Y | " | | " |
| | | " | 47 | | | | -4 mA | | 0.8 V | " | | | | | | | " | 2Y | " | | " |
| | | " | 48 | | | | | | | " | 0.8 V | | -4 mA | | | | " | 3Y | " | | " |
| | | " | 49 | | | | | | | " | | 0.8 V | -4 mA | | | | " | 3Y | " | | " |
| | | " | 50 | | | | | | | " | | | | -4 mA | 0.8 V | | " | 4Y | " | | " |
| | | " | 51 | | | | | | | " | | | | -4 mA | | 0.8 V | " | 4Y | " | | " |
| | $I_{OS}$ | 3011 | 52 | GND | | GND | | | | " | | | | | | | 5.5 V | 1Y | 16 | | mA |
| | | " | 53 | | | | GND | GND | | " | | | | | | | " | 2Y | " | | " |
| | | " | 54 | | | | | | | " | GND | | GND | | | | " | 3Y | " | | " |
| | | " | 55 | | | | | | | " | | | | GND | GND | | " | 4Y | " | | " |
| | $I_{IH1}$ | 3010 | 56 | 4.0 V | GND | | | | | " | | | | | | | " | 1A | 0 | 2.0 | µA |
| | | " | 57 | GND | 4.0 V | | | | | " | | | | | | | " | 1B | " | " | " |
| | | " | 58 | | | | | 4.0 V | GND | " | | | | | | | " | 2A | " | " | " |
| | | " | 59 | | | | | GND | 4.0 V | " | | | | | | | " | 2B | " | " | " |
| | | " | 60 | | | | | | | " | 4.0 V | GND | | | | | " | 3A | " | " | " |
| | | " | 61 | | | | | | | " | GND | 4.0 V | | | | | " | 3B | " | " | " |
| | | " | 62 | | | | | | | " | | | | | 4.0 V | GND | " | 4A | " | " | " |
| | | " | 63 | | | | | | | " | | | | | GND | 4.0 V | " | 4B | " | " | " |
| | $I_{IL}$ | 3009 | 64 | 0.4 V | 4.0 V | | | | | " | | | | | | | " | 1A | -0.6 | -1.50 | mA |
| | | " | 65 | 4.0 V | 0.4 V | | | | | " | | | | | | | " | 1B | " | " | " |
| | | " | 66 | | | | | 0.4 V | 4.0 V | " | | | | | | | " | 2A | " | " | " |
| | | " | 67 | | | | | 4.0 V | 0.4 V | " | | | | | | | " | 2B | " | " | " |
| | | " | 68 | | | | | | | " | 0.4 V | 4.0 V | | | | | " | 3A | " | " | " |
| | | " | 69 | | | | | | | " | 4.0 V | 0.4 V | | | | | " | 3B | " | " | " |
| | | " | 70 | | | | | | | " | | | | | 0.4 V | 4.0 V | " | 4A | " | " | " |
| | | " | 71 | | | | | | | " | | | | | 4.0 V | 0.4 V | " | 4B | " | " | " |
| | $I_{CEX}$ | | 72 | 0.8 V | | 4.5 V | | | | " | | | | | | | 4.5 V | 1Y | 0 | 50 | µA |
| | | | 73 | | | | 4.5 V | 0.8 V | | " | | | | | | | " | 2Y | " | " | " |
| | | | 74 | | | | | | | " | 0.8 V | | 4.5 V | | | | " | 3Y | " | " | " |
| | | | 75 | | | | | | | " | | | | 4.5 V | 0.8 V | | " | 4Y | " | " | " |
| | $I_{CCL}$ | 3005 | 76 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 5.32 | mA |
| | $I_{CCH1}$ | " | 77 | GND | | | | GND | | " | GND | | | | GND | | 5.0 V | $V_{CC}$ | | 5.88 | " |
| | $I_{CCH2}$ | " | 78 | GND | | | | GND | | " | GND | | | | GND | | 8.0 V | $V_{CC}$ | | 12.0 | " |





Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 1A | 1B | 1Y | 2Y | 2A | 2B | GND | 3A | 3B | 3Y | 4Y | 4A | 4B | $V_{CC}$ | | | | |
| 3<br>$T_C$ = -55°C | $V_{OL}$ | 3007 | 79 | 2.1 V | 2.1 V | 36 mA | | | | GND | | | | | | | 4.5 V | 1Y | | 0.4 | V |
| | | " | 80 | | | | 36 mA | 2.1 V | 2.1 V | " | 2.1 V | 2.1 V | 36 mA | | | | " | 2Y | | " | " |
| | | " | 81 | | | | | | | " | | | | 36 mA | 2.1 V | 2.1 V | " | 3Y | | " | " |
| | | " | 82 | | | | | | | " | | | | | | | " | 4Y | | " | " |
| | $V_{OH}$ | 3006 | 83 | 1.4 V | | -2 mA | | | | " | | | | | | | " | 1Y | 3.3 | | " |
| | | " | 84 | | 1.4 V | -2 mA | | | | " | | | | | | | " | 1Y | " | | " |
| | | " | 85 | | | | -2 mA | 1.4 V | 1.4 V | " | | | | | | | " | 2Y | " | | " |
| | | " | 86 | | | | -2 mA | | | " | | | | | | | " | 2Y | " | | " |
| | | " | 87 | | | | | | | " | 1.4 V | | -2 mA | | | | " | 3Y | " | | " |
| | | " | 88 | | | | | | | " | | 1.4 V | -2 mA | | | | " | 3Y | " | | " |
| | | " | 89 | | | | | | | " | | | | -2 mA | 1.4 V | | " | 4Y | " | | " |
| | | " | 90 | | | | | | | " | | | | -2 mA | | 1.4 V | " | 4Y | " | | " |
| | $I_{OS}$ | 3011 | 91 | GND | | GND | | | | " | | | | | | | 5.5 V | 1Y | 16 | | mA |
| | | " | 92 | | | | GND | GND | | " | | | | | | | " | 2Y | " | | " |
| | | " | 93 | | | | | | | " | GND | | GND | | | | " | 3Y | " | | " |
| | | " | 94 | | | | | | | " | | | | GND | GND | | " | 4Y | " | | " |
| | $I_{IH1}$ | 3010 | 95 | 4.0 V | GND | | | | | " | | | | | | | " | 1A | 0 | 2.0 | µA |
| | | " | 96 | GND | 4.0 V | | | | | " | | | | | | | " | 1B | " | " | " |
| | | " | 97 | | | | | 4.0 V | GND | " | | | | | | | " | 2A | " | " | " |
| | | " | 98 | | | | | GND | 4.0 V | " | | | | | | | " | 2B | " | " | " |
| | | " | 99 | | | | | | | " | 4.0 V | GND | | | | | " | 3A | " | " | " |
| | | " | 100 | | | | | | | " | GND | 4.0 V | | | | | " | 3B | " | " | " |
| | | " | 101 | | | | | | | " | | | | | 4.0 V | GND | " | 4A | " | " | " |
| | | " | 102 | | | | | | | " | | | | | GND | 4.0 V | " | 4B | " | " | " |
| | $I_{IL}$ | 3009 | 103 | 0.4 V | 4.0 V | | | | | " | | | | | | | " | 1A | -0.6 | -1.50 | mA |
| | | " | 104 | 4.0 V | 0.4 V | | | | | " | | | | | | | " | 1B | " | " | " |
| | | " | 105 | | | | | 0.4 V | 4.0 V | " | | | | | | | " | 2A | " | " | " |
| | | " | 106 | | | | | 4.0 V | 0.4 V | " | | | | | | | " | 2B | " | " | " |
| | | " | 107 | | | | | | | " | 0.4 V | 4.0 V | | | | | " | 3A | " | " | " |
| | | " | 108 | | | | | | | " | 4.0 V | 0.4 V | | | | | " | 3B | " | " | " |
| | | " | 109 | | | | | | | " | | | | | 0.4 V | 4.0 V | " | 4A | " | " | " |
| | | " | 110 | | | | | | | " | | | | | 4.0 V | 0.4 V | " | 4B | " | " | " |
| | $I_{CEX}$ | | 111 | 1.4 V | | 4.5 V | | | | " | | | | | | | 4.5 V | 1Y | 0 | 50 | µA |
| | | | 112 | | | | 4.5 V | 1.4 V | | " | | | | | | | " | 2Y | " | " | " |
| | | | 113 | | | | | | | " | 1.4 V | | 4.5 V | | | | " | 3Y | " | " | " |
| | | | 114 | | | | | | | " | | | | 4.5 V | 1.4 V | | " | 4Y | " | " | " |
| | $I_{CCL}$ | 3005 | 115 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 53.2 | mA |
| | $I_{CCH1}$ | " | 116 | GND | | | | | | " | GND | | | | GND | | 5.0 V | $V_{CC}$ | | 5.88 | " |
| | $I_{CCH2}$ | " | 117 | GND | | | | | | " | GND | | | | GND | | 8.0 V | $V_{CC}$ | | 12.0 | " |

See footnote at end of table.



Source: https://assist.dla.mil -- Downloaded: 2026-01-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued 1/.

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 1A | 1B | 1Y | 2Y | 2A | 2B | GND | 3A | 3B | 3Y | 4Y | 4A | 4B | $V_{CC}$ | | | | |
| 9 $T_C$ = +25°C | $t_{PHL}$ | 3003 Fig. 4 | 118 | IN | | OUT | | | | GND | | | | | | | 5.0 V | 1A to 1Y | 15 | 40 | ns |
| | | " | 119 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 120 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 121 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| | $t_{PLH}$ | " | 122 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 25 | 80 | " |
| | | " | 123 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 124 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 125 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| 10 $T_C$ = +125°C | $t_{PHL}$ | " | 126 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 15 | 50 | " |
| | | " | 127 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 128 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 129 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| | $t_{PLH}$ | " | 130 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 45 | 140 | " |
| | | " | 131 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 132 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 133 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| 11 $T_C$ = -55°C | $t_{PHL}$ | " | 134 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 20 | 50 | " |
| | | " | 135 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 136 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 137 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| | $t_{PLH}$ | " | 138 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 25 | 72 | " |
| | | " | 139 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 140 | | | | | | | " | IN | | OUT | | | | " | 3A to 3B | " | " | " |
| | | " | 141 | | | | | | | " | | | | OUT | IN | | " | 4A to 4B | " | " | " |

1/ Pins not designated may be HIGH level logic, LOW level logic, or open.



Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 1A | 2 1B | 3 1Y | 4 2Y | 5 2A | 6 2B | 7 GND | 8 3A | 9 3B | 10 3Y | 11 4Y | 12 4A | 13 4B | 14 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 $T_C$ = +25°C | $V_{OL}$ | 3007 | 1 | 1.9 V | 1.9 V | 36 mA | | | | GND | | | | | | | 4.5 V | 1Y | | 0.4 | V |
| | | " | 2 | | | | 36 mA | 1.9 V | 1.9 V | " | | | | | | | " | 2Y | | " | " |
| | | " | 3 | | | | | | | " | 1.9 V | 1.9 V | 36 mA | | | | " | 3Y | | " | " |
| | | " | 4 | | | | | | | " | | | | 36 mA | 1.9 V | 1.9 V | " | 4Y | | " | " |
| | $I_{IH1}$ | 3010 | 5 | 4.0 V | GND | | | | | " | | | | | | | 5.5 V | 1A | | 2.0 | μA |
| | | " | 6 | GND | 4.0 V | | | | | " | | | | | | | " | 1B | | " | " |
| | | " | 7 | | | | | 4.0 V | GND | " | | | | | | | " | 2A | | " | " |
| | | " | 8 | | | | | GND | 4.0 V | " | | | | | | | " | 2B | | " | " |
| | | " | 9 | | | | | | | " | 4.0 V | GND | | | | | " | 3A | | " | " |
| | | " | 10 | | | | | | | " | GND | 4.0 V | | | | | " | 3B | | " | " |
| | | " | 11 | | | | | | | " | | | | | 4.0 V | GND | " | 4A | | " | " |
| | | " | 12 | | | | | | | " | | | | | GND | 4.0 V | " | 4B | | " | " |
| | $I_{IL}$ | 3009 | 13 | 0.4 V | 4.0 V | | | | | " | | | | | | | " | 1A | -0.6 | -1.50 | mA |
| | | " | 14 | 4.0 V | 0.4 V | | | | | " | | | | | | | " | 1B | " | " | " |
| | | " | 15 | | | | | 0.4 V | 4.0 V | " | | | | | | | " | 2A | " | " | " |
| | | " | 16 | | | | | 4.0 V | 0.4 V | " | | | | | | | " | 2B | " | " | " |
| | | " | 17 | | | | | | | " | 0.4 V | 4.0 V | | | | | " | 3A | " | " | " |
| | | " | 18 | | | | | | | " | 4.0 V | 0.4 V | | | | | " | 3B | " | " | " |
| | | " | 19 | | | | | | | " | | | | | 0.4 V | 4.0 V | " | 4A | " | " | " |
| | | " | 20 | | | | | | | " | | | | | 4.0 V | 0.4 V | " | 4B | " | " | " |
| | $I_{CEX}$ | | 21 | 1.1 V | | 4.5 V | | | | " | | | | | | | 4.5 V | 1Y | 0 | 50 | μA |
| | | | 22 | | | | 4.5 V | 1.1 V | | " | | | | | | | " | 2Y | " | " | " |
| | | | 23 | | | | | | | " | 1.1 V | | 4.5 V | | | | " | 3Y | " | " | " |
| | | | 24 | | | | | | | " | | | | 4.5 V | 1.1 V | | " | 4Y | " | " | " |
| | $I_{CCL}$ | 3005 | 25 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 40 | mA |
| | $I_{CCH1}$ | " | 26 | GND | | | | GND | | " | GND | | | | GND | | 5.0 V | $V_{CC}$ | | 5.88 | " |
| | $I_{CCH2}$ | " | 27 | GND | | | | GND | | " | GND | | | | GND | | 8.0 V | $V_{CC}$ | | 12.0 | " |

See footnote at end of table.





Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 1A | 2 1B | 3 1Y | 4 2Y | 5 2A | 6 2B | 7 GND | 8 3A | 9 3B | 10 3Y | 11 4Y | 12 4A | 13 4B | 14 $V_{CC}$ | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 2<br>$T_C$ = +125°C | $V_{OL}$ | 3007 | 28 | 1.7 V | 1.7 V | 36 mA | | | | GND | | | | | | | 4.5 V | 1Y | | 0.45 | V |
| | | " | 29 | | | | 36 mA | 1.7 V | 1.7 V | " | | | | | | | " | 2Y | | " | " |
| | | " | 30 | | | | | | | " | 1.7 V | 1.7 V | 36 mA | | | | " | 3Y | | " | " |
| | | " | 31 | | | | | | | " | | | | 36 mA | 1.7 V | 1.7 V | " | 4Y | | " | " |
| | $I_{IH1}$ | 3010 | 32 | 4.0 V | GND | | | | | " | | | | | | | 5.5 V | 1A | | 5.0 | µA |
| | | " | 33 | GND | 4.0 V | | | | | " | | | | | | | " | 1B | | " | " |
| | | " | 34 | | | | | 4.0 V | GND | " | | | | | | | " | 2A | | " | " |
| | | " | 35 | | | | | GND | 4.0 V | " | | | | | | | " | 2B | | " | " |
| | | " | 36 | | | | | | | " | 4.0 V | GND | | | | | " | 3A | | " | " |
| | | " | 37 | | | | | | | " | GND | 4.0 V | | | | | " | 3B | | " | " |
| | | " | 38 | | | | | | | " | | | | | 4.0 V | GND | " | 4A | | " | " |
| | | " | 39 | | | | | | | " | | | | | GND | 4.0 V | " | 4B | | " | " |
| | $I_{IL}$ | 3009 | 40 | 0.4 V | 4.0 V | | | | | " | | | | | | | " | 1A | -0.6 | -1.50 | mA |
| | | " | 41 | 4.0 V | 0.4 V | | | | | " | | | | | | | " | 1B | " | " | " |
| | | " | 42 | | | | | 0.4 V | 4.0 V | " | | | | | | | " | 2A | " | " | " |
| | | " | 43 | | | | | 4.0 V | 0.4 V | " | | | | | | | " | 2B | " | " | " |
| | | " | 44 | | | | | | | " | 0.4 V | 4.0 V | | | | | " | 3A | " | " | " |
| | | " | 45 | | | | | | | " | 4.0 V | 0.4 V | | | | | " | 3B | " | " | " |
| | | " | 46 | | | | | | | " | | | | | 0.4 V | 4.0 V | " | 4A | " | " | " |
| | | " | 47 | | | | | | | " | | | | | 4.0 V | 0.4 V | " | 4B | " | " | " |
| | $I_{CEX}$ | | 48 | 0.8 V | | 4.5 V | | | | " | | | | | | | 4.5 V | 1Y | 0 | 50 | µA |
| | | | 49 | | | | 4.5 V | 0.8 V | | " | | | | | | | " | 2Y | " | " | " |
| | | | 50 | | | | | | | " | 0.8 V | | 4.5 V | | | | " | 3Y | " | " | " |
| | | | 51 | | | | | | | " | | | | 4.5 V | 0.8 V | | " | 4Y | " | " | " |
| | $I_{CCL}$ | 3005 | 52 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 40 | mA |
| | $I_{CCH1}$ | " | 53 | GND | | | | GND | | " | GND | | | | GND | | 5.0 V | $V_{CC}$ | | 5.88 | " |
| | $I_{CCH2}$ | " | 54 | GND | | | | GND | | " | GND | | | | GND | | 8.0 V | $V_{CC}$ | | 12.0 | " |





Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued. 1/

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 1A | 1B | 1Y | 2Y | 2A | 2B | GND | 3A | 3B | 3Y | 4Y | 4A | 4B | $V_{CC}$ | | | | |
| 3<br>$T_C$ = -55°C | $V_{OL}$ | 3007 | 55 | 2.1 V | 2.1 V | 36 mA | 36 mA | 2.1 V | 2.1 V | GND | 2.1 V | 2.1 V | 36 mA | 36 mA | 2.1 V | 2.1 V | 4.5 V | 1Y | | 0.4 | V |
| | | " | 56 | | | | | | | " | | | | | | | " | 2Y | | " | " |
| | | " | 57 | | | | | | | " | | | | | | | " | 3Y | | " | " |
| | | " | 58 | | | | | | | " | | | | | | | " | 4Y | | " | " |
| | $I_{IH1}$ | 3010 | 59 | 4.0 V | GND | | | 4.0 V | GND | " | 4.0 V | GND | | | 4.0 V | GND | 5.5 V | 1A | | 2.0 | µA |
| | | " | 60 | GND | 4.0 V | | | GND | 4.0 V | " | GND | 4.0 V | | | GND | 4.0 V | " | 1B | | " | " |
| | | " | 61 | | | | | | | " | | | | | | | " | 2A | | " | " |
| | | " | 62 | | | | | | | " | | | | | | | " | 2B | | " | " |
| | | " | 63 | | | | | | | " | | | | | | | " | 3A | | " | " |
| | | " | 64 | | | | | | | " | | | | | | | " | 3B | | " | " |
| | | " | 65 | | | | | | | " | | | | | | | " | 4A | | " | " |
| | | " | 66 | | | | | | | " | | | | | | | " | 4B | | " | " |
| | $I_{IL}$ | 3009 | 67 | 0.4 V | 4.0 V | | | 0.4 V | 4.0 V | " | 0.4 V | 4.0 V | | | 0.4 V | 4.0 V | " | 1A | -0.6 | -1.50 | mA |
| | | " | 68 | 4.0 V | 0.4 V | | | 4.0 V | 0.4 V | " | 4.0 V | 0.4 V | | | 4.0 V | 0.4 V | " | 1B | " | " | " |
| | | " | 69 | | | | | | | " | | | | | | | " | 2A | " | " | " |
| | | " | 70 | | | | | | | " | | | | | | | " | 2B | " | " | " |
| | | " | 71 | | | | | | | " | | | | | | | " | 3A | " | " | " |
| | | " | 72 | | | | | | | " | | | | | | | " | 3B | " | " | " |
| | | " | 73 | | | | | | | " | | | | | | | " | 4A | " | " | " |
| | | " | 74 | | | | | | | " | | | | | | | " | 4B | " | " | " |
| | $I_{CEX}$ | | 75 | 1.4 V | | 4.5 V | 4.5 V | 1.4 V | | " | 1.4 V | | 4.5 V | 4.5 V | 1.4 V | | 4.5 V | 1Y | 0 | 50 | µA |
| | | | 76 | | | | | | | " | | | | | | | " | 2Y | " | " | " |
| | | | 77 | | | | | | | " | | | | | | | " | 3Y | " | " | " |
| | | | 78 | | | | | | | " | | | | | | | " | 4Y | " | " | " |
| | $I_{CCL}$ | 3005 | 79 | | | | | | | " | | | | | | | 5.0 V | $V_{CC}$ | | 40 | mA |
| | $I_{CCH1}$ | " | 80 | GND | | | | GND | | " | GND | | | | GND | | 5.0 V | $V_{CC}$ | | 5.88 | " |
| | $I_{CCH2}$ | " | 81 | GND | | | | GND | | " | GND | | | | GND | | 8.0 V | $V_{CC}$ | | 12.0 | " |

See footnote at end of table.





Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 04 - Continued 1/.

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | 1A | 1B | 1Y | 2Y | 2A | 2B | GND | 3A | 3B | 3Y | 4Y | 4A | 4B | $V_{CC}$ | | | | |
| 9 $T_C$ = +25°C | $t_{PHL}$ | 3003 Fig. 4 | 82 | IN | | OUT | | | | GND | | | | | | | 5.0 V | 1A to 1Y | 10 | 35 | ns |
| | | " | 83 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 84 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 85 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| | $t_{PLH}$ | " | 86 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 15 | 50 | " |
| | | " | 87 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 88 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 89 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| 10 $T_C$ = +125°C | $t_{PHL}$ | " | 90 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 10 | 45 | " |
| | | " | 91 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 92 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 93 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| | $t_{PLH}$ | " | 94 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 30 | 120 | " |
| | | " | 95 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 96 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 97 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| 11 $T_C$ = -55°C | $t_{PHL}$ | " | 98 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 15 | 45 | " |
| | | " | 99 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 100 | | | | | | | " | IN | | OUT | | | | " | 3A to 3Y | " | " | " |
| | | " | 101 | | | | | | | " | | | | OUT | IN | | " | 4A to 4Y | " | " | " |
| | $t_{PLH}$ | " | 102 | IN | | OUT | | | | " | | | | | | | " | 1A to 1Y | 10 | 35 | " |
| | | " | 103 | | | | OUT | IN | | " | | | | | | | " | 2A to 2Y | " | " | " |
| | | " | 104 | | | | | | | " | IN | | OUT | | | | " | 3A to 3B | " | " | " |
| | | " | 105 | | | | | | | " | | | | OUT | IN | | " | 4A to 4B | " | " | " |

1/ Pins not designated may be HIGH level logic, LOW level logic, or open.



Source: https://assist.dla.mil -- Downloaded: 2026-01-21T12:24:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 05 - Continued 1/.

| Subgroup | Symbol | MIL-STD-883 method | Cases A,B,C,D Test no. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | Measured terminal | Limits Min | Limits Max | Unit |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | NC | 1A | 1B | 1Y | 1C | 1D | GND | NC | 2A | 2B | 2Y | 2C | 2D | $V_{CC}$ | | | | |
| 1 $T_C$ = +25°C | $V_F$ | | 1 | | GND | GND | 2 mA | GND | GND | GND | | GND | GND | 2 mA | GND | GND | | 1Y | 70 | 82 | V |
| | | | 2 | | | | " | | | " | | | | " | | | | 1Y | " | " | " |
| | | | 3 | | | | " | | | " | | | | " | | | | 1Y | " | " | " |
| | | | 4 | | | | " | | | " | | | | " | | | | 1Y | " | " | " |
| | | | 5 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | | | 6 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | | | 7 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | | | 8 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | $I_{IH1}$ | 3010 | 9 | | 4.0 V | GND | | GND | GND | " | | | | | | | | 1A | | 2.0 | µA |
| | | " | 10 | | GND | 4.0 V | | GND | " | " | | | | | | | | 1B | | " | " |
| | | " | 11 | | " | GND | | 4.0 V | 4.0 V | " | | | | | | | | 1C | | " | " |
| | | " | 12 | | " | GND | | GND | " | " | | | | | | | | 1D | | " | " |
| | | " | 13 | | | | | | | " | | 4.0 V | GND | | GND | GND | | 2A | | " | " |
| | | " | 14 | | | | | | | " | | " | 4.0 V | | GND | " | | 2B | | " | " |
| | | " | 15 | | | | | | | " | | " | GND | | 4.0 V | " | | 2C | | " | " |
| | | " | 16 | | | | | | | " | | " | GND | | GND | 4.0 V | | 2D | | " | " |
| | $I_{IH2}$ | " | 17 | | | | 4.0 V | | | " | | | | | | | | 1Y | | 10 | " |
| | | " | 18 | | | | | | | " | | | | 4.0 V | | | | 2Y | | 10 | " |
| 2 $T_C$ = +125°C | $V_F$ | | 19 | | GND | GND | 2 mA | GND | GND | " | | GND | GND | 2 mA | GND | GND | | 1Y | 0.5 | .65 | V |
| | | | 20 | | | | " | | | " | | | | " | | | | 1Y | " | " | " |
| | | | 21 | | | | " | | | " | | | | " | | | | 1Y | " | " | " |
| | | | 22 | | | | | | | " | | | | | | | | 1Y | " | " | " |
| | | | 23 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | | | 24 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | | | 25 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | | | 26 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | $I_{IH1}$ | 3010 | 27 | | 4.0 V | GND | | GND | GND | " | | | | | | | | 1A | | 5.0 | µA |
| | | " | 28 | | GND | 4.0 V | | GND | " | " | | | | | | | | 1B | | " | " |
| | | " | 29 | | " | GND | | 4.0 V | 4.0 V | " | | | | | | | | 1C | | " | " |
| | | " | 30 | | " | GND | | GND | " | " | | | | | | | | 1D | | " | " |
| | | " | 31 | | | | | | | " | | 4.0 V | GND | | GND | GND | | 2A | | " | " |
| | | " | 32 | | | | | | | " | | " | 4.0 V | | GND | " | | 2B | | " | " |
| | | " | 33 | | | | | | | " | | " | GND | | 4.0 V | " | | 2C | | " | " |
| | | " | 34 | | | | | | | " | | " | GND | | GND | 4.0 V | | 2D | | " | " |
| | $I_{IH2}$ | " | 35 | | | | 4.0 V | | | " | | | | | | | | 1Y | | 10 | " |
| | | " | 36 | | | | | | | " | | | | 4.0 V | | | | 2Y | | 10 | " |
| 3 $T_C$ = -55°C | $V_F$ | | 37 | | GND | GND | 2 mA | GND | GND | " | | GND | GND | 2 mA | GND | GND | | 1Y | 0.85 | 0.98 | V |
| | | | 38 | | | | " | | | " | | | | " | | | | 1Y | " | " | " |
| | | | 39 | | | | " | | | " | | | | " | | | | 1Y | " | " | " |
| | | | 40 | | | | | | | " | | | | | | | | 1Y | " | " | " |
| | | | 41 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | | | 42 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | | | 43 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | | | 44 | | | | | | | " | | | | | | | | 2Y | " | " | " |
| | $I_{IH1}$ | 3010 | 45 | | 4.0 V | GND | | GND | GND | " | | | | | | | | 1A | | 2.0 | µA |
| | | " | 46 | | GND | 4.0 V | | GND | " | " | | | | | | | | 1B | | " | " |
| | | " | 47 | | " | GND | | 4.0 V | 4.0 V | " | | | | | | | | 1C | | " | " |
| | | " | 48 | | " | GND | | GND | " | " | | | | | | | | 1D | | " | " |
| | | " | 49 | | | | | | | " | | 4.0 V | GND | | GND | GND | | 2A | | " | " |
| | | " | 50 | | | | | | | " | | " | 4.0 V | | GND | " | | 2B | | " | " |
| | | " | 51 | | | | | | | " | | " | GND | | 4.0 V | " | | 2C | | " | " |
| | | " | 52 | | | | | | | " | | " | GND | | GND | 4.0 V | | 2D | | " | " |
| | $I_{IH2}$ | " | 53 | | | | 4.0 V | | | " | | | | | | | | 1Y | | 10 | " |
| | | " | 54 | | | | | | | " | | | | 4.0 V | | | | 2Y | | 10 | " |

1/ Pins not designated may be HIGH level logic, LOW level logic, or open.





Source: https://assist.dla.mil -- Downloaded: 20260-21T13:00Z
Check the source to verify that this is the current version before use.

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, 6, 7, and 8 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical parameters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical test parameters shall be as specified in table II herein.

b. Subgroups 3 and 4 shall be added to the group C inspection requirements for class B devices and shall consist of the tests, conditions, and limits specified for subgroups 10 and 11 of group A.

c. Steady-state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D or E, using the circuit shown on figure 3, or equivalent.

(2) $T_A$ = +125°C minimum.

(3) Test duration: 1,000 hours, except as permitted by appendix B of MIL-M-38510.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883 End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified as follows.

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional current and positive when flowing into the referenced terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging of microcircuits shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Notes. The notes specified in MIL-M-38510 are applicable to this specification.

6.2 Intended use. Microcircuits conforming to this specification are intended for logistic support of existing equipment.

6.3 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

c. Requirements for certificate of compliance, if applicable.

d. Requirements for notification of change of product or process to the contracting activity, if applicable.

e. Requirements for packaging and packing.

f. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements shall not apply to direct purchase by or direct shipment to the Government.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

| | |
|---|---|
| GND | Electrical ground (common terminal) |
| $I_{IN}$ | Current flowing into an input terminal |
| $I_{CEX}$ | Collector cutoff current |
| $V_{IN}$ | Voltage level at an input terminal |

6.5 Logistic support. Lead materials and finishes (see 3.3), are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2) and lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.6 Generic test data. Generic test data may be used to satisfy the requirements of 4.4.3. Group C generic test data shall be on date codes no more than one year old and on a die in the same microcircuit group (see appendix E of MIL-M-38510) with the same material, design and process and from the same plant as the die represented. Group D (see 4.4.4) generic data shall be on date codes no more than one year old and on the same package type (see terms, definitions, and symbols of MIL-M-38510) and from the same plant as the package represented. The vendor is required to retain the generic data for a period of not less than 36 months from the date of shipment.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

| Military device type | Generic-industry type |
|---|---|
| 01 | 932 |
| 02 | 944 |
| 03 | 957 |
| 04 | 958 |
| 05 | 933 |

6.8 Ordering guidance. Since the qualification and certification requirements have been removed from the specification, orders may be placed immediately.

6.9 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.



Source: https://assist.dla.mil -- Downloaded: 202610-21T13:00Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Agent:
DLA - ES

Preparing activity:
Air Force - 17

(Project 5962-0591-3)



Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| MIL-M-38510/31A | MICROCIRCUITS, DIGITAL, DTL, NAND/EXTENDER, MONOLITHIC SILICON |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR<br>☐ USER<br>☐ MANUFACTURER<br>☐ OTHER *(Specify)*: _____ |
| b. ADDRESS *(Street, City, State, ZIP Code)* | |

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE OF SUBMISSION *(YYMMDD)* |

*TO DETACH THIS FORM, CUT ALONG THIS LINE.*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:00Z
Check the source to verify that this is the current version before use.