QUALIFICATION
REQUIREMENTS
REMOVED

MIL-M-38510/32A
9 August 1983
SUPERSEDING
MIL-M-38510/32
17 June 1975

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, DTL, MONOSTABLE MULTIVIBRATOR, MONOLITHIC SILICON

INACTIVE FOR NEW DESIGN AFTER DATE OF THIS REVISION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, DTL, logic microcircuits. One product assurance class and a choice of case outlines and lead finishes are provided and are reflected in the complete part number.

1.2 Part number. The complete part number shall be in accordance with MIL-M-38510 except that the "JAN" or "J" certification shall not be used.

1.2.1 Device type. The device type shall be as follows:

Device type	Circuit
01	Single monostable multivibrator

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
A	F-1 (14-lead, 1/4" x 1/4"), flat package
B	F-3 (14-lead, 3/16" x 1/4"), flat package
C	D-1 (14-lead, 1/4" x 3/4"), dual-in-line package
D	F-2 (14-lead, 1/4" x 3/8"), flat package

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 V dc to +8.0 V dc
Input voltage range	-1.5 V dc to +5.5 V dc
Storage temperature range	-65°C to +150°C
Maximum power dissipation, per gate (P_D)	30 mW dc
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction-to-case (θ_{JC}):	
Cases A, B, and D	0.09°C/mW
Case C	0.08°C/mW
Junction temperature (T_J)	+175°C

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5962

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:00Z
Check the source to verify that this is the current version before use.

1.4 Recommended operating conditions.

Supply voltage range (V_{CC})	+4.5 V dc minimum to +5.5 V dc maximum
Minimum high-level input voltage (V_{IH})	1.9 V dc @ +25°C
Maximum low-level input voltage (V_{IL})	1.1 V dc @ +25°C
Normalized fanout (each output)	10 maximum
Case operating temperature range (T_C)	-55°C to +125°C

1.5 Description. See figure 4.

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510 and herein.

3.2.1 Logic diagram and terminal connections. The logic diagram and terminal connections shall be as specified on figure 1.

3.2.2 Truth table. The truth table shall be as specified on figure 2.

3.2.3 Case outlines. Case outlines shall be as specified in MIL-M-38510 and in 1.2.3 herein.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510 and 1.2 herein. At the option of the manufacturer, marking of the country of origin may be omitted from the body of the microcircuit, but shall be retained on the initial container. The "JAN" or "J" certification mark shall not be used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions 1/	Limits Min	Limits Max	Unit
High-level output voltage	V_{OH}	V_{CC} = 4.5 V I_{OH} = -0.18 mA	3.3		V
Low-level output voltage	V_{OL}	V_{CC} = 4.5 V		0.45	V
Low-level input current	I_{IL1}	V_{CC} = 5.5 V V_{IN} = 0.4 V	-1.6	-3.1	mA
Low-level input current at C_x (pin 11)	I_{IL2}	V_{CC} = 5.5 V V_{IN} = 0.4 V	-3.25	-6.5	mA
High-level input current	I_{IH1}	V_{CC} = 5.5 V V_{IN} = 4.0 V		5	µA
High-level input current at R_I (pin 9)	I_{IH2}	V_{CC} = 5.5 V V_{IN} = 5.5 V	0.45	0.75	mA
High-level supply current	I_{CCH1}	V_{CC} = 5.0 V 2/ V_{IN} = GND		9	mA
High-level supply current	I_{CCH2}	V_{CC} = 8.0 V V_{IN} = GND		20	mA
Propagation delay time high-to-low level output	t_{PHL}	V_{CC} = 5.0 V R_L = 300Ω C_L = 50 pF R_x = 0 C_x = 0 R_I = 5.0 V	5	45	ns
Propagation delay time low-to-high level output	t_{PLH}		5	45	ns
Pulse width of Q output	$t_{P(OUT)1}$	V_{CC} = 5.0 V R_L = 300Ω C_L = 50 pF C_x = 0 R_x = 0 R_I = 5.0 V	75	125	ns
Pulse width of $\overline{Q}$ output	$t_{P(OUT)2}$		70	130	ns
Pulse width of Q output obtained with external timing	$t_{P(OUT)3}$	V_{CC} = 5.0 V R_L = 300Ω C_L = 50 pF C_x = +100 pF R_x = 0 R_I = 5.0 V	405	675	ns
Pulse width of $\overline{Q}$ output obtained with external timing	$t_{P(OUT)4}$		400	680	ns

1/ Complete terminal conditions shall be as specified in table III.

2/ I_{CCH1} is measured at pins 9 and 14 simultaneously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

3.7 Manufacturer eligibility. To be eligible to supply microcircuits to this specification, a manufacturer shall have a manufacturer certification in accordance with MIL-M-38510 for at least one line. Not necessarily the line producing the device type described herein.

3.8 Certification. Certification in accordance with MIL-M-38510 is not required for this device.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)
	Class B devices
Interim electrical parameters (pre burn-in) (method 5004)	1
Final electrical test parameters (method 5004)	1*,2,3,9
Group A test requirements (method 5005)	1,2,3,9
Groups C and D end-point electrical parameters (method 5005)	1,2,3
Additional electrical subgroups for group C periodic inspections	10,11

*PDA applies to subgroup 1 (see 4.2c).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883).

(1) Test condition D or E, using the circuit shown on figure 3, or equivalent.

(2) T_A = +125°C minimum.


b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) for class B devices shall be 10 percent based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883, and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of group A, subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 01

CASES A, B AND D

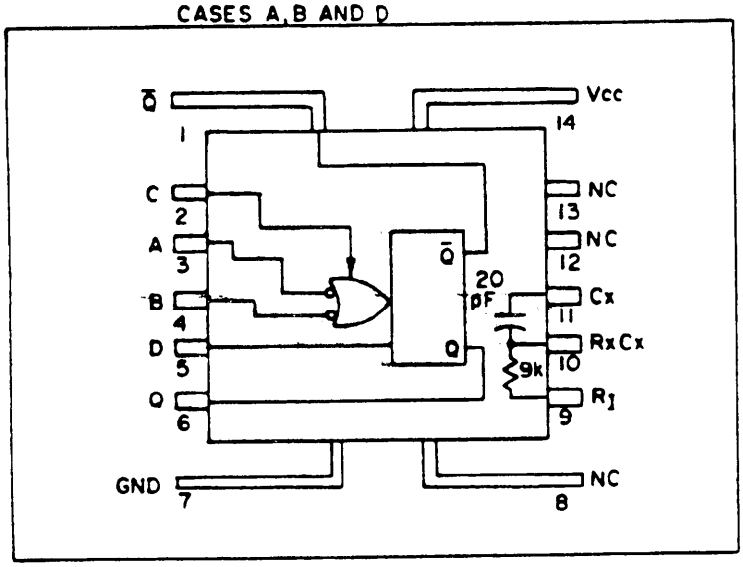

CASE C

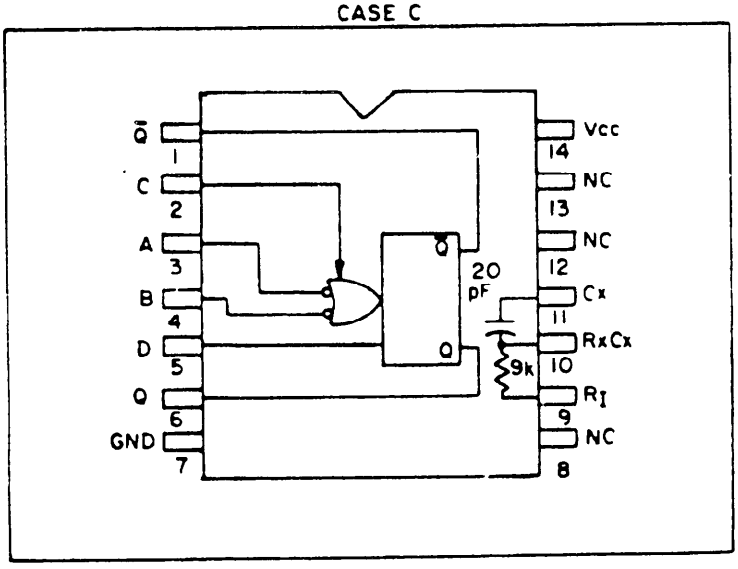


FIGURE 1. Logic diagram and terminal connections.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 01

TRUTH TABLE			
INPUTS			OUTPUT
A	B	C	Q
H	H	H	L
H	H	H	↑
H	H	↓	↑
H	↓	H	↑
↓	H	H	↑
L	X	X	L
X	L	X	L
X	X	L	L
X	X	X	L

FIGURE 2. Truth table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

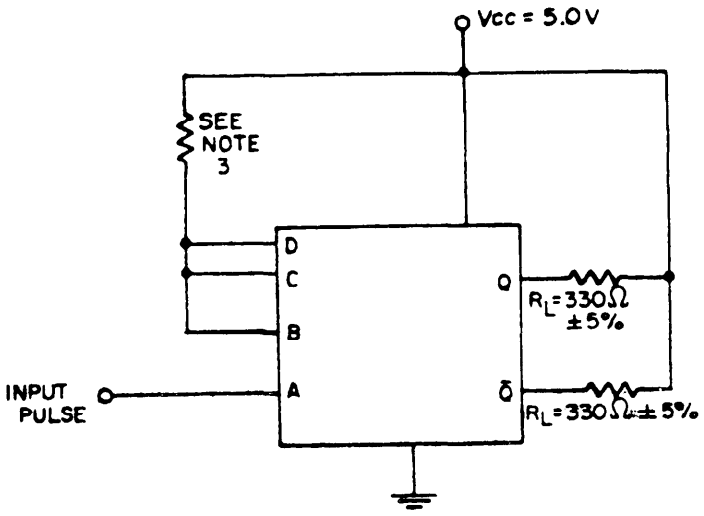

NOTES:
1. The input pulse characteristics are: Vgen = 4.0 V, PRR = 100 kHz, duty cycle = 50%, $t_{THL} = t_{TLH}$ = 100 ns.
2. All input adjustments are ±5%.
3. All undriven inputs are connected to V_{CC} thru appropriate current limiting resistors.
4. For parallel excitation: Clock pulse shall be 1 MHz and undriven inputs shall be connected to V_{CC} thru appropriate current limiting resistors.
5. Connect R_I (pin 9) to V_{CC}, R_X/C_X and C_X are left open.

FIGURE 3. Burn-in and life test circuits.

DESCRIPTION OF DEVICE:

This monostable multivibrator is designed to provide the system designer with the flexibility of controlling the pulse width, by using the following:


(a) With pin 9 connected to V_{CC} and no external capacitor (C_x), the output pulse width is approximately 100 ns.

(b) With pin 9 connected to V_{CC} and an external capacitor (C_x) connected between pins 10 and 11, the output pulse width (t_p) is: $t_p \approx 4.5\ (C_x + 20)$ with C_x in pF and t_p in ns.


(c) For improved pulse width control, pin 9 is left open and a stable external resistor (R_x) of 9 kΩ minimum to 15 kΩ maximum is connected from pin 10 to V_{CC}. R_x is shown in switching time test circuit. The output pulse width is: $t_p \approx 0.5\ R_x\ (C_x + 20)$ with R_x in kΩ, C_x in pF and t_p in ns.

FIGURE 4. Device description.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

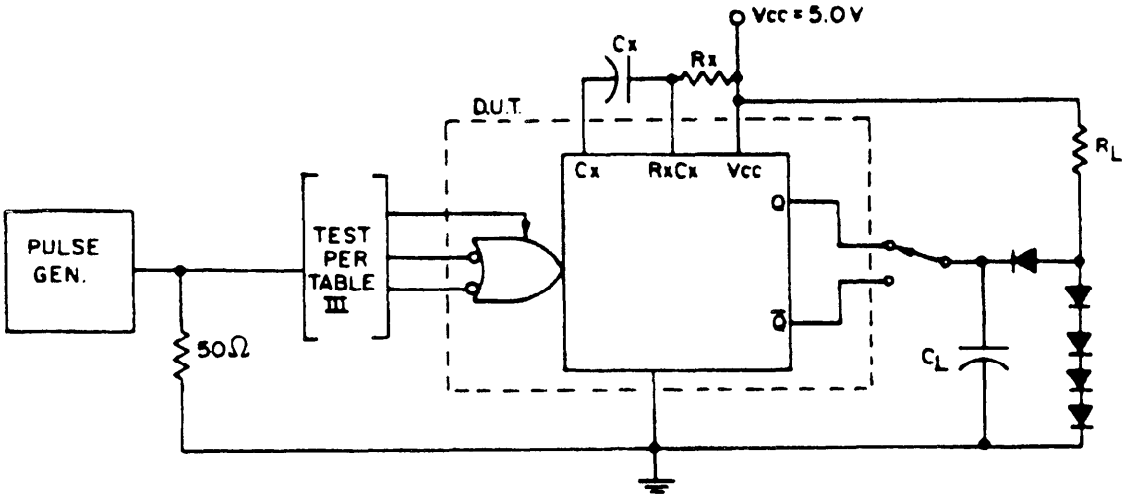

	t_{PLH}	t_{PHL}
R_L (±5%)	300Ω	300Ω
C_L	50 pF	50 pF

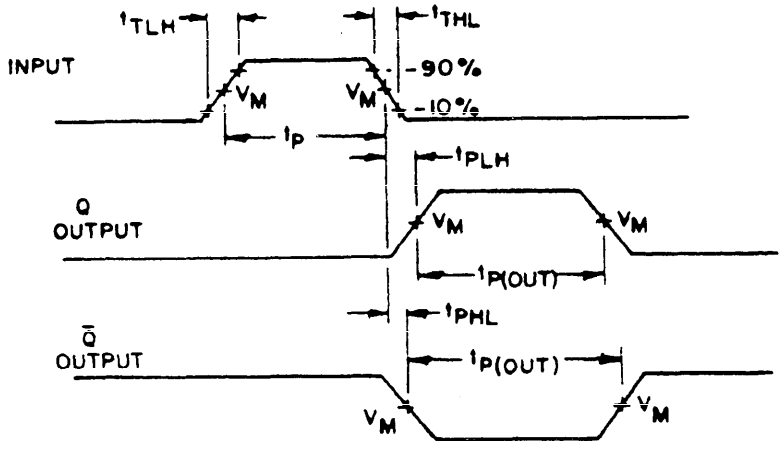

Temp °C	V_M
25	1.5
125	1.2
-55	1.7

NOTES:
1. The pulse generator has the following characteristics: Vgen = 4.0 V, t_{TLH} = t_{THL} = 10 ns, PRR = 1 MHz, t_p = 200 ns.
2. All input adjustments are ±5%.
3. C_L includes all jig and probe capacitance.
4. All diodes are 1N4150 or equivalent.
5. See table III for complete terminal conditions.

FIGURE 5. Switching time test circuit and waveforms.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

TABLE III. Group [illegible] pection for device type 01. 1/

Subgroup	Symbol	MIL-STD-883 method	Case A, B, D Case C Test No.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Meas. terminal	Test limits Min	Max	Unit
				$\overline{Q}$	C	A	B	D	Q	GND	NC	R_I	R_X/C_X	C_X	NC	NC	V_{CC}				
1	V_{OL}	3007	1	15 mA				2/		GND			GND				4.5 V	$\overline{Q}$		0.4	Vdc
T_C = +25°C	V_{OL}	3007	2	15 mA				GND										Q		0.4	
	V_{OL}	3007	3					2/	15 mA			4.5 V						Q		0.4	
	V_{OH}	3006	4	-0.18mA	GND							4.5 V						Q	3.4		
	V_{OH}	3006	5						-0.18mA				GND					Q	3.4		
	I_{IH1}	3010	6		GND	4.0 V	GND										5.5 V	A		2	µA
	I_{IH1}	3010	7		GND	GND	4.0 V											B		2	µA
	I_{IH2}	3010	8									5.5 V	GND					R_I	0.45	0.75	mA
	I_{IL1}	3009	9			0.4 V	4.0 V											A	-1.6	-3.1	
	I_{IL1}		10			4.0 V	0.4 V											B			
	I_{IL1}		11		0.4 V													C			
	I_{IL2}		12											0.4 V				C_X	-3.25	-6.5	
	I_{CCH1}	3005	13			GND	GND					5.0 V					5.0 V	V_{CC}, R_I 3/		9.0	
	I_{CCH2}	3005	14			GND	GND										8.0 V	V_{CC}		20	
2	V_{OL}	3007	15	14 mA									GND				4.5 V	$\overline{Q}$		0.45	Vdc
T_C = +125°C	V_{OL}	3007	16	14 mA				GND										Q		0.45	
	V_{OL}	3007	17					2/	14 mA			4.5 V						Q		0.45	
	V_{OH}	3006	18	-0.18mA	GND							4.5 V						Q	3.3		
	V_{OH}	3006	19						-0.18mA				GND					Q	3.3		
	I_{IH1}	3010	20		GND	4.0 V	GND										5.5 V	A		5	µA
	I_{IH1}	3010	21		GND	GND	4.0 V											B		5	µA
	I_{IH2}	3010	22									5.5 V	GND					R_I	0.45	0.75	mA
	I_{IL1}	3009	23			0.4 V	4.0 V											A	-1.6	-3.1	
	I_{IL1}		24			4.0 V	0.4 V											B			
	I_{IL1}		25		0.4 V													C			
	I_{IL2}		26											0.4 V				C_X	-3.25	-6.5	
	I_{CCH1}	3005	27			GND	GND					5.0 V					5.0 V	V_{CC}, R_I 3/		9.0	
	I_{CCH2}	3005	28			GND	GND										8.0 V	V_{CC}		20	
3	V_{OL}	3007	29	15 mA									GND				4.5 V	$\overline{Q}$		0.4	Vdc
T_C = -55°C	V_{OL}	3007	30	15 mA				GND										Q		0.4	
	V_{OL}	3007	31					2/	15mA			4.5 V						Q		0.4	
	V_{OH}	3006	32	-0.18mA	GND							4.5 V						Q	3.4		
	V_{OH}	3006	33						-0.8mA				GND					Q	3.4		
	I_{IH1}	3010	34		GND	4.0 V	GND										5.5 V	A		2	µA
	I_{IH1}	3010	35		GND	GND	4.0 V											B		2	µA
	I_{IH2}	3010	36									5.5 V	GND					R_I	0.45	0.75	mA
	I_{IL1}	3009	37			0.4 V	4.0 V											A	-1.6	-3.1	
	I_{IL1}		38			4.0 V	0.4 V											B			
	I_{IL1}		39		0.4 V													C			
	I_{IL2}		40											0.4 V				C_X	-3.25	-6.5	
	I_{CCH1}	3005	41			GND	GND					5.0 V					5.0 V	V_{CC}, R_I 3/		9.0	
	I_{CCH2}	3005	42			GND	GND										8.0 V	V_{CC}		20	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026/10-21T13:00Z
Check the source to verify that this is the current version before use.

Subgroup	Symbol	MIL-STD-883 method	Case A, B, D Case C Test No.	1 $\overline{Q}$	2 C	3 A	4 B	5 D	6 Q	7 GND	8 NC	9 R_I	10 R_X/C_X	11 C_X	12 NC	13 NC	14 V_{CC}	Meas. terminal	Test limits Min	Max	Unit
9 T_C = +25 C	t_{PLH}	3003	43		4/	IN	4/	2/	OUT	GND		5/	6/	6/			5.0 V	A to Q	5	40	ns
	t_{PHL}	Fig 5	44	OUT		IN												A to $\overline{Q}$			
	t_{PLH}		45				IN		OUT									B to Q			
	t_{PHL}		46	OUT			IN											B to $\overline{Q}$			
	$t_{P(OUT)1}$		47			IN	4/		OUT									Q	75	125	
	$t_{P(OUT)2}$		48	OUT														$\overline{Q}$	70	130	
	$t_{P(OUT)3}$		49						OUT			5/	7/	7/				Q	405	675	
	$t_{P(OUT)4}$		50	OUT								5/	7/	7/				$\overline{Q}$	400	680	
10 T_C = +125 C	t_{PLH}	3003	51			IN			OUT			5/	6/	6/				A to Q	5	45	
	t_{PHL}	Fig 5	52	OUT		IN												A to $\overline{Q}$			
	t_{PLH}		53				IN		OUT									B to Q			
	t_{PHL}		54	OUT			IN											B to $\overline{Q}$			
	$t_{P(OUT)1}$		55			IN	4/		OUT									Q	75	125	
	$t_{P(OUT)2}$		56	OUT														$\overline{Q}$	70	130	
	$t_{P(OUT)3}$		57						OUT			5/	7/	7/				Q	405	675	
	$t_{P(OUT)4}$		58	OUT								5/	7/	7/				$\overline{Q}$	400	680	
11 T_C = -55 C	t_{PLH}	3003	59			IN			OUT			5/	6/	6/				A to Q	5	40	
	t_{PHL}	Fig 5	60	OUT		IN												A to $\overline{Q}$			
	t_{PLH}		61				IN		OUT									B to Q			
	t_{PHL}		62	OUT			IN											B to $\overline{Q}$			
	$t_{P(OUT)1}$		63			IN	4/		OUT									Q	75	125	
	$t_{P(OUT)2}$		64	OUT														$\overline{Q}$	70	130	
	$t_{P(OUT)3}$		65						OUT			5/	6/	6/				Q	405	675	
	$t_{P(OUT)4}$		66	OUT								5/	6/	6/				$\overline{Q}$	400	680	

1/ Pins not designated may be high level logic, low level logic, or open.
2/ D (pin 5) is open or connected to ground through a capacitor.
3/ I_{CCH1} is measured at pins 9 and 10 simultaneously.
4/ C (pin 2) and B (pin 4) shall be open or high level logic.
5/ R_I (pin 9) connected to V_{CC}.
6/ R_X C_X (pin 10) and C_X (pin 11) are open.
7/ R_X C_X (pin 10) connected to C_X (pin 11) through a 100 pF capacitor.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:00Z
Check the source to verify that this is the current version before use.

4.3 Qualification inspection. Qualification inspection is not required.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510, and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4). Generic test data (see 6.6) may be used to satisfy the requirements for groups C and D inspections. Quality conformance inspection shall be completed on the specific devices covered by this specification before they are shipped.

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, 6, 7, and 8 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical parameters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical test parameters shall be as specified in table II herein.

b. Subgroups 3 and 4 shall be added to the group C inspection requirements for class B devices and shall consist of the tests, conditions, and limits specified for subgroups 10 and 11 of group A.

c. Steady-state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D or E, using the circuit shown on figure 3, or equivalent.

(2) T_A = +125°C minimum.

(3) Test duration: 1,000 hours, except as permitted by appendix B of MIL-M-38510.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883 End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified as follows.

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging of microcircuits shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Notes. The notes specified in MIL-M-38510 are applicable to this specification.

6.2 Intended use. Microcircuits conforming to this specification are intended for logistic support of existing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

6.3 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.

d. Requirements for notification of change of product or process to the contracting activity, if applicable.

e. Requirements for packaging and packing.

f. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements shall not apply to direct purchase by or direct shipment to the Government.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND	Electrical ground (common terminal)
I_{IN}	Current flowing into an input terminal
V_{IN}	Voltage level at an input terminal

6.5 Logistic support. Lead materials and finishes (see 3.3), are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2) and lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.6 Generic test data. Generic test data may be used to satisfy the requirements of 4.4.3. Group C generic test data shall be on date codes no more than one year old and on a die in the same microcircuit group (see appendix E of MIL-M-38510) with the same material, design and process and from the same plant as the die represented. Group D (see 4.4.4) generic data shall be on date codes no more than one year old and in the same package type (see terms, definitions, and symbols of MIL-M-38510) and from the same plant as the package represented. The vendor is required to retain the generic data for a period of not less than 36 months from the date of shipment.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	951

6.8 Ordering guidance. Since the qualification and certification requirements have been removed from the specification, orders may be placed immediately.

6.9 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Agent:
DLA - ES

Preparing activity:
Air Force - 17

(Project 5962-0591-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

ICTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in ng comments and suggestions for improvements. All users of military standardization documents are invited to provide ns. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*; and k 5, be as specific as possible about particular problem areas such as wording which required interpretation, was , tive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the s. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an edgement will be mailed to you within 30 days to let you know that your comments were received and are being ed.

This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of tion requirements on current contracts. Comments submitted on this form do not constitute or imply authorization any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

F THE AIR FORCE

BRE
ss AFB, NY 13441

BUSINESS
FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:00Z
Check the source to verify that this is the current version before use.

explanatory nature (This section contains information of a general or

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

IENT NUMBER	2. DOCUMENT TITLE
-38510/32A	MICROCIRCUITS, DIGITAL, DTL, MONOSTABLE MULTIVIBRATOR,

OF SUBMITTING ORGANIZATION MONOLITHIC SILICON

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

ESS *(Street, City, State, ZIP Code)*

EM AREAS

graph Number and Wording:

mmended Wording:

ion/Rationale for Recommendation:

KS

OF SUBMITTER *(Last, First, MI)* – Optional

b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional

ING ADDRESS *(Street, City, State, ZIP Code)* – Optional

8. DATE OF SUBMISSION *(YYMMDD)*

FORM 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:00Z
Check the source to verify that this is the current version before use.

books are available from the specifications, standards, and hand