QUALIFICATION
REQUIREMENTS
REMOVED

MIL-M-38510/41C
9 August 1983
SUPERSEDING
MIL-M-0038510/41B
1 May 1974 and
MIL-M-38510/41A(USAF)
31 May 1973

MILITARY SPECIFICATION

MICROCIRCUITS, DIGITAL, TTL, LOW-POWER, AND-OR-INVERT GATES,
MONOLITHIC SILICON

INACTIVE FOR NEW DESIGN AFTER DATE OF THIS REVISION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers the detail requirements for monolithic silicon, TTL, low-power, AND-OR-INVERT logic gating microcircuits. One product assurance class and a choice of case outlines and lead finishes are provided and are reflected in the complete part number.

1.2 Part number. The complete part number shall be in accordance with MIL-M-38510, with the exception that the "JAN" or "J" certification shall not be used.

1.2.1 Device types. The device types shall be as follows:

Device type	Circuit
01	Dual, 2-wide, AND-OR-INVERT gate
02	4-wide, 3-2-2-3 input AND-OR-INVERT gate
03	2-wide, 4 input AND-OR-INVERT gate

1.2.2 Device class. The device class shall be the product assurance level as defined in MIL-M-38510.

1.2.3 Case outline. The case outline shall be designated as follows:

Outline letter	Case outline (see MIL-M-38510, appendix C)
A	F-1 (14-lead, 1/4" x 1/4"), flat package
B	F-3 (14-lead, 1/8" x 1/4"), flat package
C	D-1 (14-lead, 1/4" x 3/4"), dual-in-line package
D	F-2 (14-lead, 1/4" x 3/8"), flat package

1.3 Absolute maximum ratings.

Supply voltage range	-0.5 V dc to +7.0 V dc
Input voltage range	0 V dc to +5.5 V dc
Storage temperature range	-65°C to +150°C
Maximum power dissipation, per device (P_D) 1/:	
Device type 01	8.75 mW dc
Device type 02	6.3 mW dc
Device type 03	4.5 mW dc
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction-to-case (θ_{JC}):	
Cases A, B, and D	0.09°C/mW
Case C	0.08°C/mW
Junction temperature (T_J)	+175°C

1/ Must withstand the added P_D due to short circuit test (e.g., I_{OS}).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Rome Air Development Center (RBE-2), Griffiss AFB, NY 13441, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5962

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

1.4 Recommended operating conditions.

Supply voltage range (V_{CC}) - - - - - - -	+4.5 V dc minimum to +5.5 V dc maximum
Minimum high-level input voltage (V_{IH}) -	+2.0 V dc
Maximum low-level input voltage (V_{IL}) -	+0.7 V dc
Normalized fanout (each output) 2/ - - -	10 maximum
Case operating temperature range (T_C) -	-55°C to +125°C

2. APPLICABLE DOCUMENTS

2.1 Government specifications and standards. Unless otherwise specified, the following specifications and standards, of the issue listed in that issue of the Department of Defense Index of Specifications and Standards specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-M-38510 - Microcircuits, General Specification for.

STANDARD

MILITARY

MIL-STD-883 - Test Methods and Procedures for Microelectronics.

(Copies of specifications, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Detail specification. The individual item requirements shall be in accordance with MIL-M-38510, and as specified herein.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-M-38510, and herein.

3.2.1 Logic diagrams and terminal connections. The logic diagrams and terminal connections shall be as specified on figure 1.

3.2.2 Truth tables and logic equations. The truth tables and logic equations shall be as specified on figure 2.

3.2.3 Case outlines. The case outlines shall be as specified in MIL-M-38510 and in 1.2.3 herein.

3.3 Lead material and finish. The lead material and finish shall be in accordance with MIL-M-38510 (see 6.5).

3.4 Electrical performance characteristics. The electrical performance characteristics are as specified in table I, and apply over the full recommended case operating temperature range, unless otherwise specified.

3.5 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table III.

3.6 Marking. Marking shall be in accordance with MIL-M-38510 and 1.2 herein. At the option of the manufacturer, marking of the country of origin may be omitted from the body of the microcircuit, but shall be retained on the initial container. The "JAN" or "J" certification mark shall not be used.

2/ Device will fanout in both high and low levels to the specified number of inputs of the same device type as that being tested.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical performance characteristics.

Test	Symbol	Conditions	Device type	Limits Min	Limits Max	Unit
High-level output voltage	V_{OH}	V_{CC} = +4.5 V, V_{IN} = +0.7 V I_{OH} = -100 µA 1/		2.4		V
Low-level output voltage	V_{OL}	V_{CC} = +4.5 V, I_{OL} = +2 mA V_{IN} = +2.0 V for all inputs of gate under test			0.3	V
High-level input current	I_{IH1}	V_{CC} = +5.5 V, V_{IN} = +2.4 V 2/			10	µA
	I_{IH2}	V_{CC} = +5.5 V, V_{IN} = +5.5 V 2/			100	µA
Low-level input current	I_{IL}	V_{CC} = +5.5 V, V_{IN} = +0.3 V 1/			-0.18	mA
Short circuit outut current	I_{OS}	V_{CC} = +5.5 V 2/,3/		-3	-15	mA
High-level supply current	I_{CCH}	V_{CC} = +5.5 V 2/ V_{IN} = 0 V	01,02		0.8	mA
			03		0.4	mA
Low-level supply current per gate	I_{CCL}	V_{CC} = +5.5 V 1/ V_{IN} = +5.5 V	01		1.3	mA
			02		0.99	mA
			03		0.65	mA
Propagation delay time high-to-low level	t_{PHL}	C_L = 50 pF, R_L = 4 kΩ		3	99	ns
Propagation delay time low-to-high level	t_{PLH}	C_L = 50 pF, R_L = 4 kΩ		3	120	ns

1/ All unspecified inputs at 5.5 volts.

2/ All unspecified inputs grounded.

3/ Not more than one output should be shorted at a time.

3.7 Manufacturer eligibility. To be eligible to supply microcircuits to this specification, a manufacturer shall have a manufacturer certification in accordance with MIL-M-38510 for at least one line; not necessarily the line producing the device type described herein.

3.8 Certification. Certification in accordance with MIL-M-38510 is not required for this device.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (see table III)
	Class B devices
Interim electrical parameters (pre burn-in) (method 5004)	1
Final electrical test parameters (method 5004)	1*,2,3,9
Group A test requirements (method 5005)	1,2,3,9
Groups C and D end-point electrical parameters (method 5005)	1,2,3
Additional electrical subgroups for group C periodic inspections	10,11

*PDA applies to subgroup 1 (see 4.2c).

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-M-38510 and methods 5005 and 5007, as applicable, of MIL-STD-883, except as modified herein.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test (method 1015 of MIL-STD-883).

(1) Test condition D or E, using the circuit shown on figure 3, or equivalent.

(2) T_A = +125°C minimum.


b. Interim and final electrical test parameters shall be as specified in table II, except interim electrical parameters test prior to burn-in is optional at the discretion of the manufacturer.

c. The percent defective allowable (PDA) for class B devices shall be 10 percent based on failures from group A, subgroup 1 test after cooldown as final electrical test in accordance with method 5004 of MIL-STD-883, and with no intervening electrical measurements. If interim electrical parameter tests are performed prior to burn-in, failures resulting from pre burn-in screening may be excluded from the PDA. If interim electrical parameter tests prior to burn-in are omitted, then all screening failures shall be included in the PDA. The verified failures of group A, subgroup 1, after burn-in divided by the total number of devices submitted for burn-in in that lot shall be used to determine the percent defective for that lot, and the lot shall be accepted or rejected based on the PDA for the applicable device class.


4.3 Qualification inspection. Qualification inspection is not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

Device type 01

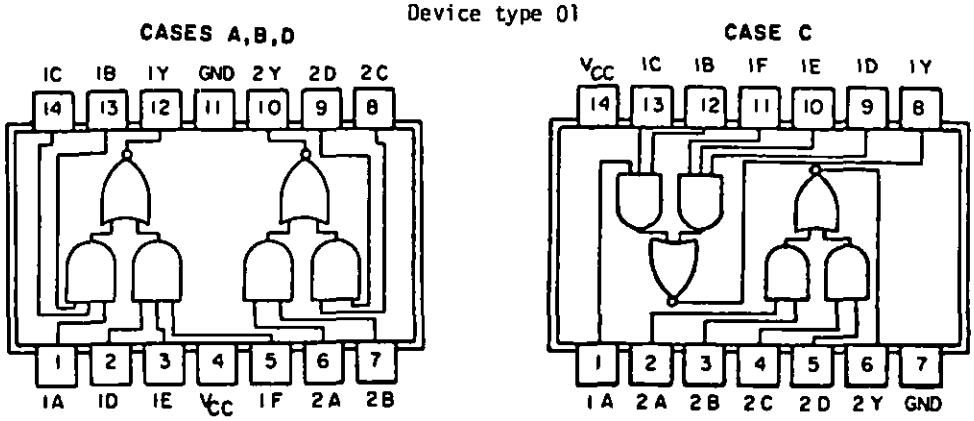

Device type 02

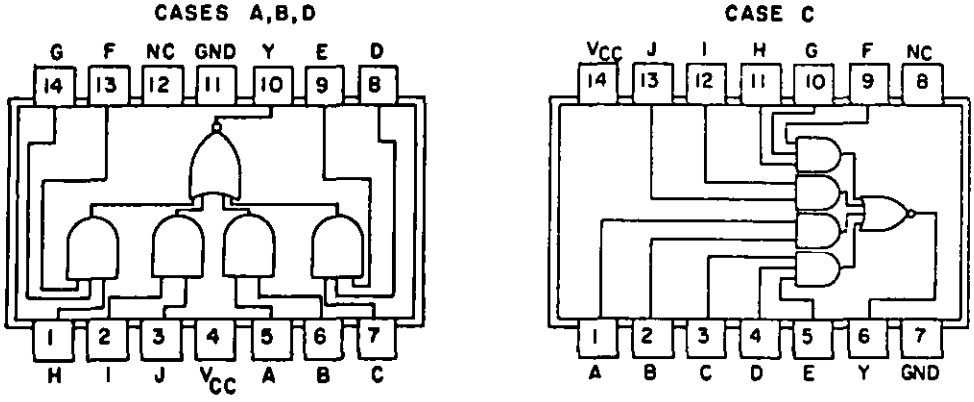

Device type 03

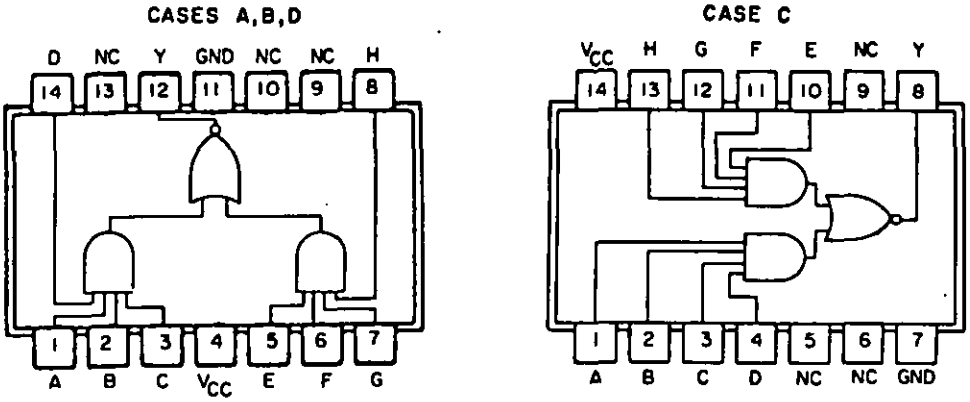


FIGURE 1. Logic diagrams and terminal connections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

DEVICE TYPE 01, GATE 1

INPUTS						OUTPUT
1A	1B	1C	1D	1E	1F	1Y
H	H	H	*	*	*	L
*	*	*	H	H	H	L

DEVICE TYPE 01, GATE 2

INPUTS				OUTPUT
2A	2B	2C	2D	2Y
H	H	*	*	L
*	*	H	H	L

* Either H or L
All other combinations of H and L at the input give H output.

Positive Logic: $1Y = \overline{(1A \cdot 1B \cdot 1C) + (1D \cdot 1E \cdot 1F)}$

$2Y = \overline{(2A \cdot 2B) + (2C \cdot 2D)}$

DEVICE TYPE 02

INPUTS										OUTPUT
A	B	C	D	E	F	G	H	I	J	Y
H	H	*	*	*	*	*	*	*	*	L
*	*	H	H	H	*	*	*	*	*	L
*	*	*	*	*	H	H	H	*	*	L
*	*	*	*	*	*	*	*	H	H	L

* Either H or L - All other combinations of H and L at the input give H output.

Positive Logic: $\overline{Y = AB + CDE + FGH + IJ}$

DEVICE TYPE 03


INPUTS								OUTPUT
A	B	C	D	E	F	G	H	Y
H	H	H	H	*	*	*	*	L
*	*	*	*	H	H	H	H	L

* Either H or L - All other combinations of H and L at the input give H output.

Positive logic: $Y = \overline{(A\ B\ C\ D) + (E\ F\ G\ H)}$

FIGURE 2. Truth tables and logic equations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

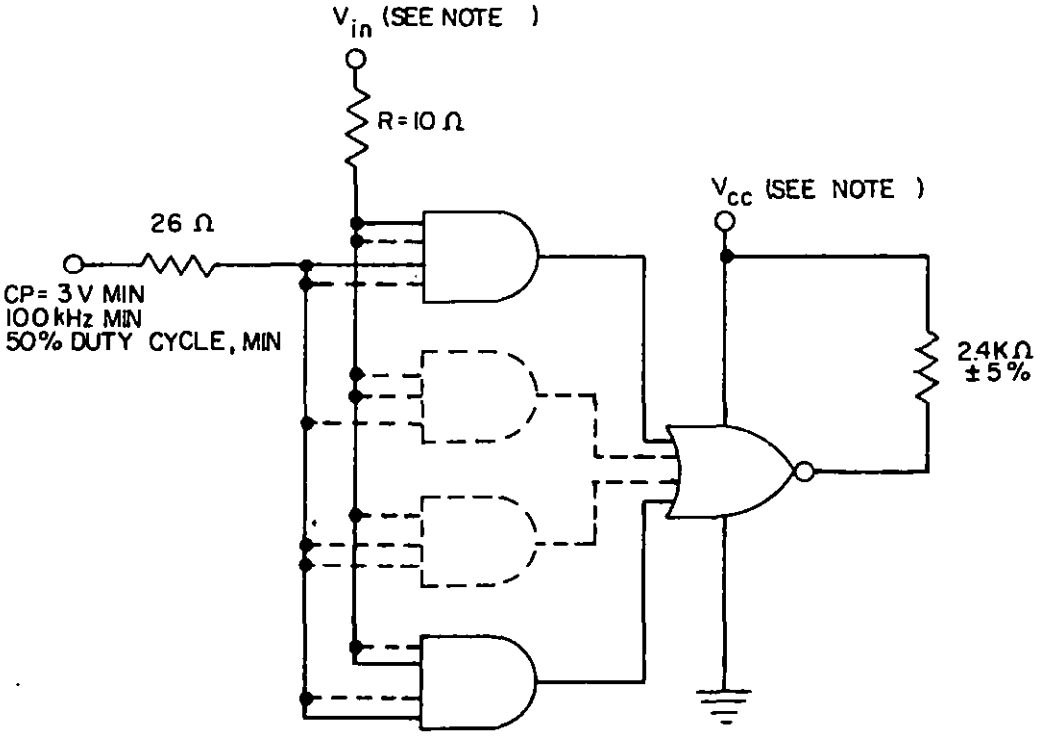

NOTE: V_{IN} and V_{CC} = 5 Volts, minimum, at the device terminals.

FIGURE 3. Burn-in and life test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection. Quality conformance inspection shall be in accordance with MIL-M-38510, and as specified herein. Inspections to be performed shall be those specified in method 5005 of MIL-STD-883 and herein for groups A, B, C, and D inspections (see 4.4.1 through 4.4.4). Generic test data (see 6.6) may be used to satisfy the requirements for groups C and D inspections. Quality conformance inspection shall be completed on the specific devices covered by this specification before they are shipped.

4.4.1 Group A inspection. Group A inspection shall be in accordance with table I of method 5005 of MIL-STD-883 and as follows:

a. Tests shall be as specified in table II herein.

b. Subgroups 4, 5, 6, 7, and 8 of table I of method 5005 of MIL-STD-883 shall be omitted.

4.4.2 Group B inspection. Group B inspection shall be in accordance with table II of method 5005 of MIL-STD-883. Electrical paramters shall be as specified in table II herein.

4.4.3 Group C inspection. Group C inspection shall be in accordance with table III of method 5005 of MIL-STD-883 and as follows:

a. End-point electrical test parameters shall be as specified in table II herein.

b. Subgroups 3 and 4 shall be added to the group C inspection requirements for class B devices and shall consist of the tests, conditions, and limits specified for subgroups 10 and 11 of group A.

c. Steady-state life test (method 1005 of MIL-STD-883) conditions:

(1) Test condition D or E, using the circuit shown on figure 3, or equivalent.

(2) T_A = +125°C minimum.

(3) Test duration: 1,000 hours, except as permitted by appendix B of MIL-M-38510.

4.4.4 Group D inspection. Group D inspection shall be in accordance with table IV of method 5005 of MIL-STD-883 End-point electrical parameters shall be as specified in table II herein.

4.5 Methods of inspection. Methods of inspection shall be specified as follows.

4.5.1 Voltage and current. All voltages given are referenced to the microcircuit ground terminal. Currents given are conventional and positive when flowing into the referenced terminal.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging of microcircuits shall be in accordance with MIL-M-38510.

6. NOTES

6.1 Notes. The notes specified in MIL-M-38510 are applicable to this specification.

6.2 Intended use. Microcircuits conforming to this specification are intended for logistic support of existing equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01.
Terminal conditions (pins not designated may be high ≥2.0 V; low ≤0.7 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,D / Case C	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits Min	Limits Max	Unit
			Test no.	1A	1D	1E	V_{CC}	1F	2A	2B	2C	2D	2Y	GND	1Y	1B	1C				
1 T_C = +25°C	V_{OH}	3006	1	0.7 V	0.7 V	5.5 V	4.5 V	5.5 V						GND	-100 µA	5.5 V	5.5 V	1Y	2.4		V
	"	"	2	5.5 V	5.5 V	0.7 V	"	5.5 V						"	"	0.7 V	5.5 V	1Y	"		"
	"	"	3	5.5 V	5.5 V	5.5 V	"	0.7 V						"	"	5.5 V	0.7 V	1Y	"		"
	"	"	4				"		0.7 V	5.5 V	0.7 V	5.5 V	-100 µA	"				2Y	"		"
	"	"	5				"		5.5 V	0.7 V	5.5 V	0.7 V	-100 µA	"				2Y	"		"
	V_{OL}	3007	6	2.0 V	GND	GND	"	GND						"	2 mA	2.0 V	2.0 V	1Y		0.3	"
	"	"	7	GND	2.0 V	2.0 V	"	2.0 V						"	2 mA	GND	GND	1Y		"	"
	"	"	8				"		2.0 V	2.0 V	GND	GND	2 mA	"				2Y		"	"
	"	"	9				"		GND	GND	2.0 V	2.0 V	2 mA	"				2Y		"	"
	I_{IL}	3009	10	0.3 V			5.5 V							"		5.5 V	5.5 V	1A		-0.18	mA
	"	"	11	5.5 V			"							"		0.3 V	5.5 V	1B		"	"
	"	"	12	5.5 V			"							"		5.5 V	0.3 V	1C		"	"
	"	"	13		0.3 V	5.5 V	"	5.5 V						"				1D		"	"
	"	"	14		5.5 V	0.3 V	"	5.5 V						"				1E		"	"
	"	"	15		5.5 V	5.5 V	"	0.3 V						"				1F		"	"
	"	"	16				"		0.3 V	5.5 V				"				2A		"	"
	"	"	17				"		5.5 V	0.3 V				"				2B		"	"
	"	"	18				"				0.3 V	5.5 V		"				2C		"	"
	"	"	19				"				5.5 V	0.3 V		"				2D		"	"
	I_{IH1}	3010	20	2.4 V			"							"		GND	GND	1A		10	µA
	"	"	21	GND			"							"		2.4 V	GND	1B		"	"
	"	"	22	GND			"							"		GND	2.4 V	1C		"	"
	"	"	23		2.4 V	GND	"	GND						"				1D		"	"
	"	"	24		GND	2.4 V	"	GND						"				1E		"	"
	"	"	25		GND	GND	"	2.4 V						"				1F		"	"
	"	"	26				"		2.4 V	GND				"				2A		"	"
	"	"	27				"		GND	2.4 V				"				2B		"	"
	"	"	28				"				2.4 V	GND		"				2C		"	"
	"	"	29				"				GND	2.4 V		"				2D		"	"
	I_{IH2}	"	30	5.5 V			"							"		GND	GND	1A		100	"
	"	"	31	GND			"							"		5.5 V	GND	1B		"	"
	"	"	32	GND			"							"		GND	5.5 V	1C		"	"
	"	"	33		5.5 V	GND	"	GND						"				1D		"	"
	"	"	34		GND	5.5 V	"	GND						"				1E		"	"
	"	"	35		GND	GND	"	5.5 V						"				1F		"	"
	"	"	36				"		5.5 V	GND				"				2A		"	"
	"	"	37				"		GND	5.5 V				"				2B		"	"
	"	"	38				"				5.5 V	GND		"				2C		"	"
	"	"	39				"				GND	5.5 V		"				2D		"	"
	I_{OS}	3011	40	GND	GND	GND	"	GND						"	GND	GND	GND	1Y	-3	-15	mA
	"	3011	41				"		GND	GND	GND	GND	GND	"				2Y	-3	-15	"
	I_{CCL}	3005	42	5.5 V	5.5 V	5.5 V	"	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V		"		5.5 V	5.5 V	V_{CC}		1.3	"
	I_{CCH}	3005	43	GND	GND	GND	"	GND	GND	GND	GND	GND		"		GND	GND	V_{CC}		0.8	"

Source: https://assist.dla.mil -- Downloaded: 202610-21T13:01Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 01 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V; low ≤0.7 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,D Case C Test no.	1 1 1A	2 9 1D	3 10 1E	4 14 V_{CC}	5 11 1F	6 2 2A	7 3 2B	8 4 2C	9 5 2D	10 6 2Y	11 7 GND	12 8 1Y	13 12 1B	14 13 1C	Measured terminal	Limits Min	Limits Max	Unit
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C.																				
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C.																				
9 T_C= +25°C	t_{PHL}	3003 Fig. 4	44 45	IN	GND	GND	5.0 V "	GND	IN	2.4 V	GND	GND	OUT	GND "	OUT	2.4 V	2.4 V	1Y to 1A 2Y to 2A	3 "	66 66	ns "
	t_{PLH}	" "	46 47	IN	GND	GND	" "	GND	IN	2.4 V	GND	GND	OUT	" "	OUT	2.4 V	2.4 V	1Y to 1A 2Y to 2A	" "	90 90	" "
10 T_C= +125°C	t_{PHL}	" "	48 49	IN	GND	GND	" "	GND	IN	2.4 V	GND	GND	OUT	" "	OUT	2.4 V	2.4 V	1Y to 1A 2Y to 2A	3 "	99 99	" "
	t_{PLH}	" "	50 51	IN	GND	GND	" "	GND	IN	2.4 V	GND	GND	OUT	" "	OUT	2.4 V	2.4 V	1Y to 1A 2Y to 2A	" "	120 120	" "
11	Same tests, terminal conditions, and limits as for subgroup 10, except T_C = -55°C.																				

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:01Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02.
Terminal conditions (pins not designated may be high ≥2.0 V; low ≤0.7 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,D Case C Test no.	5 1 A	6 2 B	7 3 C	8 4 D	9 5 E	10 6 Y	11 7 GND	12 8 NC	13 9 F	14 10 G	1 11 H	2 12 I	3 13 J	4 14 V_{CC}	Measured terminal	Limits Min	Limits Max	Unit
1 T_C = +25°C	V_{OH}	3006	1	0.7 V	5.5 V	0.7 V	5.5 V	5.5 V	-100 µA	GND		5.5 V	5.5 V	0.7 V	0.7 V	5.5 V	4.5 V	Y	2.4		V
		"	2	5.5 V	0.7 V	5.5 V	0.7 V	5.5 V	"	"		5.5 V	0.7 V	5.5 V	5.5 V	0.7 V	"	"	"		"
		"	3	5.5 V	0.7 V	5.5 V	5.5 V	0.7 V	"	"		0.7 V	5.5 V	5.5 V	5.5 V	0.7 V	"	"	"		"
	V_{OL}	3007	4	GND	GND	2.0 V	2.0 V	2.0 V	2 mA	"		GND	GND	GND	GND	GND	"	"		0.3	"
		"	5	2.0 V	2.0 V	GND	GND	GND	"	"		"	"	"	GND	GND	"	"		"	"
		"	6	GND	GND	"	"	"	"	"		"	"	"	2.0 V	2.0 V	"	"		"	"
		"	7	GND	GND	"	"	"	"	"		2.0 V	2.0 V	2.0 V	GND	GND	"	"		"	"
	I_{IL}	3009	8	0.3 V	5.5 V					"							5.5 V	A		-0.18	mA
		"	9	5.5 V	0.3 V					"							"	B		"	"
		"	10			0.3 V	5.5 V	5.5 V		"							"	C		"	"
		"	11			5.5 V	0.3 V	5.5 V		"							"	D		"	"
		"	12			5.5 V	5.5 V	0.3 V		"							"	E		"	"
		"	13							"		0.3 V	5.5 V	5.5 V			"	F		"	"
		"	14							"		5.5 V	0.3 V	5.5 V			"	G		"	"
		"	15							"		5.5 V	5.5 V	0.3 V			"	H		"	"
		"	16							"					0.3 V	5.5 V	"	I		"	"
		"	17							"					5.5 V	0.3 V	"	J		"	"
	I_{IH1}	3010	18	2.4 V	GND					"							"	A		10	µA
		"	19	GND	2.4 V					"							"	B		"	"
		"	20			2.4 V	GND	GND		"							"	C		"	"
		"	21			GND	2.4 V	GND		"							"	D		"	"
		"	22			GND	GND	2.4 V		"							"	E		"	"
		"	23							"		2.4 V	GND	GND			"	F		"	"
		"	24							"		GND	2.4 V	GND			"	G		"	"
		"	25							"		GND	GND	2.4 V			"	H		"	"
		"	26							"					2.4 V	GND	"	I		"	"
		"	27							"					GND	2.4 V	"	J		"	"
	I_{IH2}	"	28	5.5 V	GND					"							"	A		100	"
		"	29	GND	5.5 V					"							"	B		"	"
		"	30			5.5 V	GND	GND		"							"	C		"	"
		"	31			GND	5.5 V	GND		"							"	D		"	"
		"	32			GND	GND	5.5 V		"							"	E		"	"
		"	33							"		5.5 V	GND	GND			"	F		"	"
		"	34							"		GND	5.5 V	GND			"	G		"	"
		"	35							"		GND	GND	5.5 V			"	H		"	"
		"	36							"					5.5 V	GND	"	I		"	"
		"	37							"					GND	5.5 V	"	J		"	"
	I_{OS}	3011	38	GND	GND	GND	GND	GND	GND	"		GND	GND	GND	GND	GND	"	Y	-3	-15	mA
	I_{CCL}	3005	39	5.5 V	5.5 V	5.5 V	5.5 V	5.5 V		"		5.5 V	5.5 V	5.5 V	5.5 V	5.5 V	"	V_{CC}		0.99	"
	I_{CCH}	3005	40	GND	GND	GND	GND	GND		"		GND	GND	GND	GND	GND	"	V_{CC}		0.8	"

Source: https://assist.dla.mil -- Downloaded: 20261021T13:01Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 02 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V; low ≤0.7 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,D / Case C / Test no.	5 / 1 / A	6 / 2 / B	7 / 3 / C	8 / 4 / D	9 / 5 / E	10 / 6 / Y	11 / 7 / GND	12 / 8 / NC	13 / 9 / F	14 / 10 / G	1 / 11 / H	2 / 12 / I	3 / 13 / J	4 / 14 / V_{CC}	Measured terminal	Limits Min	Limits Max	Unit
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C.																				
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C.																				
9 T_C = +25°C	t_{PHL}	3003 Fig. 4	41	IN	2.4 V	GND	GND	GND	OUT	GND		GND	GND	GND	GND	GND	5.0 V	Y to A	3	66	ns
	t_{PLH}	"	42	"	"	"	"	"	"	"		"	"	"	"	"	"	"	"	90	"
10 T_C = +125°C	t_{PHL}	3003 Fig. 4	43	"	"	"	"	"	"	"		"	"	"	"	"	"	"	"	99	"
	t_{PLH}	"	44	"	"	"	"	"	"	"		"	"	"	"	"	"	"	"	120	"
11	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																				

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T13:01Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03.
Terminal conditions (pins not designated may be high ≥2.0 V; low ≤0.7 V; or open).


Subgroup	Symbol	MIL-STD-883 method	Cases A,B,D Case C Test no.	1	2	3	4	5	6	7	8	9	10	11	12	13	14	Measured terminal	Limits Min	Limits Max	Unit
				1	2	3	14	10	11	12	13	5	6	7	8	9	4				
				A	B	C	V_{CC}	E	F	G	H	NC	NC	GND	Y	NC	D				
1 T_C = +25°C	V_{OH}	3006	1	0.7 V	5.5 V	5.5 V	4.5 V	0.7 V	5.5 V	5.5 V	5.5 V			GND	-100 µA		5.5 V	Y	2.4		V
		"	2	5.5 V	0.7 V	5.5 V	"	5.5 V	0.7 V	5.5 V	"			"	"		"	"	"		"
		"	3	"	5.5 V	0.7 V	"	"	5.5 V	0.7 V	"			"	"		"	"	"		"
		"	4	"	5.5 V	5.5 V	"	"	5.5 V	5.5 V	0.7 V			"	"		0.7 V	"	"		"
	V_{OL}	3007	5	2.0 V	2.0 V	2.0 V	"	GND	GND	GND	GND			"	2 mA		2.0 V	"		0.3	"
		3007	6	GND	GND	GND	"	2.0 V	2.0 V	2.0 V	2.0 V			"	2 mA		GND	"		0.3	"
	I_{IL}	3009	7	0.3 V	5.5 V	5.5 V	5.5 V							"			5.5 V	A		-0.18	mA
		"	8	5.5 V	0.3 V	5.5 V	"							"			"	B		"	"
		"	9	"	5.5 V	0.3 V	"							"			"	C		"	"
		"	10		5.5 V	5.5 V	"							"			0.3 V	D		"	"
		"	11				"	0.3 V	5.5 V	5.5 V	5.5 V			"				E		"	"
		"	12				"	5.5 V	0.3 V	5.5 V	"			"				F		"	"
		"	13				"	"	5.5 V	0.3 V	"			"				G		"	"
		"	14				"	"	5.5 V	5.5 V	0.3 V			"				H		"	"
	I_{IH1}	3010	15	2.4 V	GND	GND	"							"			GND	A		10	µA
		"	16	GND	2.4 V	GND	"							"			"	B		"	"
		"	17	"	GND	2.4 V	"							"			"	C		"	"
		"	18	"	GND	GND	"							"			2.4 V	D		"	"
		"	19				"	2.4 V	GND	GND	GND			"				E		"	"
		"	20				"	GND	2.4 V	GND	"			"				F		"	"
		"	21				"	"	GND	2.4 V	"			"				G		"	"
		"	22				"	"	GND	GND	2.4 V			"				H		"	"
	I_{IH2}	"	23	5.5 V	GND	GND	"							"			GND	A		100	"
		"	24	GND	5.5 V	GND	"							"			"	B		"	"
		"	25	"	GND	5.5 V	"							"			"	C		"	"
		"	26	"	GND	GND	"							"			5.5 V	D		"	"
		"	27				"	5.5 V	GND	GND	GND			"				E		"	"
		"	28				"	GND	5.5 V	GND	"			"				F		"	"
		"	29				"	"	GND	5.5 V	"			"				G		"	"
		"	30				"	"	"	GND	5.5 V			"				H		"	"
	I_{OS}	3011	31	GND	GND	GND	"	"	"	GND	GND			"	GND		GND	Y	-3	-15	mA
	I_{CCL}	3005	32	5.5 V	5.5 V	5.5 V	"	5.5 V	5.5 V	5.5 V	5.5 V			"			5.5 V	V_{CC}		0.65	"
	I_{CCH}	3005	33	GND	GND	GND	"	GND	GND	GND	GND			"			GND	V_{CC}		0.4	"

Source: https://assist.dla.mil -- Downloaded: 20260-21T13:01Z
Check the source to verify that this is the current version before use.

TABLE III. Group A inspection for device type 03 - Continued.
Terminal conditions (pins not designated may be high ≥2.0 V; low ≤0.7 V; or open).

Subgroup	Symbol	MIL-STD-883 method	Cases A,B,D Case C Test no.	1 1 A	2 2 B	3 3 C	4 14 V_{CC}	5 10 E	6 11 F	7 12 G	8 13 H	9 5 NC	10 6 NC	11 7 GND	12 8 Y	13 9 NC	14 4 D	Measured terminal	Limits Min	Limits Max	Unit
2	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = +125°C.																				
3	Same tests, terminal conditions, and limits as for subgroup 1, except T_C = -55°C.																				
9 T_C = +25°C	t_{PLH}	3003 Fig. 4	34	IN	2.4 V	2.4 V	5.0 V	GND	GND	GND	GND			GND	OUT		2.4 V	Y to A	3	90	ns
	t_{PHL}	"	35	"	"	"	"	"	"	"	"			"	"		"	"	"	66	"
10 T_C = +125°C	t_{PLH}	3003 Fig. 4	36	"	"	"	"	"	"	"	"			"	"		"	"	"	120	"
	t_{PHL}	"	37	"	"	"	"	"	"	"	"			"	"		"	"	"	99	"
11	Same tests, terminal conditions, and limits as subgroup 10, except T_C = -55°C.																				

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

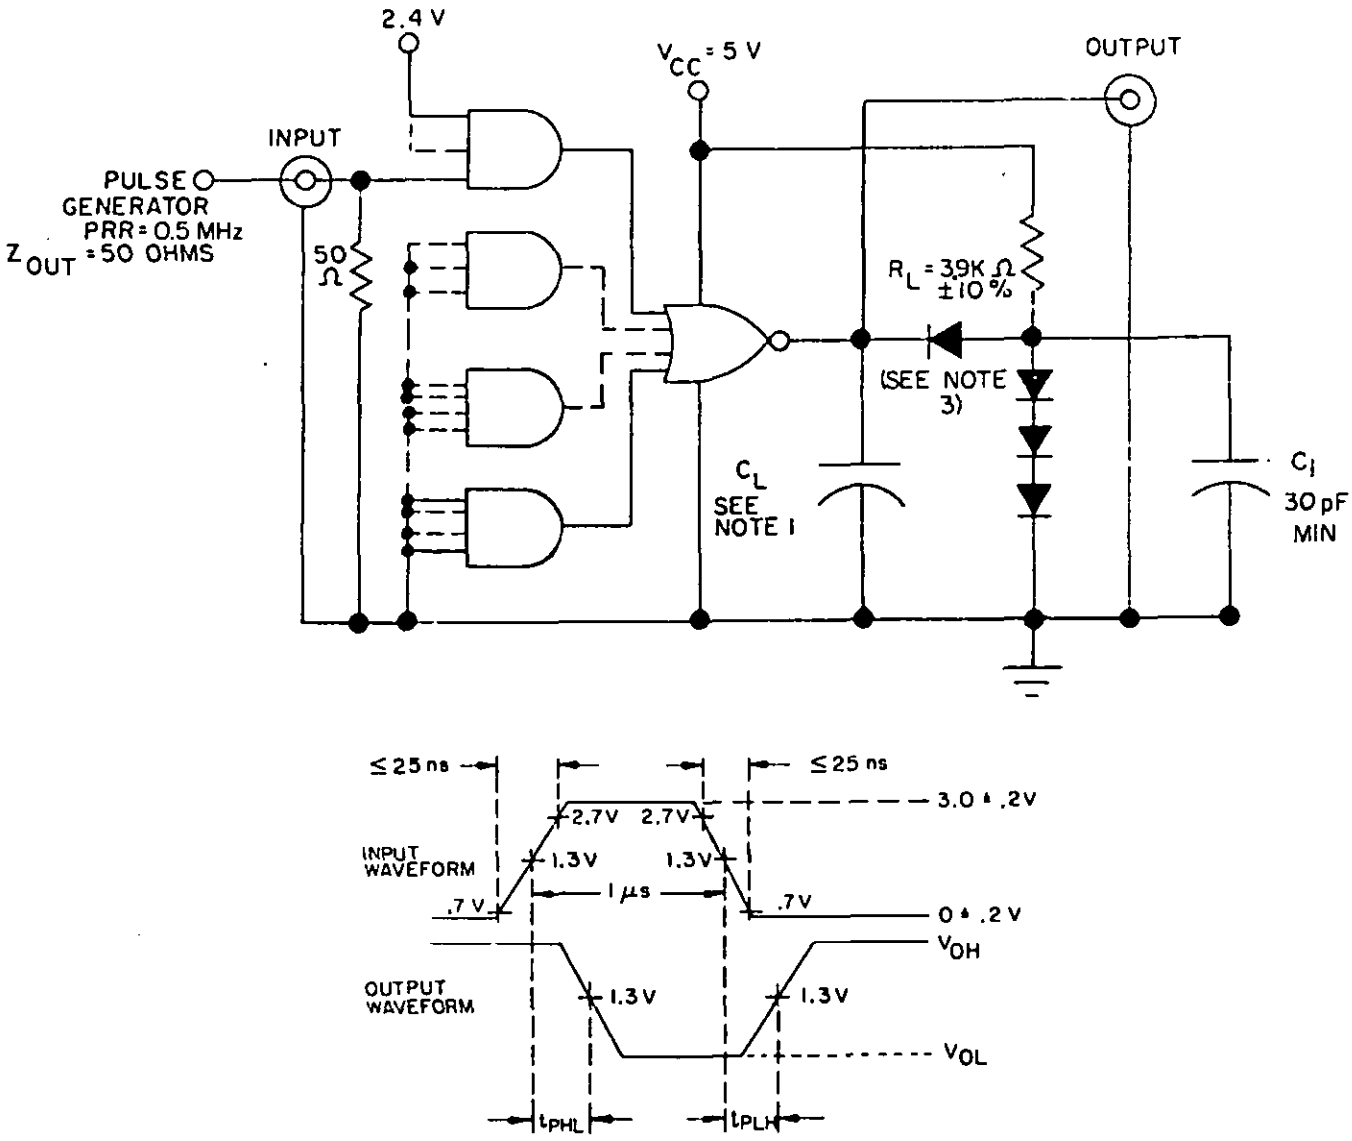

NOTES:
1. C_L = 50 pF minimum including scope probe, wiring, and stray capacitance, without package in test fixture.
2. Voltage measurements are to be made with respect to network ground terminal.
3. All diodes are 1N3064 or equivalent.

FIGURE 4. Switching time test circuit.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

6.3 Ordering data. The acquisition document should specify the following:

a. Complete part number (see 1.2).

b. Requirements for delivery of one copy of the quality conformance inspection data pertinent to the device inspection lot to be supplied with each shipment by the device manufacturer, if applicable.

c. Requirements for certificate of compliance, if applicable.

d. Requirements for notification of change of product or process to the contracting activity, if applicable.

e. Requirements for packaging and packing.

f. Requirements for special carriers, lead lengths, or lead forming, if applicable. These requirements shall not affect the part number. Unless otherwise specified, these requirements shall not apply to direct purchase by or direct shipment to the Government.

6.4 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-M-38510, MIL-STD-1331, and as follows:

GND	Electrical ground (common terminal)
I_{IN}	Current flowing into an input terminal
V_{IN}	Voltage level at an input terminal

6.5 Logistic support. Lead materials and finishes (see 3.3), are interchangeable. Unless otherwise specified, microcircuits acquired for Government logistic support will be acquired to device class B (see 1.2.2) and lead material and finish C (see 3.3). Longer length leads and lead forming shall not affect the part number.

6.6 Generic test data. Generic test data may be used to satisfy the requirements of 4.4.3. Group C generic test data shall be on date codes no more than one year old and on a die in the same microcircuit group (see appendix E of MIL-M-38510) with the same material, design and process and from the same plant as the die represented. Group D (see 4.4.4) generic data shall be on date codes no more than one year old and on the same package type (see terms, definitions, and symbols of MIL-M-38510) and from the same plant as the package represented. The vendor is required to retain the generic data for a period of not less than 36 months from the date of shipment.

6.7 Substitutability. The cross-reference information below is presented for the convenience of users. Microcircuits covered by this specification will functionally replace the listed generic-industry type. Generic-industry microcircuit types may not have equivalent operational performance characteristics across military temperature ranges or reliability factors equivalent to MIL-M-38510 device types and may have slight physical variations in relation to case size. The presence of this information shall not be deemed as permitting substitution of generic-industry types for MIL-M-38510 types or as a waiver of any of the provisions of MIL-M-38510.

Military device type	Generic-industry type
01	54L51
02	54L54
03	54L55

6.8 Ordering guidance. Since the qualification and certification requirements have been removed from the specification, orders may be placed immediately.

6.9 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 17

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 19, 85, 99
DLA - ES

User activities:
Army - SM
Navy - AS, CG, MC

Agent:
DLA - ES

Preparing activity:
Air Force - 17

(Project 5962-0591-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 6, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

Commander
Rome Air Development Center
Attn: RBE-2
Griffiss AFB, NY 13441

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T13:01Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-38510/41C	MICORCIRCUITS, DIGITAL, TTL, LOW-POWER, AND OR-INVERT GATES

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil – Downloaded: 2026-04-21T13:01Z
Check the source to verify that this is the current version before use.