MIL-M-45532B
29 April 1976
SUPERSEDING
MIL-M-45532A(WC)
7 May 1969

MILITARY SPECIFICATION

MOUNT, TRIPOD, MACHINE GUN: M122

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of lightweight, portable, tripod ground mount designed for use with the 7.62mm, M60 machine gun.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on the date of incitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

Military

MD-W-13855 - Weapons: Small Arms and Aircraft Armament Subsystems, General Specification for
MIL-P-14232 - Parts, Equipment and Tools for Army Materiel, Packaging and Packing of
MIL-I-45607 - Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-Q-45970 - Quality Assurance for Weapons and Support Materiel

STANDARDS

Federal

Fed. Std. No. 356 - Commercial Packaging of Supplies and Equipment

FSC 1005

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

Military

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes

MIL-STD-l09 - Quality Assurance Terms and Definitions

DRAWINGS

Rock Island Arsenal

F7790723 Mount, Tripod, Machine Gun, M122

(Product drawings referenced in this specification form a part of Drawing F7790723.)

PUBLICATIONS

Rock Island Arsenal

P7790723 - Packaging Data Sheet for Mount, Tripod, Machine Gun: M122

QE-G-DL7790723 - Quality Engineering Data List for Mount, Tripod, Machine Gun: M122

(Copies of specifications, standards, drawings and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

* 3.1 First article. Requirements for submission of the first article shall be as specified in the contract (see 6.1). Unless otherwise specified (see 6.1), the first article shall include the pilot pack (see 5.1).

3.2 Materials, construction and design. The tripod mount shall conform to the materials, construction and design requirments specified herein, on Drawing F7790723, and in MIL-w-13855.

3.2.1 Front leg assembly. The front leg assembly shall be ertained to the tripod head assembly by the bolt and shall pivot about the bolt throughout the full range of travel without binding.

3.2.2 Left rear leg assembly. The left rear leg assembly shall be retained to the tripod head assembly by the bolt and shall pivot about the bolt throughout the full range of travel without binding.

3.2.2.1 Left sliding sleeve. The left sliding sleeve shall slide on the left rear leg throughout the full range of travel without binding.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T03:20Z
Check the source to verify that this is the current version before use.

3.2.3 Right rear leg assembly. The right rear leg assembly shall be retained to the tripod head assembly by the bolt and shall pivot about the bolt throughout the full range of travel without binding.

3.2.3.1 Right sliding sleeve. The right sliding sleeve shall slide on the right rear leg throughout the fill range of travel without binding, except that it shall require manual forcing into locking position for a distance within the range specified on Drawing F7790723.

3,2.3.2 Sleeve latch. The sleeve latch shall rotate about the sleeve lock pin throughout the full range of travel, and when released shall return to its original position under spring action. The sleeve latch shall retain the right sliding sleeve in a locked position and shall release the right sliding sleeve when the sleeve latch is manually rotated.

3.2.4 Pintle. With the pintle lock body engaged in the groove of the pintle, pintle shall rotate in the pintle bushing throughout the full 360 degrees and there shall be no vertical movement.

3.2.5 Pintle lock group assembly. The pintle lock group assembly shall be securely retained to the tripod head assembly by the two screws without movement.

3.2.5.1 Pintle lock body. The pintle lock body shall be capable of engaging in the corresponding groove of the pintle, retaining the pintle, and remaining in this position by spring action. The pintle lock body shall be capable of being disengaged from the groove of the pintle by manually rotating the pintle lock release cam, and shall be capable of being held in the disengaged position by action of the pintle lock release cam.

3.2.5.2 Pintle lock release cam. The pintle lock release com shall be capable of rotating throughout the full range of travel.

3.2.6 Pintle assembly. The pintle assembly shall ProperlY engage the Pintle bushing in the tripod head assembly and be securely retained in the tripod head assembly by the pintle lock assembly. With the pintle lock assembly engaged in the groove of the pintle, the pintle assembly shall rotate freely 360 degrees and there shall be no vertical movement.

3.2.6.1 Latch. The latch shall be capable of being rotated about the pin throughout the fill range of travel, and when released shall return to its original position under spring action.

3.2.7 Traverse and elevating mechanism. The traverse and elevating mechanism shall assemble, be retained, and lock to the traversing bar as specified in Figure 1.

3.2.7.1 Elevating screw stop assembly. When the elevating screw stop assembly is in the relaxed position, it shall prevent the elevation

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

mechanism sleeve from being manually unscrewed from the lower elevating screw. The elevating screw stop assembly shall move throughout the fill range of travel, and when released shall return to its original position by spring action.

3.2.7.2 Micro elevating mechanism. The micro elevating mechanism shall have a minimum adjustment of 200 mils elevation and 200 mils depression. The elevating handwheel shall turn through the full range of adjustment (8 complete revolutions) and shall produce a perceptible click for each mil indication on the elevating handwheel.

3.2.7.3 Micro traversing mechanism. The mirco traversing mechanism shall have a minimum adjustent of 50 mils to the right and 50 mils to the left. The traversing handwheel shall turn through the full range of adjustment (b complete revolutions) and shall produce a perceptible click for each mil indication on the traversing handwheel.

3.2.7.4 Traversing slide lock lever assembly. The traversing slide lock lever shall be capable of being manually rotated throughout its full range of travel without binding.

3.2.7.5 Upper elevating screw stop assembly. The upper elevating screw stop assembly shall prevent the lower elevating screw from being manually unscrewed from the upper elevating screw.

-3.2.8 Traverse and elevating mechanism adapter assembly. The traverse and elevating mechanism adapter assembly shall be retained to the traverse and elevating mechanism by the pin and shall rotate about the pin throughout the fill range of travel without binding. The pin shall be retained by the retaining rings. The stud shall be capable of being depressed flush with or below the surface of the adapter and shall return to its original position by spring action.

3.2.9 Traversing bar assembly. The scale on the traversing bar shall be clear and legible and shall be accurately divided into the mil divisions specified on the applicable drawing. The sleeve latch shall hold the traversing bar in proper position when the mount is in firing position. The traversing bar assembly shall be adjusted in accordance with Drawing F7790723 to require manual forcing into the locked position in order to increase the rigidity of the mount when in firing position.

3.2.10 Interchangeability. Unless othewise specified on the drawing, all parts shall be interchangeable. Testing shall be as specified in 4.5.3.2.

3.3 Performance characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

3.3.1 Endurance. The tripod mount shall be capable of withstanding the machine gun firing of 10,000 rounds of Government standard ammunition (see 4.6.2.4) without mount malfunctions or unserviceable parts. Firing shall be accomplished using 100 round belts of cartridges in Ml3 links (see 4.6.2.5). Every other belt shall be fired in interrupted bursts with at least five intentional interruptions in firing. Each of the remaining belts shall be fired in one continuous burst. Testing shall be as specified in 4.5.3.3.

3.4 Marking. The tripod mounts shall be marked in accordance with MIL-w-13855.

3.5 Workmanship. The workmanship shall be in accordance with MIL-W-13855.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are cleaned necessary to assure supplies and servies conform to prescribed requirements.

* 4.1.1 The contractor shall perform, as a minimum, inspections in accordance with the specifications, quality assurance provisions, MIL-Q-45970 and the contract. These minimum inspections shall not be construed as relieving the contractor of his responsibilities under terms of the contract to furnish the Government with items complying with and conforming to the requirements of the contract, drawings and specifiecations.

4.2 Quality assurance terms and definitions. Quality assurance terms and definitions used herein are in accordance with MIL-STD-109.

4.3 Classification of inspection. The inspection requirements specified herein are as follows:

a. First article inspection (see 4.4).
b. Quality conformance inspection (see 4.5).

4.4 First article inspection. The first article (initial production unit(s)) shall be submitted for inspection in accordance with the contract (see 6.1). The first article shall be representative of the production processes to be used during quantity production. The first article shall be subjected to the quality conformance inspection specified herein and such other inspection as necessary to determine that all requirements of the contract have been met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

4.5 Quality conformance inspection.

4.5.1 Inspection lot. Unless otherwise specified (see 6.1), the formation, size and presentation of inspection lots shall be in accordance with MIL-STD-105 and MIL-W-13855. When Acceptable Quality Levels (AQL's) are specified, the AQL's shall be individually applied in accordance with MIL-STD-105.

4.5.2 Examination. Each mount shall be examined as specified in Table I. Mounts failing to meet the requirements shall be rejected.

TABLE I

EXAMINATION

Category	Requirement	Inspection Method
Materials, construction and design	3.2	Visual
Front leg assembly	3.2.1	Visual
Left rear leg assembly	3.2.2	Visual
Left sliding sleeve	3.2.2.1	Visual
Right rear leg assembly	3.2.3	Visual
Right sliding sleeve	3.2.3.1	Visual
Sleeve latch	3.2.3.2	Visual
Pintle	3.2.4	Visual
Pintle lock group assembly	3.2.5	Visual
Pintle lock body	3.2.5.1	Visual
Pintle lock release cam	3.2.5.2	Visual
Pintle assembly	3.2.6	Visual
Latch	3.2.6.1	Visual
Traverse and elevating mechanism	3.2.7	Visual.
Elevating screw stop assembly	3.2.7.1	Visual
Micro elevating mechanism	3.2.7.2	visual
Micro traversing mechanism	3.2.7.3	Visual
Traversing slide lock lever assembly	3.2.7.4	Visual
Upper elevating screw stop assembly	3.2.7.5	Visual
Traverse and elevating mechanism adapter assembly	3.2.8	Visual
Traversing bar assembly	3.2.9	SMTE, Visual
Marking	3.4	Visual
Workmanship	3*5	Visual

4.5.3 Testing.

* 4.5.3.1 Failure data. Unless otherwise specified herein, all tests shall be conducted on a complete tripod mount. If test requirements cited herein are not met, acceptance of the tripod mount shall be deferred and the contractor shall accomplish, as applicable, the following actions:

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

a. Conduct a failure analysis study performing a dimensional, physical and visual examination of the components which are suspected to be the cause of failure or malfunction.
b. Evaluate and correct the applicable production processes and procedures to prevent recurrence of the same defect(s) in future production.
c. Examine tripod mounts, partially assembled tripod mounts and components including components and sub-assemblies at in-process or final assembly to insure that material containing the same defect is purged from the inventory and not presented to the Government for acceptance.
d. Submit the results of the failure analysis and the corrective actions taken to the Government for review and approval prior to submitting a reconditioned lot or reconditioned tripod mount for retest.

4.5.3.2 Interchangeability testing.

4.5.3.2.1 In plant.

4.5.3.2.1.1 Mounts. The contractor shall test a sample of IO mounts, randomly selected from each month's production, for interchangeability (see 3.2.10) using the test method specified in 4.6.1.1.1. Mounts taken for interchangeability testing shall have been found satisfactory in all other examinations and tests. Failure of the interchangeability test shall cause retest or rejection of the represented lot. At the discretion of the Government representative, an interchangeability retest may be allowed without reconditioning the lot of mounts. Failure in the retest shall cause rejection of the represented lot subject to reconditioning and further test as a reconditioned lot. A sample of 20 mounts from each reconditioned lot shall be tested using the same procedure described above.

4.5.3.2.1.2 Concurrent repair parts. The contractor shall subject at least three parts from each inspection lot of concurrent repair parts to the interchangeability test (see 3.2.10) using the test method specified in 4.6.1.1.2. Failure of any part to meet the requirements shall be cause for rejection of the represented lot of parts subject to reconditioning and further test as a reconditioned lot. A sample of double the number of parts used in the original test shall be tested from each reconditioned lot using the test method specified in 4.6.1.1.2.

4.5.3.2.2 Interplant. When mounts are manufactured concurrently by more than one contractor, each contractor shall forward monthly six mounts, and a sufficient quantity of concurrent repair parts (if applicable) to assemble three mounts for the interplant interchangeability test specified in 4.6.1.2 (see 6.1). The contractor will be informed of the results of the test which indicate failure of the mounts or parts to meet prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

4.5.3.3 Endurance testing. The endurance test shall be conducted on one mount selected each month and tested until three consecutive mounts have met the requirements of 3.3.1 using test methods specified in 4.6.2. Mounts selected for endurance testing shall be one of the ten mounts. which has been determined to conform to the requirements of 4.5.3.2.1.1.

4.5.4 Inspection equipment. Unless othewise specified herin, responsibility for acquisition, calibration, maintenance and disposition of acceptance inspection and test equipment prescribed on Quality Engineering Data List QE-G-DL 7790723 and for all other inspection equipment required by applicable specifications, shall be in accordance with MIL-I-45607.

4.5.5 Parts inspection. Inspection of component parts and concurrent repair parts and subsequent assemblies shall be as specified herein (see 4.5.3.2.1.2 and 4.5.3.2.2) and in the contract (see 6.1). Inspection of parts shall be accomplished prior to assembly into the next higher assembly or end item.

* 4.5.6 Inspection of packaging. Unless otherwise specified, inspection to determine compliance with preservation, packing and marking requirements of the applicable packaging documentation, for the level designated in the contract, shall be as specified in MIL-P-14232.

4.6 Test methods.

4.6.1 Interchange of parts.

4.6.1.1 In plant.

4.6.1.1.1 Mounts. Mounts shall be tested for interchange of parts (see 3.2.10) by disassembling and then reassembling parts using parts and prearranged system prescribed in 4.6.1.1.1.1 and 4.6.1.1.1.2.

4.6.1.1.1.1 Parts to be subjected to the interchangeability test shall be as listed below:

Part Nomenclature	Part Number
Adapter assembly	779991
Bar, traversing assembly	5559333
Bolt	5169879
Bolt	5169880
Bolt	5169881
Bolt	5169882
Handwheel, traversing	6158375
Head, assembly w/pintle bushing 610820]	7790948
Leg assembly, front	6108195
Leg assembly, rear left	5559338
Leg assembly, rear right	5559337

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

Part Nomenclature (Continued)	Part Number
Lever, traversing slide lock, assembly	7793002
Lock, pintle, group assembly	6108986
Nut, locking, traversing scale	5171491
Pin, click, elevating mechanism	5171495
Pin, grooved, headless	772993
Pintle assembly	11010408
Plunger, stud	7792986
Scale, traversing mechanism	5171492
Screw, locking, traversing slide	5139988
Screw, pintle lock housing	5141590
Spacer, head, tripod	5139962
Spring, helical, compression	7792987
Spring, helical, compression	11010547
Spring, traversing slide lock	7793003
Traversing and elevating mechanism (with Handwheel-6158375, Nut-5171491, Scale-5171492 Lever-7793002, Spring-7793003, and Screw-5l39988 removed)	7791119

4.6.1.1.1.2 Interchange of parts shall be accomplished by any convenient method which shall insure that no mating parts in a reassembled mount shall be from the original mount. This shall be accomplished by dividing the above listed parts of each mount into ten groups of non-mating parts as shown below and distributing the groups into ten different trays until each tray contains a complete mount. Groups of parts from mount number 1 shall be taken in order and placed in trays 1 through 10; groups of parts from mount number 2 shall be taken in order and placed in trays 2 through 10 to 1; groups of parts from mount number 3 shall be taken in order and placed in trays 3 through 10 to 2; etc. Commercial parts such as screws, nuts, washers, pins, etc., shall be placed in the same tray as their mating or associate part. Any commercial part rendered unserviceable by disassembly shall be replaced without charge to the interchangeability test. The mounts shall be reassembled using only those parts which are in the same tray.

Groups of Non-Mating Parts

I. Adapter Assembly
Bolt (B5169879)

II. Bar, Traversing Assembly
Pin, Grooved, Headless
BOlt (B5169882)

III . Plunger, Stud
Screw, Pintle Lock Housing

IV. Handwheel, Traversing
Screw, Locking, Traversing
Slide

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T03:20Z
Check the source to verify that this is the current version before use.

Groups of Non-Mating Parts (Continued)

Vl	Head Assembly w/Pintle Bushing Traversing and Elevating Mechanism	VIII.	Leg AssemblY, Rear Left Scale, Traversing Mechanism Spring, Helical Compression (B11010547)
VI.	Pintle Assembly Spring Traversing Slide Lock Spring, Helical Compression (B7792987)	IX.	Leg Assembly, Rear Right Nut, Locking, Traversing Scale Bolt (B5169881)
VII .	Spacer, Head, Tripod Leg Assembly, Front Bolt (B569880)	x.	Lever, Traversing Slide Assembly Lock, Pintle, Group Assembly Pin, Click, Elevating Mechanism

4.6.1.1.2 Concurrent repair parts. Concurrent repair parts shall be tested for interchangeability requirement (see 3.2.10) by disassembling three mounts previously tested in 4.6.1.1.1, as necessary, and then reassembling them using concurrent repair parts. No hand refinement of parts will be allowed, and the mounts shall operate and function properly. This test may be performed independently of the mount interchangeability test specified in 4.6.1.1.1 and at more frequent intervals using accepted mounts taken From current production.

4.6.1.2 Interplant.

4.6.1.2.1 Mounts. Mounts which are to be subjected to the interplant interchangeability test shall be given preliminary hand functioning to assure proper operation before parts are disassembled from the mount. Mounts shall be interchanged in a manner similar to 4.6.1.1.2 except that parts shall be divided into eight groups and that when disassembling, every other mount used shall be one produced by a different manufacturer. After interchange of parts, the mount shall be examined for function of traverse and elevation micro adjustment mechanisms according to requirements specified in 3.2.7.2 and 3.2.7.3. Parts shall be identified with their manufacturer throughout the test. Before mounts are returned to the contractors, the original parts shall be reassembled to their respective mounts.

4.6.1.2.2 Repair parts. The concurrently manufactured repair parts submitted for tests shall be assembled in the mounts previously tested in 4.6.1.2.1 without handfitting or altering any part. Mounts shall be assembled using different combinations of parts to the extent deemed necessary to assure that parts are interchangeable.

4.6.2 Endurance test methods.

4.6.2.1 The mount to be tested for endurance (see 3.3.1), and the machine gun to be used in the test, shall be field stripped, lubricated,

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

and visually examined prior to the test. Testing shall be accomplished with the machine gun locked on the mount so that the line of sight and the front tripod leg are in approximately the same vertical plane. The feet of the tripod legs shall be in approximately the same horizontal plane and be held in place to prevent movement of the mount during firing. Firing shall be as specified in 3.3.1.

4.6.2.2 A total of 10,000 rounds shall be fired in the initial test mount from the first test lot regardless of the number of malfunctions or broken or unserviceable parts of the mount requiring replacement in order to complete the test. Records shall be kept showing each malfunction and part replacement, including the number of the round at which each occurred.

4.6.2.3 The machine gun shall be cooled to ambient temperature by air, or the barrel with biped assembly changed, after each 200 rounds of firing. The machine gun shall be cleaned and oiled after each 2000 rounds and at the close of each day's firing.

4.6.2.4 Government furnished standard 7.62mm, M60 machine gun shall be used for all firing during this test (see 6.1).

4.6.2.5 The ammunition and links used in this test shall be Government standard 7.62mm, M59 or M80 ball cartridges and M13 links (see 6.1).

5. PACKAGING

5.1 Pilot pack. A pilot pack shall consist of a complete tripod mount packaged in accordance with Packaging Data Sheet P7790723 for the level of protection specified in the contract (see 6.1), packed Level B and forwarded as specified in 3.1.

5.2 Levels A and B. Preservation, packing and marking shall be in accordance with Packaging Data Sheet P7790723 for the level of protection specified in the contract.

5.3 Commercial packaging. Preservation, packing and marking shall be in accordance with Fed. Std. No. 356.

5.4 Repair parts. Repair parts shall be preserved, packed and marked in accordance with the Packaging Data Sheet or other Packaging requirements, for the level of protection specified in the contract (see-6.1).

6. NOTES

6.1 Ordering data. Procurement documents should specify:

a. Title, number and date of this specification.
b. List of drawings, specifications and publications pertinent to the mount, showing applicable revision dates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

c. Number of samples required and shipping instructions for first article and pilot pack (see 3.1, 4.4 and 5.1).
d. Inspection lot size, if different (see 4.5.1).
e. Interplant interchangeability testing of concurrent repair parts (see 4.5.3.2.2).
f. Examination and testing criteria for component parts and concurrent repair parts (see 4.5.5).
g. Packaging examination and testing, if different (see 4.5.6).
h. Acquisition and disposition of 7.62mm, M60 machine gun, links, and ammunition (see 4.6.2.4 and 4.6.2.5).
i. Selection of applicable level of protection (A or B), or commercial packaging (see 5.1, 5.2 and 5.3).
j. Packaging instructions for repair parts (see 5.4).

6.2 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Army - WC
Air Force - 84

Preparing activity:
Army - WC


Project Number:
1005-0549

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

Position A - With lever manually positioned as indicated, the traverse and elevating mechanism capable of being assembled, and removed over the traversing bar.

Position B - Lever shall be retained in this position by spring, and traverse and elevating me shall move freely on traversing bar and shall not be capable of disassembly over

Position C - With lever manually positioned as indicated, traverse and elevating mechanism sha locked securely to traversing bar.

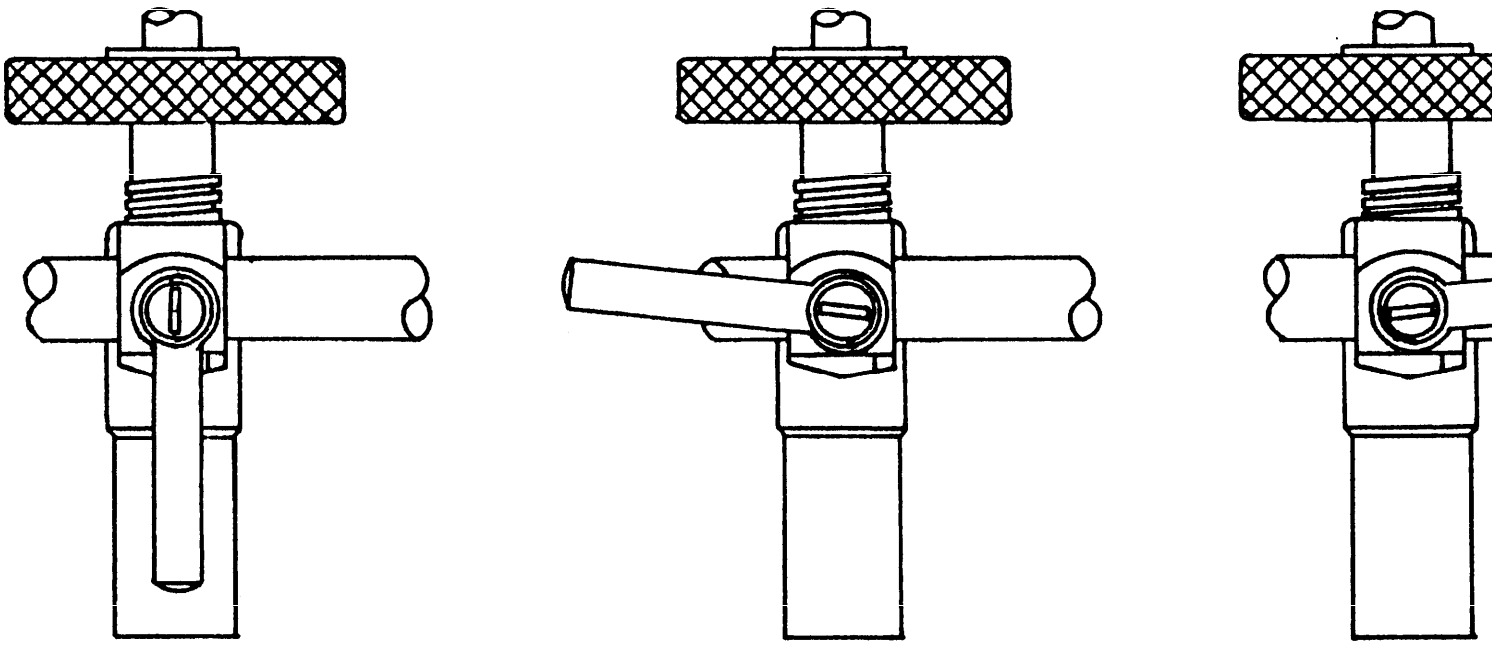

Position A Position B Position C

FIGURE 1. Assembling, retaining, and locking of traversing and elevating mechanism to traversing bar (sec 3.2.7).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-M-45532B; Mount, Tripod, Machine Gun: M122

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:20Z
Check the source to verify that this is the current version before use.