MIL-T-45539(WC)
30 JUNE 1963

SUPERSEDING
SAPD-204
1 OCTOBER 1961
SAPD-215
20 OCTOBER 1961

MILITARY SPECIFICATION

TRIGGERS, WINTER (FOR SMALL ARMS)

1. SCOPE

1.1 Scope. This specification covers winter triggers for installation as applicable on the M14, Ml, MIC, or MID rifles and the Rifle, Automatic, Browning, Cal .30, M1918A2, for use when wearing arctic gear.

1.2 Classification. Winter triggers shall be of the following models, as specified (see 6.2) :

Trigger, Winter: 7.62-MM Rifle, M5.
Trigger, Winter: Cal .30 Rifle, M6.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITAIZY

MIL-P-116 —Preservation, Methods of.
MIL-W-13855 —Weapons, Small Arms, General Specification for.
MIL-I-45208 —Inspection Requirements Genera] Specification for.

STANDARDS

MILITARY

MIL-STD-105 —Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-109 —Quality Assurance Terms and Definitions.

DRAWINGS

U. S. ARMY WEAPONS COMMAND

C7790808 —Trigger, Winter: 7.62-MM Rifle, M5.
C7790809 —Trigger, Winter: Cal .30 Rifle, M6.

PUBLICATIONS

U. S. ARMY WEAPONS COMMAND

P7790808 —Packaging Data Sheet for Trigger, Winter: 7.62 MM Rifle, M5.
P7790809 —Packaging Data Sheet for Trigger, Winter: Cal .30, Rifle, M6.

(Copies of specifications, standards, drawing% and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Initial production samples. On each contract 10 winter triggers representing initial production shall be forwarded free on board (f.o.b.) carrier's equipment, wharf, or freight station at a specified city or shipping point at or near contractor's plant to a testing agency designated by the procuring activity (see 6.2). Samples shall be representative of materiel which has been inspected and de-

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:21Z
Check the source to verify that this is the current version before use.

termined to be acceptable. The production sample of winter triggers shall be packaged in accordance with 5.1.

3.2 Materials and construction. Winter triggers shall conform to the material and construction requirements specified herein and on drawings referenced on Drawing C7790808 or C7790809, as applicable, and shall be in accordance with the applicable provisions of Specification MIL-W-13855,

3.3 Design. Winter triggers shall confom to the design specified herein and on drawings referenced on Drawing C7790808 or C7790809, as applicable, and shall be in accordance with the applicable provisions of Specification MIL-W-13855.

3.3.1 Functioning. The winter trigger shall actuate the rifle trigger to permit proper operation of the rifle when tested as specified in 4.3.3.3 and4.4.l. Thewinter trigger, -when positioned in alinement with the rifle trigger and depressed to fire the rifle, shall not bindon the trigger guard and shall cause the hammerer slide assembly, whichever is applicable, to be released. The released winter trigger shall not prevent the Rifle trigger from returning to forward position under spring pressure.

3.4 Marking. Each winter trigger shall be clearly marked in accordance with the applicable drawing and the marking provisions of Specification MIL-W-13855.

3.5 Workmanship. Workmanship shallbe in accordance with the workmanship requirements of Specification MIL-W-13855.

4. QUALITYASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his ownfacilitiesor any other commercial laboratoryacceptable tothe Government. TheGovernmentreserves the rightto perform anyof the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Contractor's kpectionsystent. The contractor shall provide and maintain an inspection system in accordance with Specification MIL-I-45208.

4.1.2 Quality asswance terms and definitions. Quality assurance terms and definitions used herein are in accordance with Standard MIL-STD-109.

4.2 Initial production sample inspection. Inspection of initial production samples (see 3.1) and initial production sample package (see 5.1) shall be performed at the designated testing agency. Initial production samples and initial production sample package shall be subjected to the examination and tests specified herein and such other inspection as is necessary to determine compliance with the requirements of the contract. The contractor will be informed of the results of any tests which indicate failure of the winter triggers to meet prescribed requirements.

4.3 Inspection provisions.

4.3.1 Inspection lot. The formation, size, and presentation of inspection lots of winter triggers and packaging shall be in accordance with Standard MIL-STD-105. Inspection lots shall be as large as practicable, in consideration of quality history, manufacturing conditions, and contractor's delivery schedule, and within the limitations of Specification MIP W-13855. Winter triggers shall be assembled from lots of component parts that have met all inspection requirements specified herein.

4.3.2 Examination. Examination of winter triggers and packaging shall be performed in accordance with 4.3.2.3 and the applicable inspection provisions of Specification MIL-W-13855.

4.3.2.1 Winter ttiggens. Sample size shall be in accordance with Standard MIL-STD-105, using inspection level II.

4.3.2.2 Packaging. Sample size shall be in

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:21Z
Check the source to verify that this is the current version before use.

accordance with Standard MIL-STD-105, using inspection level I.

4.3.2.3 Classifkationof defects. Classificationof defects and acceptable quality levels (AQL's) forexamination inaccordancewith Standard MIL-STD-105 shall be as specified herein and shall include the following provisions:

(a) The AQL listed for each defect shall be applied to the individual defect, not to a group of defects.

(b) Listings under "Dimension" are given only as an aid in locating surfaces specified.

(c) The presence of nicks, burrs, cracks, scratches, tool marks, deformations, missing operations, or other signs of poor workmanship on important areas of parts should be carefully considered. Samples should be carefully compared with a specimen of known acceptable quality.

(d) Examination for packaging defects specified in 4.3.2.3.2 shall apply to each winter trigger or container as applicable.

4.3.2.3.1 Triggers, winter: M5and M6.

4.3.2.3.1.1 Trigger, winter: 7.62-mm rifle, M5 (drawing C7790808). See 4.3.2.3.2 for examination of packaging.

Categories	Deject	AQL	Zns$ection method	Dimension
Critical:	None defined,			
Major:				
101	Missing or improperly assembled parts.	0.65	*Visual-Manual.	

· (Pins shall be riveted over securely. Trigger cam shall rotate freely. Hinge shall pivot freely through its full range of travel. The lever shall be securely welded. Screws shall be capable of passing through hole in Washcr and slots in hinge simultaneously. Washer shall be capable of assembly over hinge with tabs protruding above hinge. Serrations of washer shall nest with serrations i hinge without obstruction.)

102	Radii, trigger cam, over.	Lo	Visual	B7791209 51R –.02
Minor:				
201	Missing or improper protective coating. (Bright surfaces shall be touched up after riveting.)	1.5	Visual	
202	Missing or improper identification markings (nomenclature and part number).	1*5	Visual	1)7791211
203	Missing or improper serrations (hinge and washer).	1.5	Visual	C7791237 D7791212
204	Improper screwdriver slot (screws).	1.6	Visual	A7791416 .048 +.007 .037 +.013
206	Length overall, screws.	1.5	Visual	A7791415 ½ inch
206	Physical requirement not met (cam).	1.5	Rockwell Test.	B7791209 15N –90 min.
207	Length of slots, under (hinge).	1.5	Visual	D7791212 .625 +.030
208	workmanship.	4.0	Visual	(see 9.6)

4.3.2.3.1.2 Trigger, winter: cal.30 rifle, M6 (drawing C7790809). See 4.3.2.3,2 for examination of packaging.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:21Z
Check the source to verify that this is the currentversion before use.

Categories	Defect	AQL	Inspection method	Dimension
Critical:	None defined.			
Major:				
101	Missing or improperly assembled parts,	0.66	*Visual-Manual.	
	. (Pin shall be riveted over securely. Hinge shall pivot freely through its full range of travel. The lever shall be securely welded. Screws shall be capable of passing through hole jn washer and slots in hinge simultaneously. Washer shall be capable of assembly over binge with large tabs protruding above hinge, Serrations on small tabs of washer shall nest with serrations in hinge without obstruction. Cam pin shall be securely retained at assembly and shall be capable of disassembly when compressed. Trigger cam shall rotate freely.)			
102	Radii, trigger cam, over	1.0	Visual	C7791214 .70R –.01
Minor:				
201	Missing or improper protective coating. (Bright surfaces shall be touched up after riveting.)	1.5	Visual	
202	Missing or improper identification markings (nomenclature and part number).	1.5	Visual	D7791215
203	Missing or improper serrations (hinge and washer).	1.5	Visual	C7791237 D7791216
204	Improper screw driver slot (screws).	1.5	Visual	A779145 .48 +.007 .037 +.013
205	Length overall, screws.	1.5	Visual	A7791415 ½ inch
206	Physical requirement not met (cam).	1.6	Rockwell Test	C7791214 15N –90 min.
207	Length of slots, under (hinge).	1.5	Visual	D7791216 .400 Basic 26″ Basic 21° Basic .076 +.015
208	Workmanship.	4.0	Visual	(See 3.5)

4.3.2.3.2 Packaging. (Unless otherwise specified in each listed defect, the packaging requirements are specified in Packaging Data Sheet P7790808 or P7790809, as applicable.)

Categories	Defect	AQL
Critical:	None defined,	
Major:		
101	Illegible or incorrect marking.	1.0
102	Improper level or packaging or packing (see procurement documents).	1.0
108	Inadequate cleaning and drying.	1.5
104	Improper preservative application and drainage,	1.5
105	Improper wrapping.	1.5
106	Improper closure of interior packages	1.5
107	Improper containers.	1.5
108	Improper closure and strapping of shipping containers.	1.5
Minor:		
201	Workmanship (see 6.3).	4.0

4.3.3 Testing. In addition to the applicable test provisions specified in Specification MIL-W-13855 and other tests required by applicable drawings and specifications, the following tests shall apply. Unless otherwise specified herein, tests shall be performed on samples taken from each inspection lot. Test fixtures and equipment shall be in accordance with Government drawings or, in the absence of drawings, shall be approved by the procuring agency.

4.3.3.1 Material testing. Tests required by applicable drawings and specifications shall be performed on materials used in the manufacture of winter triggers. The contractor shall furnish the Government representative certified copies of chemical and check analyses and reports of physical tests as may be required for each lot of each material used. The contractor shall also furnish the Government representative certification that the materials used in packaging conform to the applicable specifications.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:21Z
Check the source to verify that this is the current version before use.

4.3.3.2 Accelerated corrosion testing. Accelerated corrosion testing shall be made in accordance with applicable drawings and specifications.

4.3.3.3 Functioning testing. Samples of winter triggers shall be taken from each inspection lot in accordance with Standard MIL-STD-105 using inspection level L4, and shaIl be tested by the contractor using the test method specified in 4.4.1. Acceptance shall be based on an AQL of 0.65 percent defective.

4.3.3.4 Determination of cleanliness testing. Winter triggers shall be tested by the contractor for cleanliness using the test methods specified in .4.2. Sampling shallbe in accordance with Specification MIL-P-116.

4.3.4 Inspection equipment. Unless otherwise specified in procurement documents (see 6.2), responsibilities for acquisition, maintenance (including calibration of standards), and disposition of acceptance inspection equipment shallbe in accordance with Specification MIL-I-45208. Use of the contractor's or Government furnished inspection equipment, when desired by the Government representative shall be permitted without charge.

4.4. Test methods.

4.4.1 Functioning test. Each sample winter trigger shall be tested for functioning requirement (see 3.3.1) by installation without using screws (7791415) and washer (7791237) on an unloaded rifle ofknown acceptance. The rifle stock shall remodified by the contractor in accordance with figure 1 or 3, as applicable, and approved by the Gov. ernment. See figure 2 0r 4, as applicable,for suggested method of securing winter trigger to riflefor conducting functioning test. The trigger mechanism shall be cocked and the winter trigger depressed manually causing the hammer or slide assembly, whicheveris applicable, to be released. This procedure shall be performed on each sample a minimum of three times,

4.4.2 Determination of cleanliness test. The sample winter triggers shall be subjected to the determination of cleanliness test in accordance with Specification MIL-P-116.

5. PREPARATION FOR DELIVERY

5.1 Initial production sample packaging. Initial production samples shallbepackaged in accordance with the contract and Packaging Data Sheet P7790808 or P7790809, as applicable, When Kit, Winter Trigger, M5, 5910520 or M6, 5910521, as applicable, is procured packaging shall be in accordance with procurement documents (see 6.4).

5.2 Preservation, packaging, packing, and marking. Winter triggers M5 and M6 shall be preserved, packaged, packed, and marked in accordance with the requirements of Packaging Data Sheet P7790808 or P7790809, respectively, for the applicable level of protection specified (see 6.2).

5.3 Workmanship. Adequate controls shall be utilized to check for contamination of cleaning solvents and preservative. Sealing tape shall be applied to boxes uniformly and shall adhere to joints and seams.

6. NOTES

6.1 intended use.

6.1.1 Trigger, Winter: 7.62-MM Rifle, M5 is for use in conjunction with the Safety, Winter, Drawing C7790903 when installed on the M14, Ml, M1C, or MID Rifles.

6.1.2 Trigger, Winter: Cal.30Rifle, M6is for use in conjunction with the Lever, Change, Winter, Drawing F7790904 when installed on the Rifle Automatic, Browming, Cal .30, M1918A2,

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Lists of drawings and specifications pertinent to the Winter Trigger on order, showing applicable revision dates.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:21Z
Check the source to verify that this is the current version before use.

(c) Shipping instructions for initial production samples (see 3.1 and 5.1).

(d) Selection of applicable levels of preservation, packaging, and packing (see 5.2).

(e) Quantities pershipping container if other than specified (see Packaging Data Sheet P7790808 or P7790809, as applicable).

(f) Place of final inspection and acceptance (see "Notes" in Specification MIL-W-13856).

(g) Responsibility for furnishing applicable rifle for functioning test ' (see4.4.1).

(h) Disposition of Government furnishedproperty.

(i) Responsibilities for acquisition, maintenance, and disposition of acceptance inspection equipment, ifother thanspecified (see4.3.4).

6.3 When action by a testing agency is required, work programing will be effected with the testing agencyat the earliest practicable date.


6.4 Winter trigger kits. When the M5 Winter Trigger is packaged with Safety, Winter, Drawing C7790903, to form Kit, Winter Trigger, M5 or the M6 Winter Trigerispackaged with Lever, Change, Winter, Drawing F7790904, to form Kit, Winter Trigger, M6 they should be in accordance with Packaging Data Sheet P5910520 or P591052I, as applicable. Winter trigger kits should be preserved, packaged, packed, and marked in accordance with the requirements of Packaging Data Sheet P5910520 or P5910521, as applicable, for the applicable level of protec tion specified.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Governmentmay have formulated, furnished, or in anyway supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army -WC

Preparing activity:
Army—WC
Project 1005-A174Y


Source: https://assist.dla.mil -- Downloaded: 2026t0-22T03:21Z
Check the source to verify that this is the currentversion before use.

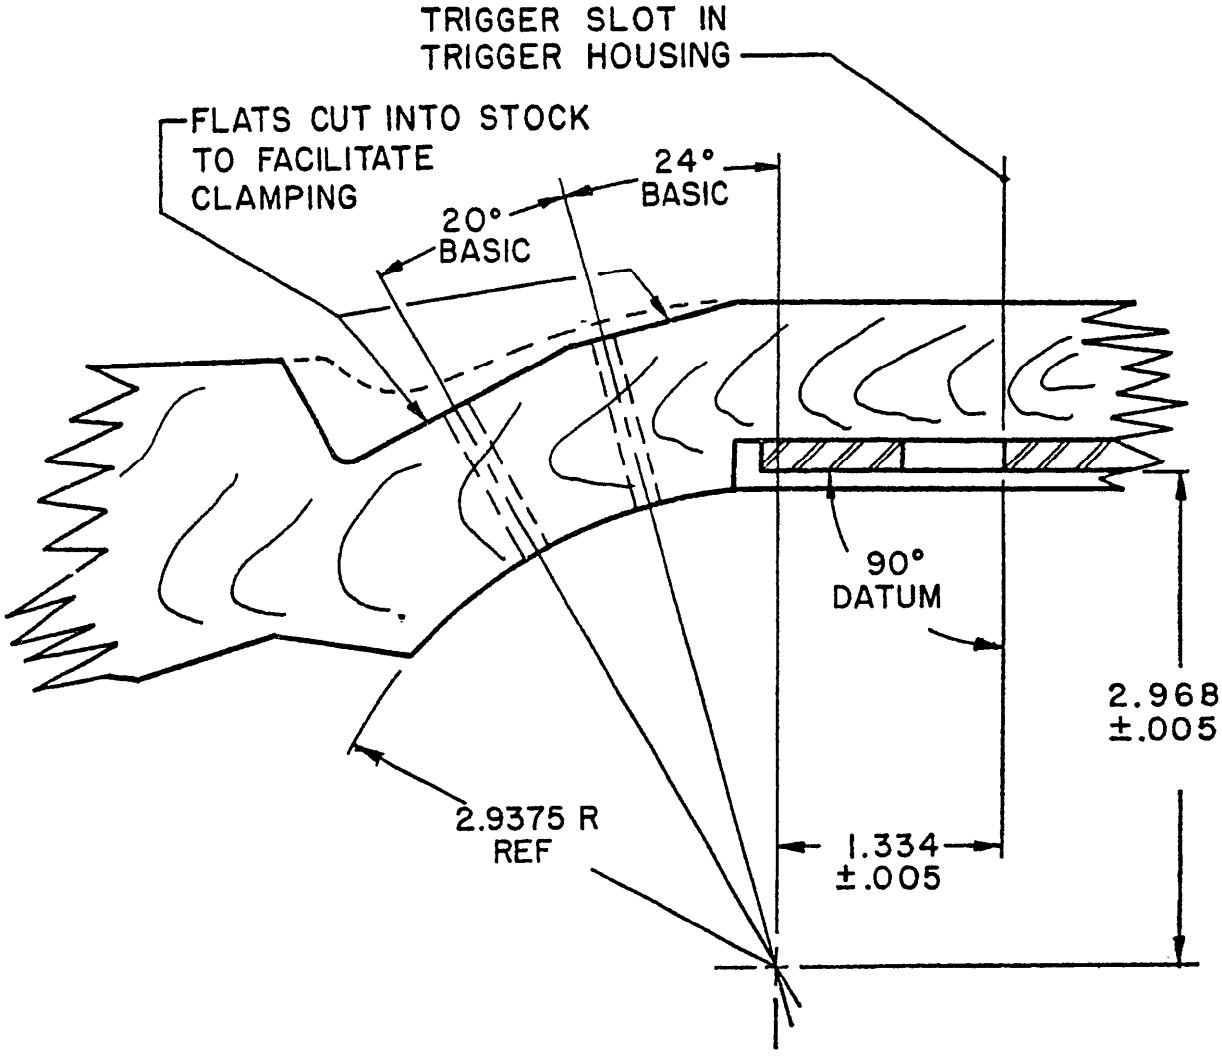

NOTE: SEE FIGURE 2 FOR METHOD OF SECURING WINTER TRIGGER TO MODIFIED STOCK.

FIGURE 1. *Stock modification for testing the trigger, winter: 7.62-mm rifle, M5.*


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:21Z
Check the source to verify that this is the current version before use.

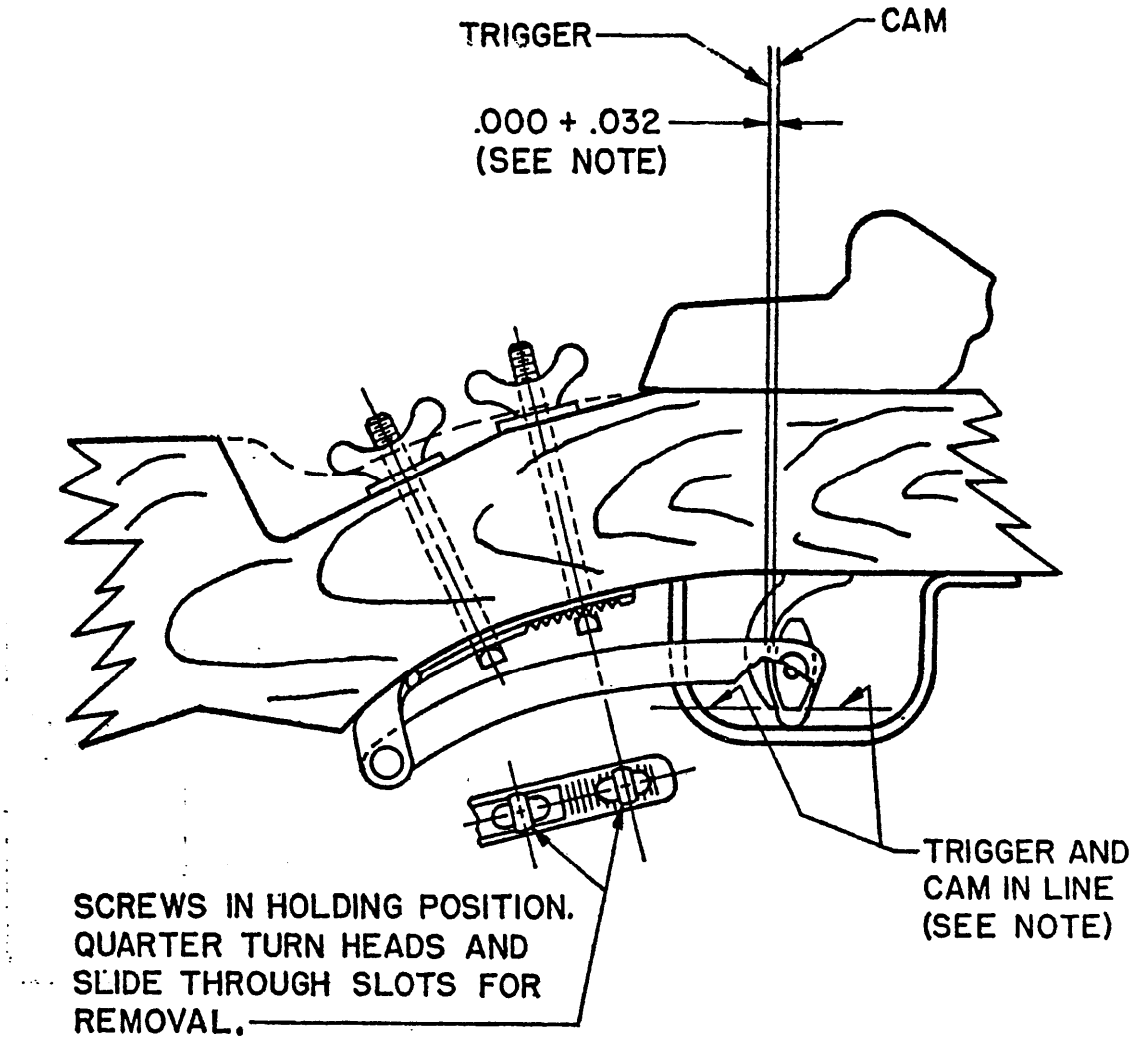

NOTE: DIMENSION APPLIES WITH HAMMER IN FIRED POSITION AND WITH BOTTOM OF CAM (7791209) IN LINE WITH BOTTOM OF RIFLE TRIGGER AS SHOWN.

FIGURE 2. *Method of securing trigger, winter: 7.62-mm rifle, M5 (7790808) to modified stock for conducting functioning test.*


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:21Z
Check the source to verify that this is the current version before use.

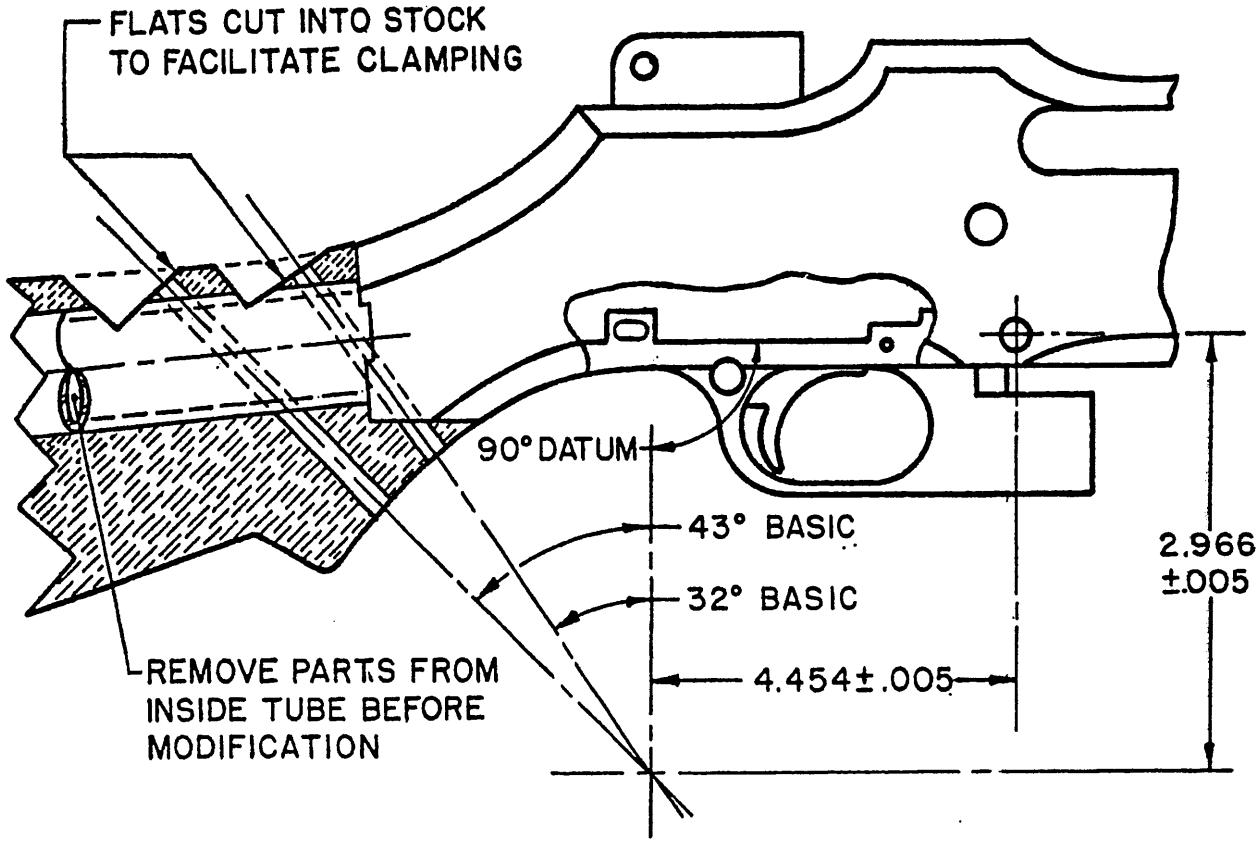

NOTE: SEE FIGURE 4 FOR METHOD OF SECURING WINTER TRIGGER TO MODIFIED RIFLE.

FIGURE 3. *Rifle modification for testing the trigger, winter: cal .30 rifle, M6.*

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:21Z
Check the source to verify that this is the current version before use.

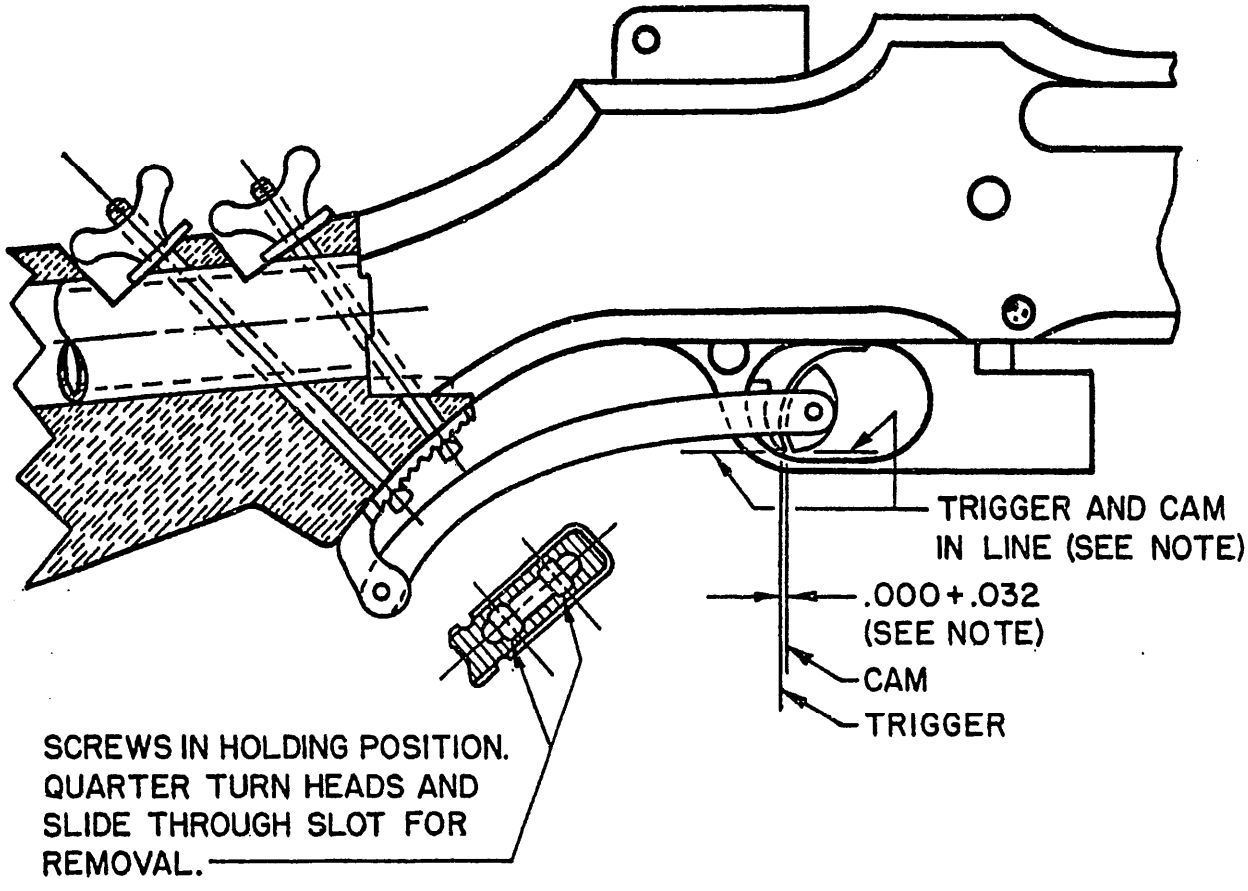

NOTE: DIMENSION APPLIES WITH BOTTOM OF CAM (7791214) IN LINE WITH BOTTOM OF RIFLE TRIGGER AS SHOWN.

FIGURE 4. *Method of securing trigger, winter: cal .30 rifle, M6 (7790804) to modified rifle for conducting functioning test.*

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:21Z
Check the source to verify that this is the current version before use.