INCH POUND

MIL-T-45549D(AL)
22 September 1993
SUPERSEDING
MIL-T-45549C(AL)
18 February 1988

MILITARY SPECIFICATION

TABLE, FOLDING LEGS, AUTOMOTIVE MAINTENANCE

This specification is approved for use by the US Army Armament Research, Development and Engineering Center, Department of the Army and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type and size of worktable with a steel top and folding legs.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and drawings. The following specifications, standards, and drawings form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DoDISS) and supplement thereto, cited in the solicitation (see 6.2.1).

SPECIFICATIONS

FEDERAL

PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-P-116 - Preservation, Methods of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research, Development and Engineering Center, ATTN: SMCAR-EST-P, Rock Island, IL 61299-7300 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 4910
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

MIL-A 250 - Adhesive, Water-Resistant (For Closure of Fiberboard Boxes)
MIL-19644 - Plastic Molding, Material (Polystene Foam, Expanded Bead)

STANDARDS

FEDERAL

FED-STD-H28 - Screw-Thread Standards for Federal Services
FED-STD-595 - Colors

MILITARY

MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of US Military Property
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking and Waterproofing; with Appropriate Test Methods
MIL-STD-1190 - Minimum Guidelines for Level C Preservation, Packing and Marking

(Unless otherwise indicated, copies of federal and military specifications and standards are available from the DoDSSP, Standardization Document Order Desk, 700 Robbins Avenue, Bldg 4D, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2.1).

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM A108 - Steel Bars, Carbon, Cold Finished, Standard Quality
ASTM A575 - Steel Bars, Carbon, Merchant Quality, M-Grades
ASTM A576 - Steel Bars, Carbon, Hot Wrought, Special Quality
ASTM A663 - Steel Bars, Carbon, Merchant Quality, Mechanical Properties

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Nongovernment standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. When specified in the contract or purchase order, a sample shall be subject to first article inspection (see 4.3 and 6.2.1).

3.2 Design. The maintenance table shall be designed in accordance with Figures 1 and 2 and as specified herein. Steel used to fabricate the table shall comply with the requirements of ASTM A108, A575, A576, or A663.

3.2.1 Reclaimed materials. The contractor is encouraged to use reclaimed materials for fabricating new parts without jeopardizing the chemical and physical properties, design integrity, and intent of the materials originally selected or specified. The reclaimed materials shall have been reprocessed, remanufactured, or recycled in a manner that shall restore them to the same chemical composition and physical properties as the materials originally selected for use. It shall not be permissible to use reclaimed parts as is, or rebuilt from scrap or other used equipment.

3.3 Construction.

3.3.1 Welding, brazing, and soldering. Welding, brazing, and soldering shall be of a quality which shall sustain the performance requirements of the welded, brazed, or soldered part. These operations, however, shall not be employed as repair measures for defective parts.

3.3.2 Interchangeability. All replaceable parts shall be designed and manufactured to such standards as shall permit replacement and adjustment without the need for modification of the parts or the table. Where practical, replaceable parts shall be marked with the manufacturer's part number as specified in MIL-STD-130.

3.3.3 Threads. Threads shall conform to FED-STD-H28 and the applicable Detailed Standard section referenced therein.

3.3.4 Surfaces. All surfaces of all castings, forgings, stampings, and welded parts shall be clean and free from extraneous materials. External surfaces shall be smooth and all edges shall be free from burrs and sharp edges.

3.3.5 Fastening devices. All screws, pins, bolts, and similar parts shall be installed with means for preventing loss of tightness. When subject to removal or adjustment, these parts shall not be swaged, peened, staked, or otherwise permanently deformed. Screws, bolts, nuts and washers shall be either zinc coated or cadmium plated.

3.4 Painting. Unless otherwise specified (see 6.2.1), painting of the table shall be as specified herein. All surfaces to be painted shall be clean and free of grease, oil, scale, dirt, rust, and other extraneous material. The table shall be painted with one coat of primer and two coats of enamel. The finished color shall be number 24087 of FED-STD-595.

3.5 Product identification. The table shall be marked for product identification in accordance with MIL-STD-130 and, unless otherwise specified (see 6.2.1), shall include the National Stock Number.

3.6 Product characteristics.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

3.6.1 Stability, surface flatness, load deflection, and permanent set. The table, when fully assembled and standing in a normal work position on a surface which is level and flat (with not more than .06 inch total accumulated variation), shall comply with the following requirements:

a. The table shall be capable of four-legged contact with the surface described above.
b. The table top surface shall have not more than 3/16 inch total accumulated variation from flatness.
c. The table top shall not deflect more than 5/8 inch when subjected to a proof load of 3,000 pounds dead weight (shot-filled bags or equivalent) evenly distributed over the entire surface of the table top.
d. The table top shall not show a permanent set of more than 1/8 inch after having been subjected to the condition in (c) above for a continuous period of eight hours. Table legs, stringers, and other component parts shall show no evidence of distortion, deformation or damage.

3.6.2 Table weight. The fully assembled table shall not weigh more than 200 pounds.

3.7 Details of components. Dimensions and configuration of the table shall be as shown in Figures 1 and 2.

3.7.1 Table top. The table top shall be fabricated of sheet steel having a nominal thickness of not less than Steel Manufacturers' Standard (SMS) Gage No. 11. Steel reinforcing members shall be welded to the underside of the table to assure flatness and structural strength. A suitable device(s) shall be welded to the underside of the table to lock the folded legs to the top during transport and stowage. The device shall allow manual operation of locking, folding, and releasing the table legs.

3.7.2 Table legs. The table top shall be supported by legs constructed of steel having a nominal thickness not less than SMS Gage No. 14. The legs shall be permanently attached to the table top by a continuous hinge welded across the complete width of the upper cross member and to the top. The bottom of each leg shall end in a flange or base plate to provide a minimum floor-bearing surface of 12 square inches. The flange or base plate may be formed as part of the leg or attached by welding. The hinged table legs shall not overlap when folded for stowage. The total thickness of the table, when folded for stowage, shall not exceed seven inches.

3.7.3 Stringers. The unfolded table legs shall be braced by two removable stringers running along each long side of the table from leg to leg. Each end of each stringer shall be attached to a leg by four removable bolts of not less than 5/16 inch in diameter. Nuts shall be permanently welded over stringer holes to receive the bolts. Stringers shall not be less than 5 inches in width and shall be of formed sheet steel having a nominal thickness of not less than SMS Gage No. 14.

3.8 Workmanship. Standards of workmanship shall assure that the table shall have the stability, safety, and operating characteristics found in commercial units and as specified in Section 3 herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, or purchase order,the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective materiel, either indicated or actual, nor does it commit the Government to acceptance of defective materiel.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When specified (see 6.2.1), first article inspection shall be applied to the preproduction model or initial production item (see 3.1). Unless otherwise specified (see 6.2.1), first article inspection shall consist of the examination in 4.5 and all tests under 4.6. Failure of the first article to pass the examination or any of the tests shall be cause for rejection.

4.4 Quality conformance inspection. Quality conformance inspection shall be applied to production items offered for acceptance under the contract. Unless otherwise specified (see 6.2.1), quality conformance inspection shall consist of (a) through (d) below. Failure of any item to pass an examination or test shall be cause for rejection of the item.

a. Product examination (see 4.5).
b. Stability test (see 4.6.1).
c. Surface flatness test (see 4.6.2).
d. Packaging inspection (see 4.7).

4.4.1 Sampling. Sampling for quality conformance inspection shall be performed as listed with all samples selected randomly.

Inspection or test	Lot or batch size	Sample size
Product examination (see 4.5)	1-150	13
Performance test (see 4.6.1)	1-150	13
Surface flatness test (see 4.6.2)	1-150	13
Packaging inspection (see 4.7)	1-150	7

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

The lots shall not exceed the maximum sizes indicated above. If lot size is less than or equal to sample size, 100% inspection is required. Each lot shall be accepted with no defects and rejected if one or more defects are found.

4.5 Product examination. Visually, dimensionally, and manually examine each table to determine conformance with 3.2 through 3.5 and 3.7 through 3.8. Visual examinations shall include verification of completeness of manufacture and assembly, conformance to specified standards, adequacy of markings, proper cleaning, and freedom from the identified defects. Manual examinations shall include the operation of movable parts by hand to assure proper functioning. The examination provisions may be applied at the earliest practical point of manufacture at which it is feasible to inspect for acceptance without risk of change in the characteristic by subsequent operations. Failure of the contractor to provide objective evidence that the table and its components have passed the examinations prescribed for them by the contractor's inspection system shall be cause for rejection. In addition, failure of the contractor to provide objective evidence that all parts are manufactured to definite standards, clearances, and tolerances so that no replacement part will degrade the form, fit, or function of the end item (see 3.3.2), shall be cause for rejection.

4.6 Tests.

4.6.1 Stability. The fully assembled table shall be placed on a flat level surface (see 3.6.1). The table shall be capable of four-legged contact with the surface to determine compliance with 3.6.1(a). No rocking shall be permitted.

4.6.2 Surface flatness. The table top shall be checked with a straight edge placed across the table top along the length, along the width, and diagonally from corner to corner, to determine compliance with 3.6.1(b).

4.6.3 Load deflection. Initial measurements between the edges of the table top and the flat surface shall be established at not less than three points along each of the two long edges. At least one measurement shall be established between the center of the table top and the flat surface. A load of 3,000 pounds of dead weight, as specified in 3.6.1(c), shall then be evenly distributed over the entire surface of the table top. The table top shall then be remeasured between the same points used to obtain the initial measurements to determine compliance with 3.6.1(c).

4.6.4 Permanent set test. The table shall be subjected to the conditions in 4.6.3 except that the table shall maintain the 3,000 pound load for a period of 8 hours. The load shall then be removed before the secondary measurements are established and examination made to determine compliance with 3.6.1(d).

4.6.5 Table weight. One table from each order or contract shall be weighed, to verify conformance with 3.6.2.

4.6.6 Folding test. One table from each order or contract shall be folded for storage, to demonstrate conformance to the folding requirement in 3.7.2.

4.7 Packing inspection. The tables shall be inspected before and after packaging to determine compliance with the preservation, packing, packing, and marking requirements of Section 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Disassembly. When practical, items shall be disassembled to afford protection of components, attachments, and accessories against damage, pilferage and to reduce cubage. Disassembled parts shall be clearly and legibly marked as to identity and proper location on the assembled item and matchmarked when necessary to facilitate reassembly. Removed parts and mating parts on the item shall be matchmarked by stenciling on the part or by the use of tags. Tags shall be waterproof and ink used shall be waterproof. Tags shall be firmly secured to each individual part. All fasteners removed during disassembly shall be reinstalled in one of the mating parts. A part shall not be dissasembled unless it can be readily assembled in the field without special skills or tools.

5.2 Preservation. Preservation shall be Level A or Level C, as specified (see 6.2.1).

5.2.1 Level A.

5.2.1.1 Cleaning and drying. Thorough cleaning and drying of all bare surfaces is essential before the application of a preservative. Cleaning, drying and application of preservatives shall progress in a uninterrupted series of operations. When periods of interruption are necessary, temporacy protection shall be provided to partially processed items, as required, to insure against contamination. The materials used in cleaning, drying and preservation shall not be injurious to the tables. Cleaning shall be in accordance with method C-1 of MIL-P-116 except that no Class 1 ozone depleting substances (see 6.3) shall be used. Drying shall be accomplished by any applicable means stated in MIL-P-116.

5.2.1.2 Preservation. Immediately after cleaning and drying. Surfaces that are subject to corrosion or deterioration shall be treated with a P-type preservative. Preservation shall be in accordance with any applicatble method of MIL-P-116 except that preservatives such as P-1, P-2, P-3, P-19 and P-21 shall not be used. Excessive use of preservative comppounds shall be avoided. Preservative compounds shall not be applied to corrosion resistant metal or metal that is treated or painted to resist corrosion.

5.2.1.3 Technical data. Technical data furnished shall be place in a waterproof, greaseproof bag, sealed and attached to the table or placed in the box containing the table.

5.2.2 Level C. Tables shall be preserved in accordance with MIL-STD-1190.

5.3 Packing. Packing shall be level A, B, or C, as specified (see 6.2.1).

5.3.1 Level A. Before being packaged in the shipping container, cushioing shall be applied to prevent marring, puncturing, damage or any abrasive action to the finished surfaces or protruding parts. All cushioning material shall be secured by taping or tying to prevent any possibility of shifting or becoming detached during transit and storage. Cushioning material shall be not less than 3/4 inch thick fabricated in the form of pads or blankets, and made of fiberboard. Disassembled parts, accessories and attachments, shall be consolidated, cushioned to prevent damage and packed in fiberboard boxes conforming to PPP-B-636 class WWVR. Federal Specification MMM-A-250 in PPP-B-636 is not authorized for use in the packaging process. The boxes shall be sized to fit the parts being packed. Size and weight limitations of the container specification shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

5.3.2 Shipping container. The table and its associated items shall be packed in a shipping container conforming to PPP-B-601 or PPP-B-621, overseas type. Selection shall be governed by the size and weight limitations of the container specification. The shipping container shall be provided with forklift, capabilities. Each shipping container shall contain only one table and all associated items.

5.3.3 Level B. Unless otherwise specified (see 6.2.1), Level B requirements will be the same as Level A, except the shipping container shall be the domestic type.

5.2.4 level C. Tables shall be packed in accordance with the requirements of MIL-STD-1190.

5.4 Marking. Marking shall be in accordance with the MIL-STD-129.

5.5 Contents. For the intermediate and shipping containers the arrangement of contents, cushioning, anchoring, blocking and bracing shall be in accordance with MIL-STD-1186 except delete (MIL-P-19644) in paragraph 5.3.3 and delete (or P-1 of MIL-P-116) in paragraph 5.4.1.

5.6 Rough handling. The shipping container and all contents shall be capable of withstanding the shipping and handling conditions expected from fork lift handling and truck transport. The container, its contents and the packaging shall not be damaged, functionally or physically, or items displaced by the appropriate rough handling.

5.4 Workmanship. The quality of work shall be such that when proper procedure is followed, materials and equipment being processed will be provided the maximum protection against corrosion and deterioration consistent with the shipment hazards known or anticipated, and suitable for long term storage.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The table covered by this specification is intended for use as a general purpose worktable that can be stowed and transported to work areas by mobile maintenance shops.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DoDISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).
c. First article when required (see 3.1).
d. Painting if different (see 3.4).
e. Product marking if different (see 3.5).
f. First article inspection if different (see 4.3).
g. Quality conformance inspection if different (see 4.4).
h. Preservation and packing as required (see 5.2 and 5.3 respectively).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

6.2.2 Contract data requirements. Required technical data such as operator's manuals, parts lists, and other instructions for operations and maintenance, as identified on a numbered DD Form 1664, should be specified on a DD Form 1423 incorporated in the contract.

6.3 Ozone depleting substance. Section 602(a) of the Clean Air Act as amended in 1990, (42 U.S.C. 7671a(a)) defines Class 1 Ozone Depleting substances as follows:

chlorofluorocarbon-11 (CFC-11)
chlorofluorocarbon-12 (CFC-12)
chlorofluorocarbon-113 (CFC-113)
chlorofluorocarbon-114 (CFC-114)
chlorofluorocarbon-115 (CFC-115)
halon-1211
halon-1301
halon-2402
chlorofluorocarbon-13 (CFC-13)
chlorofluorocarbon-111 (CFC-111)
chlorofluorocarbon-112 (CFC-112)
chlorofluorocarbon-211 (CFC-211)
chlorofluorocarbon-212 (CFC-212)
chlorofluorocarbon-213 (CFC-213)
chlorofluorocarbon-214 (CFC-214)
chlorofluorocarbon-215 (CFC-215)
chlorofluorocarbon-216 (CFC-216)
chlorofluorocarbon-217 (CFC-217)
carbon tetrachloride
methyl chloroform

6.4 Subject term (key word) listing.

Worktable
Steel top
Folding legs

6.5 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


Custodian:
Army - AL

Review activities:
Army - ME
DLA - CS

Preparing activity:
Army - AL

Project No. 4910-A763

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

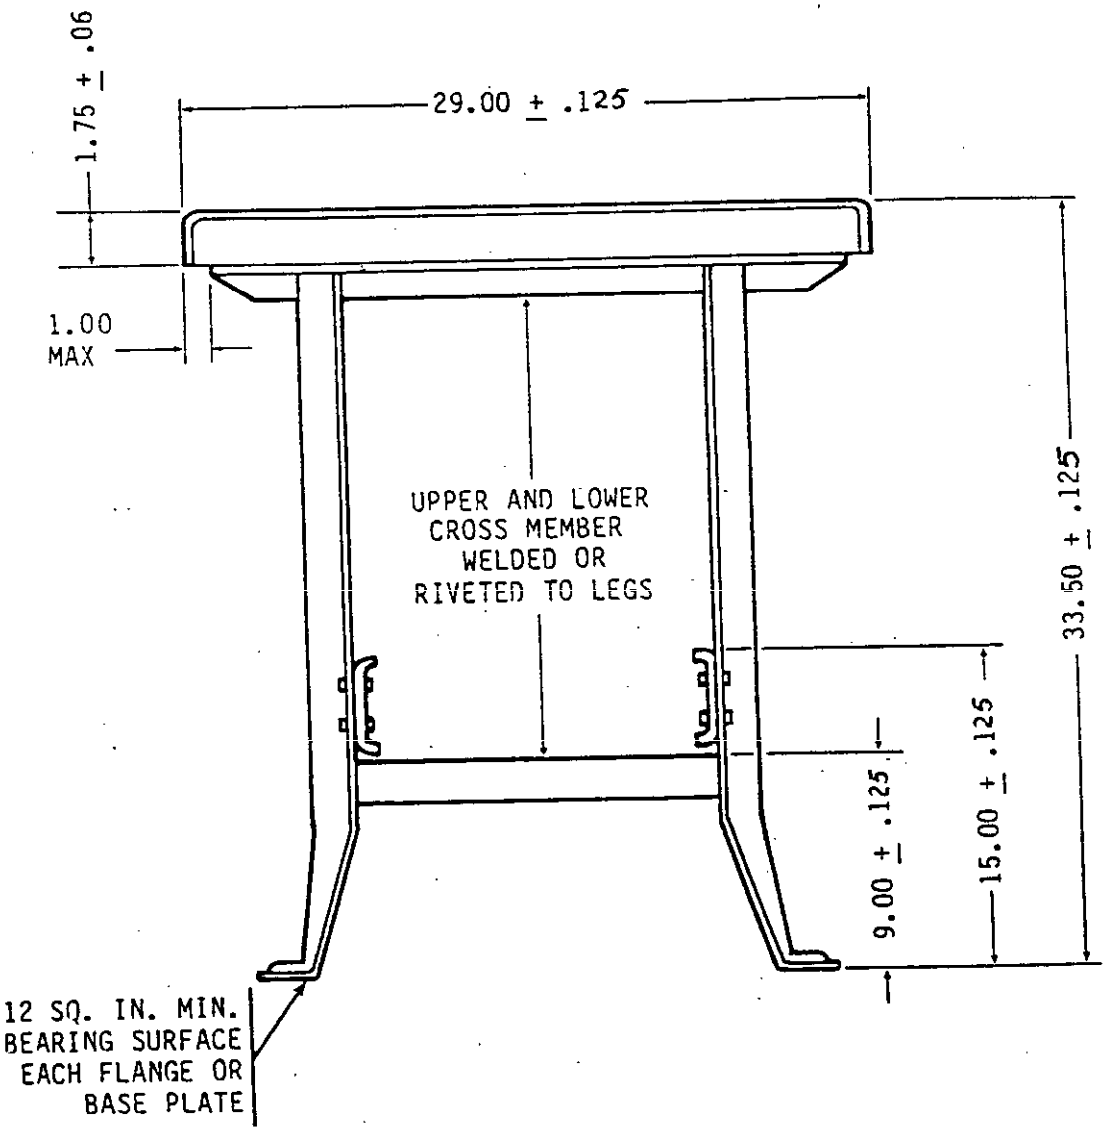

Note: All dimensions are in inches.

Figure 1. End view of assembled table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

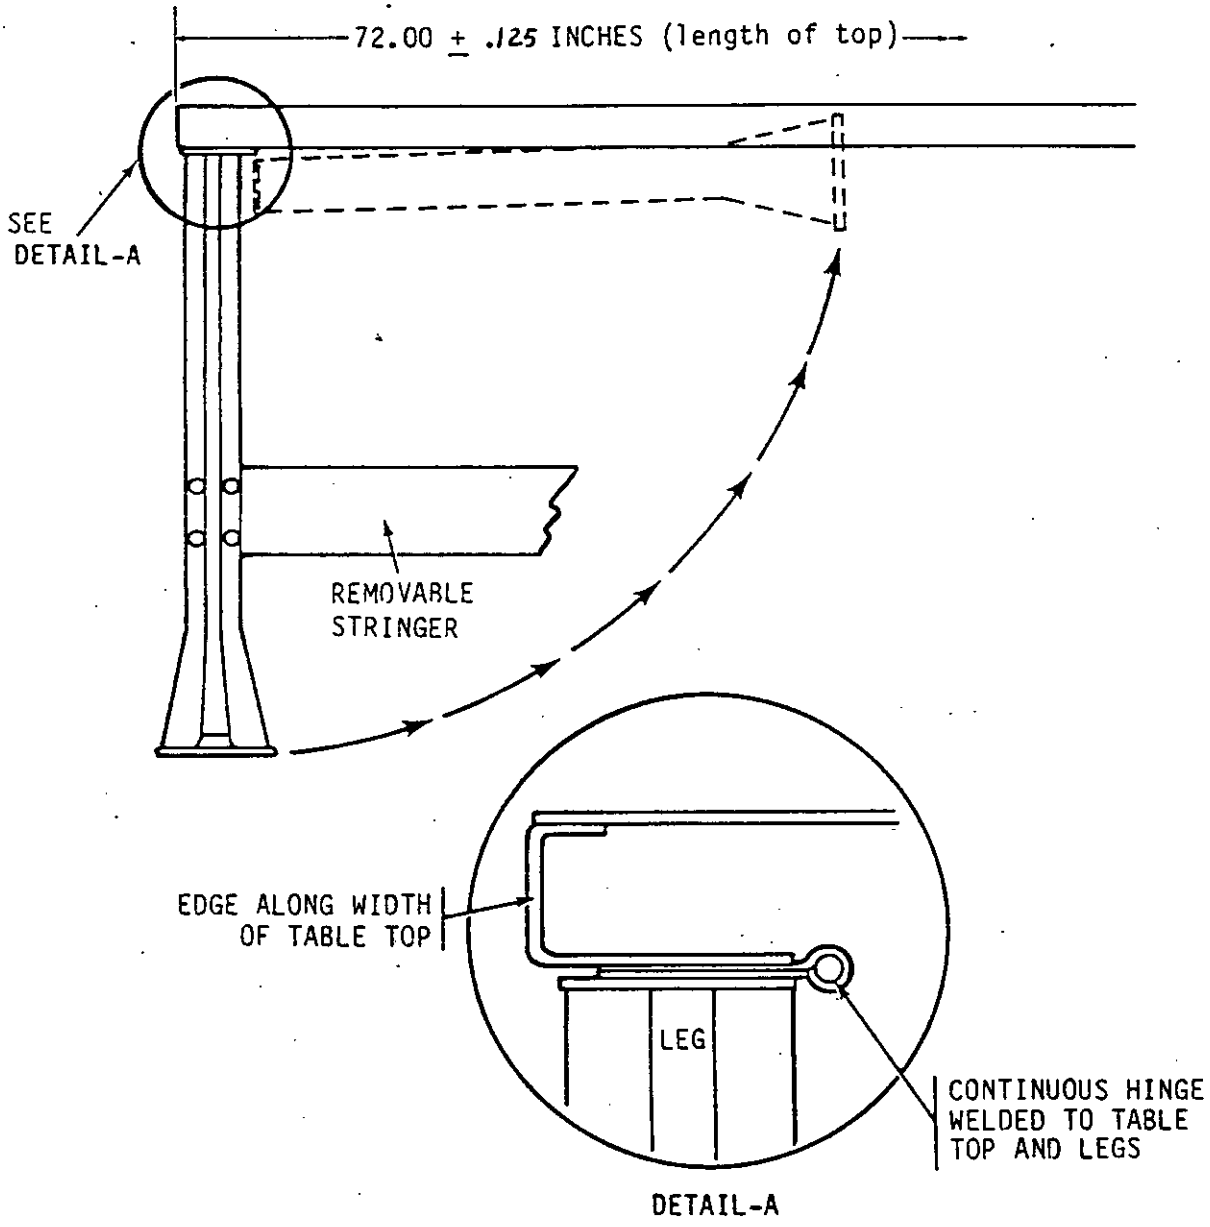


Figure 2. Partial side view of assembled table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-T-45549D	2. DOCUMENT DATE (YYMMDD) 9-22-93

DOCUMENT TITLE

NATURE OF CHANGE (*Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.*)

REASON FOR RECOMMENDATION

SUBMITTER		
NAME (*Last, First, Middle Initial*)	b. ORGANIZATION	
ADDRESS (*Include Zip Code*)	d. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON (*If applicable*)	7. DATE SUBMITTED (YYMMDD)

PREPARING ACTIVITY	
NAME	b. TELEPHONE (*Include Area Code*) (1) Commercial (2) AUTOVON/DSN
ADDRESS (*Include Zip Code*)	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22103:222
Check the source to verify that this is the current version before use.