MILITARY SPECIFICATION

TRAINERS, TANK TURRET: GUNNERY, M26, M26 (M48A2) AND M3OAl (M60Al); PROCESSING FOR STORAGE AND SHIPMENT OF

1. SCOPE

1.1 Scope. This specification covers processing of the M26 (M48A2) and M30Al (M6OA1)Gunnery, Tank Turret Trainers for storage outside of buildings, for immediate use domestic shipment, and for oversea shipment, including car-loading; meeting the requirements of levels A, B, and C processing (see 1.2).

1.2 Classification. Processing shall be of the following levels as specified see 6.1):

Level A and B - Processing for oversea shipment and any storage outside of buildings in excess of 90 days from date of processing (periodic care and preservation during storage required).

Level C - Limited processing for immediate use domestic shipment (excluding open deck loading) and any storage not to exceed 90 days from date of processing.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

O-E-760	Ethyl Alcohol (Ethanol); Denatured Alcohol; and Proprietary Solvent.
QQ-S-781	Steel Strapping, Flat. "
TT-E-529	Enamel, Alkyd, Semi-Gloss.
UU-P-268	Paper, Kraft, Untreated, Wrapping.
UU-P-271	Paper, Wrapping, Waterproofed Waft.
UU-P-313	Paper, Lens Tissue.
UU-T-106	Tape, Pressure-Sensitive Adhesive, Masking, Paper.
UU-T-111	Tape; Paper, Gummed (Sealing and Securing).
VV-L-800	Lubricating Oil, General Purpose, Preservative, (Water-Displacing, Low-Temperature).
ZZ-T-416	Tire Rebuilding and Tire and Tube Repair Materials.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T03:23Z
Check the source to verify that this is the currentversion before use.

PPP-B-636	Box, Fiberboard.
PPP-C-843	Cushioning Material, Cellulosic.
PPP-F-00320	Fiberboard: Sheet Stock (Container Grade) and cut shapes.
PPP-T-60	tApe; pressure Sensitive Adhesive, Waterproof - for Packaging and Sealing.

Military

JAN-P-100	Packaging and Packing for Overseas Shipment.
MIL-P-115	Preservation, Methods of.
MIL-B-117	Bags and Sleeves, Interior Packaging.
MIL-B-121	Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-B-131	Barrier Material, Water Vaporproof, Flexible, Heat-Sealable.
MIL-P-3420	Packaging Materials, Volatile Corrosion Inhibitor Treated, Opaque.
MIL-H-6083	Hydraulic Fluid, Petroleum Base, Preservative.
MIL-I-8574	Inhibitors, Corrosion, Volatile, Utilization of.
MIL-G-10924	Grease, Automotive and Artillery.
MIL-P-12841	On Vehicle Equipment (OVE) for Military Vehicles, packaging of.
MIL-P-12903	Packaging of Periscope, M19.
MIL-P-13988	Paper, Lens, Tissue, Antitarnish, Wrapping.
MIL-P-14232	Parts, Equipment and Tools for Ordnance Materiel, Packaging of.
MIL-C-16173	Corrosion Preventive Compound, Solvent Cutback, Cold Application.
MIL-D-16791	Detergents, Nonionic.
MIL-C-20696	Cloth, Coated, Nylon, Waterproof.

STANDARDS

Military

MIL-STD-129	Marking for Shipment and Storage.
MIL-STD-647	Packaging Standards, Preparation and Use of.

PUBLICATIONS

Packaging Data Sheets

MIL-P-14232/P8229017	- Packaging of Sight, Infinity, M44 and M44C.
MIL-F-14619/P-13131	- Periscope M27, Packaging of.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASSOCIATION OF AMERICAN RAILROADS PUBLICATION

Section No. 1 - General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6 - Rules Governing the Loading of Defense Material on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago 5, Illinois.)

3. REQUIREMENTS

3.1 Levels A and B.

3.1.1 First production trainer. Unless otherwise specified (see 6.2), the first production processed trainer shall be subjected to the inspection specified in 4.5.1 and 4.5.2. Approval of the first production processed trainer shall not relieve the contractor of his obligation to process all production trainers in conformance with this specification. Except as otherwise specified by the procuring activity (see 6.1), any changes to materials or design after approval of the first production processed trainer shall require submission of an additional processed trainer to the tests specified in 4.2.

3.1.2 One of first 10 production processed trainers. After approval of the first production processed trainer (see 3.1.1), one of the first 10 production trainers processed shall be selected by the Government representative for examination and tests specified in 4.2.

3.1.3 Materials.

3.1.3.1 Volatile corrosion inhibitor (VCI). When volatile corrosion inhibitor (VCI) type carrier material is specified, it shall conform to type I of Specification MIL-P-3420 and shall be used in accordance with Specification MIL-I-8574.

3.1.4 Preparation prior to processing. Except as otherwise specified herein, and to the maximum extent consistent with production efficiency, economy and safe storage and shipment, trainer shall be prepared for storage and shipment in a completely assembled condition after test runs and completion and approval of all necessary repairs. Specified equipment shall be installed and all adjustments made so that the vehicle may be operated, shipped, and placed into service with a minimum of delay.

3.1.4.1 Disassembly. Observer platforms or catwalks, stowage boxes, cannon tube, and any other detachable equipment susceptible to damage in shipment or storage, shall be removed from trainer.

3.1.4.2 Processing records. Records of trainer processing shall be maintained and be readily available for review by the Government inspector.

3.1.5 Cleaning and drying.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

3.1.5.1 Interior of trainer. Trainer interior surfaces shall be cleaned in accordance with process C-1 of Specification MIL-P-116, except that no liquids under pressure shall be used, and shall be dried by any applicable procedure specified therein.

3.1.5.1.1 Headrests and crash pads. Installed headrests and crash pads shall be washed with a solution of soap and water, rinsed with clear water and dried (see 3.1.14).

3.1.5.1.2 Fire control instruments. Fire control instruments shall be cleaned in accordance with the applicable specification (see 3.1.11).

3.1.5.2 Exterior of trainer. Trainer exterior surfaces shall be cleaned with a mild detergent in a manner which will assure removal of all foreim matter. including excess cleaning material. Cleaning shall be followed by a complete rinsing with clear water, then thorough drying. Cleaning shall be accomplished without directing steam or water jets at the interior of trainer.

3.1.5.2.1 Cannon. When inspection indicates the need for reprocessing of cannon, cannon shall be cleaned in accordance with process C-3 of Specification MIL-P-116 and thoroughly dried in accodance with procedure D-4 as specified therein.

3.1.6 Relubrication. When trainer has been operated in excess of 30 days since previous lubrication, or after a liquid and detergent cleaning, trainer shall be lubricated using materials in accordance with drawings, specifications, or lubrication order pertinent to the trainer. All exposed oil-can points such as hinges, latches, control-rod clevises, pins and control levers shall be lubricated with lubricating oil conforming to S-pacification W-L-800. Excess lubricating material shall be removed after lubrication.

3.1.7 Turret ring bearing. Plugs shall be removed from grease fitting openings in turret ring bearing and grease fittings installed. Grease conforming to Specification MIL-G-10924 shall be pumped through the grease fittings until grease is visible between the two sections around the circumference of the ring. The turret shall be rotated five times in both directions and again lubricated until all surfaces on the circumference of the ring are lubricated. Grease fittings shall be removed and plugs reinstalled. Excess grease shall be removed from the exterior surface of the race. DD Form 1397 shall be marked with the information, “TURRET REARING COMPLETELY FILLED WITH GREASE - SPECIFICATION MIL-G-10924”.

3.1.8 Cannon and mount.

3.1.8.1 Cannon tube. Cannon tube shall be removed and cleaned. After cleaning (see 3.1.5.2.1), bore and chamber of the cannon shall be coated with preservative oil conforming to Specification W-L-800. Excess preservative shall be allowed to drain from coated surfaces. A strip of VCI-treated carrier material conforming to class 3 of Specification MIL-P-3420) (see 3.1.3.1) shall be cut and rolled into a tube with the VCI-treated surface on the outside. The carrier material shall be of a size that will provide a continuous cover for the bore and chamber surfaces. The rolled carrier material tube shall be inserted into the cannon, extending the entire length of bore and chamber. Tube shall not be forced or kinked In a manner that would obstruct the chamber. Preservative conforming to grade 4 of Specification MIL-C-16173 shall be applied to all exterior, unpainted surfaces of cannon tube. AU cannon tube openings shall be sealed and exterior, preserved surfaces covered

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

with barrier material conforming to Specification MIL-B-131 and tape conforming to type I, class 1 of Specification PPP-T-60. Cannon ends shall be overwrapped with barrier material conforming to type I, grade C, of Specification MIL-B-121 and sealed with tape conforming to type I, class 1 of Specification PPP-T-60 (see figures 5, 25, and 31). The muzzle brake shall remain installed on the M26 cannon tube. The bore evacuator shall remain installed on the M30A1 cannon tube.

3.1.8.2 Cannon mount. After cannon tube is removed, grease conforming to Specification MIL-G-10924 shall be applied to all unpainted surfaces, including phosphate surfaces, of all components of the cannon mount. The preserved cannon mount shall be overwrapped with barrier material conforming to type II, grade A, class 2 of Specification MIL-B-121. Barrier material shall be secured in place with tape conforming to class 2 of Specification UU-T-111. Cannon mount shall be blocked in position by placing a nominal 4- by 4- by 8-inch wood block between the top of the mantlet and the turret (see figure 30).

3.1.8.3 Exercising of recoil mechanism. Prior to processing as specified in 3.1.8.4.1 and when the recoil mechanism has not been exercised, proof-fired, overhauled, or manufactured within 4 months prior to preparation for storage or shipment, the recoil mechanism shall be exercised a minimum of three extensions of the recoil piston. Extension shall be not less than 6 inches. Record of exercising shall be entered on DA Foam 2408-4 "Weapon Record Data" and proof testing of the weapon shall be entered on DA Form 2408-9 "Proof Acceptance Record".

3.1.8.4 Exercising of replenisher. Replenisher assemblies shall be exercised coincidently with the recoil mechanism (see 3.1.8.3).

3.1.8.4.1 Processing of replenisher after exercising. Replenisher shall be filled to bleed position with hydraulic fluid conforming to type 1 of Specification MIL-H-6083, then drained to operating level.

3.1.8.5 Commander's cupola. Periscope guard on top of cupola shall be removed, identified and stowed in interior of turret. Bolts and washers shall be reinstalled.

3.1.9 Miscellaneous preservation. Except as otherwise specified, all exposed, unpainted, unplated surfaces including machined-metal surfaces on the interior and exterior of the trainer, shall be coated with preservative conforming to grade 4 of Specification MIL-C-16173.

3.1.10 Hatches. Rubber seals around hatches shall be coated with powdered talc conforming to type IV, class C of Specification ZZ-T-416. During shipment, hatches shall be closed and locked from the inside. During storage, hatches shall be blocked open as much as possible, without interfering with the cover, to allow maximum ventilation under trainer cover.

3.1.11 Fire control items.

3.1.11.1 M105C telescope, M28C periscope, and M31 periscope The M105C telescope, M28C periscope and M31 periscope shall not removed from their installed position in the trainer for shipment or storage. Exposed optical components shall be cleaned by blowing on exposed optical glass surfaces with air from a hand syringe, or by use of a clean camel's hair brush, followed by the use of ethyl alcohol conforming to Specification O-E-760. In cases of contamination not removable by alcohol, cleaning shall be accomplished by use of a solution consisting of 2 ounces detergent

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

conforming to Specification MIL-D-16791, 1/2 gallon alcohol conforming to Specification O-E-760, and 1 gallon of distilled water. Using a swab made of lens tissue conforming to type I or II of Specification UU-P-313, optical glass surfaces shall be washed with the cleaning agent. Washing shall be repeated using a clean swab each time until no dirt or other foreign matter remains on the surface. Cleaning shall be accomplished with a minimum of pressure and rubbing, without the use of cloth or ribber materials, to prevent damage to lens coatings. Immediately after cleaning, the optics shall be covered or wrapped with lens tissue conforming to Specification MIL-P-13989 secured with tape conforming to Specification UU-T-106. All exposed, unpainted metal surfaces shall be coated with grease conforming to Specification MIL-G-10924.

3.1.11.1.1 M24 and M27 periscopes. If installed the M24 and M27 periscopes shall be removed from the trainer, packaged and packed in accordance with the level A requirements of the applicable specification as follows, then stowed with the OVE:

Periscope M24 - Specification MIL-P-12903,
Periscope M27 - Packaging Data Sheet MIL-F-14619/P-13131.

3.1.11.2 Instrument lights (dry-cell powered). If installed, instrument lights shall be removed from the trainer and packaged and packed in accordance with the level A requirements of Specification MIL-P-14232. Packed lights shall be identified and stowed with OVE. Batteries, if installed, shall be removed, packaged, packed, identified, and stowed with the OVE.

3.1.11.3 Range finders. The optical surfaces, including end box windows, shall be cleaned as prescribed in 3.1.5.1.2 then covered with four thicknesses of lens tissue conforming to Specification MIL-P-13988. The tissue shall be secured with tape conforming to Specification W-T-106. All exposed, unpainted, metal surfaces shall be coated with grease conforming to Specification MIL-G-10924.

3.1.11.3.1 Purging of range finders. Range finders on hand for over 90 days from date of receipt at trainer manufacturer, not prtected as specified in 3.1.11.3 or which disclose internal moisture at time of preparation for shipment or storage, shall be processed as follows: All. controls shall be exercised to full limits in all. normal directions of movement and returned to normal position. Caps shall be removed from right- and left-hand valves of range finder. Valve core shall be removed from one valve of the range finder. The other valve shall be connected to a cylinder of dry nitrogen and the nitrogen allowed to flow at 5 psi through the range finder for 20 to 30 minutes. Pressure shall be reduced to 1 to 2 psi and the valve core installed. Caution: a check shall be made to make certain that cylinder pressure does not exceed capacity of the pressure regulator. The nitrogen cylinder shall be disconnected and the caps shall be replaced on the right- and left-hand valves. After purging, the range finder shall be processed in accordance with 3.1.11.3. End boxes shall be purged only when internal moisture is found during inspection.

3.1.11.4 Mounts, ballistic computer and drive. All exposed, unpainted, metal surfaces of periscope and telescope also computer and drive, shall be coated with grease conforming to Specification MIL-G-10924.

3.1.11.5 Infinity sight, M44C. If installed, infinity sight shall be removed from the trainer. The sight shall then be packaged in accordance with level A requirements of Specification MIL-P-14232 and Packaging Data Sheet MIL-P-14232/P8229017, then identified and stowed with OVE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

3.1.11.6 Level vial covers. All level vial covers shall be positioned over the vials.

3.1.11.7 Exposed optical glass. Any exposed optical glass, not otherwise provided for herein, shall be cleaned, wrapped, and taped as specified in Specification MIL-P-12903.

3.1.12 On-Vehicle-Equipment (OVE). Except as otherwise specified (see 6.1), all spare parts, tools and equipment shall be packaged in accordance with Standard MIL-STD-647, Specification MIL-F-14232, or applicable packaging data sheet. The packaged items shall be packed and marked in accordance with Specification MIL-P-12841. For shipping purposes, OVE containers shall be blocked, braced, and anchored to prevent movement. OVE containers shall be placed in a position which will not increase the overall cube. Each container shall be secured in each direction with two 1 l/4-inch straps conforming to type I, class B of Specification QQ-S-781, or by placing it between two or more secured containers, or any other equally effective holding device. Corner plates shall be used under strapping. Pack shall be identified to pertinent trainer by serial number and, except during shipment, shall be stored inside buildings.

3.1.13 Record forms. A copy of "The Equipment Log Book" consisting of Binder (FSN 7510-889-3494) with required forms, and two copies of "Processing and Reprocessing Record for Shipment, Storage, and Issue of Vehicles and Spare Engines", DD Form 1397 (see 6.3), shall be furnished and completed with each trainer. Instructions for preparation and attachment or location of "The Equipment Log Book" shall be supplied by the Government representative. One copy of DD Form 1397 shall be placed in an envelope conforming to type I, class e of Specification MIL-B-117. Envelope shall be closed by stapling, identified, and secured to trainer. The duplicate copy shall be placed in the envelope with the log book.

3.1.14 Headrests and crash pads Immediately after drying, cushioned portions of headrests and crash pads shall be covered with paper conforming to grade B of Specification UU-P-268 and having a minimum basis weight of 60 pounds. Paper shall be secured with tape conforming to type I of Specification UU-T-106.

3.1.15 Fire extinguisher. Carbon dioxide (CO_2) fire extinguisher cylinder shall have a minimum of 90 percent of rated full charge. All seals shall be intact and record form WD Form 253 shall be completed and securely attached to each cylinder (see 6.2).

3.1.16 Power rectifier. Rectifier and all external connectors shall be covered with barrier material. conforming to class 1 of Specification MIL-B-131. Barrier material shall be sealed with tape conforming to type I, class 1 of Specification PPP-T-60. Preservative conforming to grade 4 of Specification MIL-C-16173 shall be applied to unpainted, nonelectrical exterior surfaces of the rectifier and surfaces of wheels and handle. The preserved areas shall be wrapped with barrier material conforming to type II, grade A, class 2 of Specification MIL-B-121. Power rectifier shall then be placed in a nailed wood box conforming to class 2, style 2 of Specification PPP-B-621, and cushioned and blocked in accordance with the applicable requirements of Specification JAN-P-100. Two nominal 2- by 4-inch skids shall be added to nailed, wood box. The box shall be covered with barrier material conforming to class E-2 of Specification UU-P-271. Barrier material shall extend 12 inches below top of the box. Box shall be marked in accordance with Standard MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

3.1.17 Power receptacle. Power receptacle shall be sealed with tape conforming to type I, class of Specification PPP-T-60.

3.1.18 Canvas. Canvas items, including muzzle brake cover, shall be removed, thoroughly, and placed in a carton conforming to Specification PPP-B-636. After packaging, carton shall be marked in accordance with Standard MIL-STD-129 and placed within turret and secured.

3.1.19 Metal stowage box. The metal stowage box provided for the M30A1. trainer shall be packed in a container constructed in accordance with figure 18. The packed container shall be placed on the skid in accordance with figure 11, and secured in that position.

3.1.20 Cartridge racks. Cartridge racks shall be loaded with empty cartridge shells.

3.1.2.1 Trainer skid. Trainers shall be installed on skids constricted in accordance with figures 1 through 4. Observer platforms, stowage boxes, cannon tube, boxed rectifier, and OVE shall be installed and secured on the skid in accordance with figures 5 through 35 and table 1, as applicable. Table I shows the figure numbers that apply to the designated level of processing for M26 and M30A1 trainers.

Table I. Installation of M26 and M30Al trainers - levels of processing

Figure numbers	M26		M30A1	
	Levels A and B	Level C	Levels A and B	Level C
1, 2, 3, 4, 6, 7, 14, 15, 19, 30	X		X	
36, 37		X		X
8, 9, 12, 16, 17, 18, 20, 21, 23, 27	X	X	X	X
25, 34, 35	X			
5, 10, 11, 13, 22, 24, 26, 28, 29 31, 32, 33			X	

3.1.22 Trainer turret openings. The turret openings shall be closed with 1/8-inch masonite. Masonite shall secured in place with brackets conforming to figure 17. The openings around bottom of trainer stand shall also be close with 1/8-inch masonite conforming to figures 8 and 9. The trainer basket protective screening shall be covered with fiberboard conforming to type CF, class weather-resistant, variety SW, grade W5c *of* Specification PPP-F-00320. The above masonite and fiberboard closures shall be sealed with 4-inch wide tape conforming to type II, class 1 of Specification PPP-T-60.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

3,1.23 Trainer cover. Trainer cover shall be fabricated from nylon-coated cloth conforming to type II, class 3 of Specification MIL-C-20696, except that the overall weight shall be 14 ounces per square yard. Cover shall be of a size that it can be positioned to conform to the contour of the turret and completely cover the trainer. Cover shall extend over the edge of the trainer sufficiently to allow maximum closure and securement. All sharp corners of trainer shall be cushioned with a 3/4-inch minimum thickness of cushioning material. conforming to Specification PPP-C-843, secured in place with tape conforming to type III, class 1 of Specification PPP-T-60. Trainer cover zipper fasteners shall be closed and secured. Cover shall be provided with openings in the area of turret lifting eyes. After cover is installed, the openings around the lifting eyes shall be sealed with tape conforming to type III, class 1 of Specification PPP-T-60. The lifting eyes shall not be used for lifting trainer when trainer is secured to the skid. The information "DO NOT LIFT" shall be stenciled on the cover at each lifting eye. Stenciling shall be in characters a minimum of 2 inches high, using white enamel conforming to Specification TT-E-529.

3.1.24 Marking. In addition to any special marking specified herein or in the contract or order, the trainer shall be marked in accordance with Standard MIL-STD-129.

3.1.24.1 Skid lifting points. The information "Lift Here" shall be stenciled at each skid lifting eye using white enamel conforming to Specification TT-E-529. Stenciling shall be in characters a minimum of 2 inches high. In lifting, spreaders shall be used to avoid damage to cover.

3.1.24.2 Humping precaution. The information "DO NOT HUMP" shall be stenciled in a conspicuous location on each side of the open top car.

3.1.25 Loading. Skidded trainer shall be blocked, braced, and anchored on open top railroad cars in accordance with "Sections 1 and 6 - Rules Governing the Loading of Commodities on Open Top Cars" of the Association of American Railroads publication (see 2.2).

3.2 Level C. Trainers shall be processed the same as for levels A and B, except that paragraphs 3.1.4.1, 3.1.8.1, 3.1.8.2, 3.1.21, 3.1.23 and 3.1.25 shall not apply. In lieu of the excepted paragraphs, 3.2.1 through 3.2.4 shall apply.

3.2.1 Disassembly. Observer platforms or catwalks, stowage boxes, and any other detachable equipment susceptible to damage in shipment or storage shall be removed from trainer. Cannon tube, muzzle brake and evacuator shall not be removed.

3.2.2 Cannon and mount.

5.2.2.1 Cannon tube. After cleaning (see 3.1.5.2.1), bore and chamber of the cannon shall be coated with preservative oil conforming to Specification W-L-800. Excess preservative shall be allowed to drain from coated surfaces. A strip *of* VCI-treated barrier material conforming to grade C of Specification MIL-P-3420 (see 3.1.3.1) shall be cut and rolled into a tube with the VCI-treated surface on the outside. The barrier material shall be of a size that will provide a continuous cover for the bore and chamber surfaces. The rolled barrier material tube shall be inserted into the cannon, extending the entire length of bore and chamber. Tube shall not be forced or kinked in a manner that would obstruct the chamber. Cannon tube, muzzle brake, and bore evacuator openings shall be covered with barrier material conforming to class 1 of Specification MIL-B-131. Barrier material. shall be sealed with tape conforming to type 1, class 1 of Specification PFP-T-60.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

3.2.2.1.1 Breech mechanism. All unpainted surfaces, including phosphated surfaces of the breech block, breech operating mechanism, and firing mechanism, shall be coated with grease confoming to Specification MIL-G-10924. Breech shall be covered with barrier material conforming to class 1 of Specification ML-B-131. Barrier material shall be sealed with tape conforming to type 1, class 1 of Specification PPP-T-60.

3.2.3 Trainer cover. Trainer cover shall be provided in accordance with 3.1.23, except that in lieu of the note on the cover at each lifting eye, the information "LIFT HERE" shall be stenciled. Cover shall be provided with an opening for the cannon tube. After cover is installed, the openings around the tube shall be sealed with tape conforming to type III, class 1 of Specification PPP-T-60.

3.2.4 Loading. Trainer, observer platforms, stowage boxes, boxed rectifier and OVE shall be loaded on open top railroad cars. Loading, blocking, bolting, bracing and anchoring shall be in accordance with "Sections 1 and 6 of Rules Governing the Loading of Commodities on Open Top Cars" of the Association of American Railroads publication (see 2.2), and as specified herein. A support frame *as* shown in figures 36 and 37 shall be constructed on the railroad car for anchoring. *cannon* tube and boxed rectifier in position. Six 1 1/4-inch holes shall be drilled in the trainer bottom plate. Drilled holes shall be evenly spaced and equidistant from the center and approximately 60 degrees apart. Trainer shall be secured to railroad car floor with six 1 1/8-7 bolts. Four locator brackets, constructed In accordance with figure 16, shall be positioned and secured as shown on figure 6 to prevent movement in transit. Trainer shall then be tied down to the railroad car with 5/8-inch wire rope and 5/8-inch turnbuckles using cushioning as shown in figure 7, except that cables shall be attached between turret lifting eyes and car stake pockets. Observer platforms and boxed rectifiers shall be secured to railroad car with l/4-inch wire rope and 3/8-inch turnbuckles, with 1 1/2-inch steel strapping, and with wood blocking as shown in figures 36 and 37.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise spectified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth In the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First production and one of first 10 production process trainers. The first production processed tminer (see 3.1.1), and one of the first 10 production processed trainers (see 3.1.2) shall be subjected to the inspection and tests specified in 4.5.1 through 4.5.2.2.

4.3 Production processed trainers. Unless otherwise specified (see 6.1), all production processed trainers shall be subjected to the tests specified in 4.5.2 through 4.5.2.2.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:23Z
Check the source to verify that this is the current version before use.

4.4 Rejection. Failure of the first production, one of the first 10, or any production processed trainer to conform to any requirements of this specification shall be cause for rejection of the trainer, and refusal to continue acceptance of trainers by the Government until objective evidence has been provided by the contractor that corrective action has been taken to eliminate the condition/s which caused rejection.

4.5 Inspection procedures.

4.5.1 Materials. Except for materials which have been Government inspected at the source, all materials to be used in processing of trainer shall be inspected in accordance with the material specification; or certified inspection and laboratory test reports shall be furnished which show that materials, as furnished, conform to the detailed specification.

4.5.2 Processing. Trainer processing shall be inspected to determine conformance to this specification. Inspection of processing shall. include all items specified in table II, and 4.5.1 through 4.5.2.2.

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:23Z
Check the source to verify that this is the current version before use.

Table II. Processing inspection
(See Indicated paragraphs for levels A, B, and C requirements)

	Cleaning	Preservation		Packaging
	Levels A, B and C	Levels A and B	Level C	Levels A, B and C
Preparation prior to processing				3.1.4
Disassembly				3.1.4.1 1/
Processing records				3.1.4.2
Interior of trainer	3.1.5.1			
Headrests and crash pads	3.1.5.1.1	3.1.14	3.1.14	
Fire control instruments	3.1.5.1.2			
Exterior of trainer	3.1.5.2			
Cannon	3.1.5.2.1			
Relubrication		3.1.6		
Turret ring bearing		3.1.7		
Cannon tube		3.1.8.1	3.2.2	
Cannon mount		3.1.8.2	3.2.2	
Exercising of recoil mechanism		3.1.8.3	3.1.8.3	
Exercising of replenisher		3.1.8.4	3.1.8.4	
Processing of replenisher after exercising		3.1.8.4.1	3.1.8.4.1	
Commander's cupola				3.1.8.5
Miscellaneous preservation		3.1.9	3.1.9	
Hatches		3.1.10	3.1.10	
M105 telescope, M28C and M31 periscopes	3.1.11.1	3.1.11.1	3.1.11.1	
M24 and M27 periscopes				3.1.11.1.1
Instrument lights				3.1.11.2
Range finders	3.1.11.3	3.1.11.3	3.1.11.3	
Purging of range finders	3.1.11.3.1	3.1.11.3.1	3.1.11.3.1	
Mounts, ballistic computer and drive		3.1.11.4	3.1.11.4	
Infinity sight, M44C				3.1.11.5
Level vial covers				3.1.11.6
Exposed optical glass	3.1.11.7	3.1.11.7	3.1.11.7	
On-vehicle-equipment (OVE)	3.1.12	3.1.12	3.1.12	3.1.12
Record forma				3.1.13
Fire extinguisher				3.1.15
Power rectifier		3.1.16	3.1.16	3.1.16
Power receptacle		3.1.17	3.1.17	
canvas				3.1.18
Metal stowage box				3.1.19
Cartridge racks				3.1.20
Trainer skid				3.1.21
Trainer turret openings		3.1.22	3.1.22	
Trainer cover				3.1.23 2/
Marking				
Skid lifting points				3.1.24.1
Humping precaution				3.1.24.2
Loading				3.1.25 3/

1/ For level C packaging, paragraph 3.2.1 shall apply
2/ For level C packaging, paragraph 3:2:3 shall apply
3/ For level C packaging, paragraph 3.2.4 shall apply

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

4.5.2.1 Cleaning. To determine conformance to 3.1.5.1, interior or trainers shall. be examined cleanliness; one vehicle each day shall be tested for cleanliness in accordance with the applicable provisions of Specification ML-P-116. To determine conformance to 3.1.5.2, exterior of vehicle shall be examined for cleanliness. Surfaces to which tape is to be applied shall be examined for cleanliness before applying tape.

4.5.2.2 Cannon. Cannon shall be examined to determine condition and effectiveness of processing. When reprocessing has been accomplished, it shall be examined for conformance to 3.1.5.2.1 and 3.1.8.

5. PREPARATION FOR DELIVERY

Not applicable to this specification.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable level of processing.
(c) If inspection of the first production processed vehicle is not-required (see 3.1.1).
(d) If miscellaneous preservation is to be other than specified (see 3.1.9).
(e) If OVE is to be packaged other than specified (see 3.1.12).
(f) If production processed vehicles are to be tested other than specified (see 4.3).

6.2 Safety precautions. Caution should be exercised in handling CO_2 fire extinguisher cylinders. Cylinders should not be dropped, permitted to strike each other, or be handled roughly. Extreme care should be exercised during the reinstallation operation to avoid tripping fire extinguisher control system (see 3.1.15).

6.3 Forms. A copy of “The Equipment Log Book” and all required forms will be furnished the contractor by the Government at least 30 days before shipment of the equipment as required by the contract delivery schedule (see 3.1.13).


Custodian:
Amy - MO


Preparing activity:
Army - MO(ATAC)

Project No. 6920-AO11

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

TRAINER	A	B
M26	31 1/4	218 1/2
M30A1	38	232

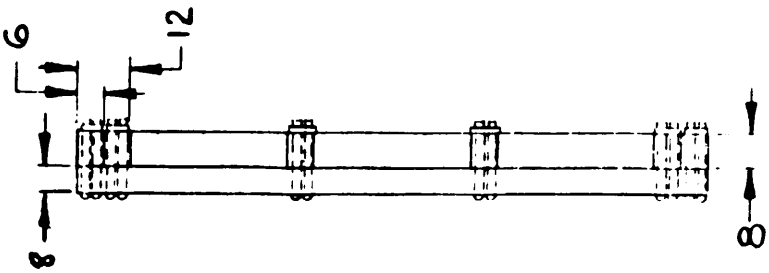

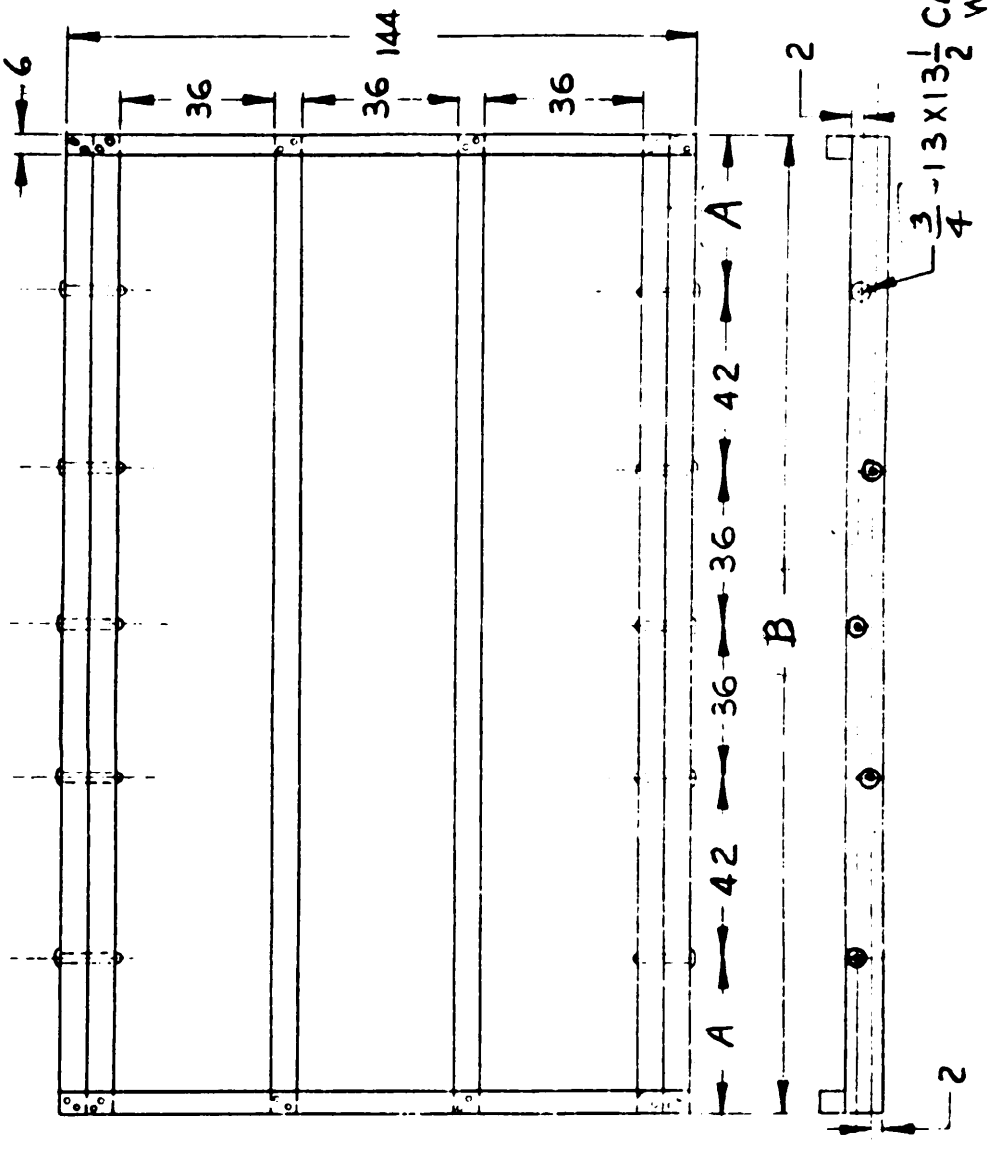


M26-M30A1 TURRET GUNNERY TRAINERS
SHIPPING SKID
FIG 1


MATERIAL:
GROUP 4-OAK-ROUGH CUT

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS SHIPPING SKID
WITH #2 OAK FLOORING - 2 X 12 - NAIL PATTERN SHOWN
FIG 2

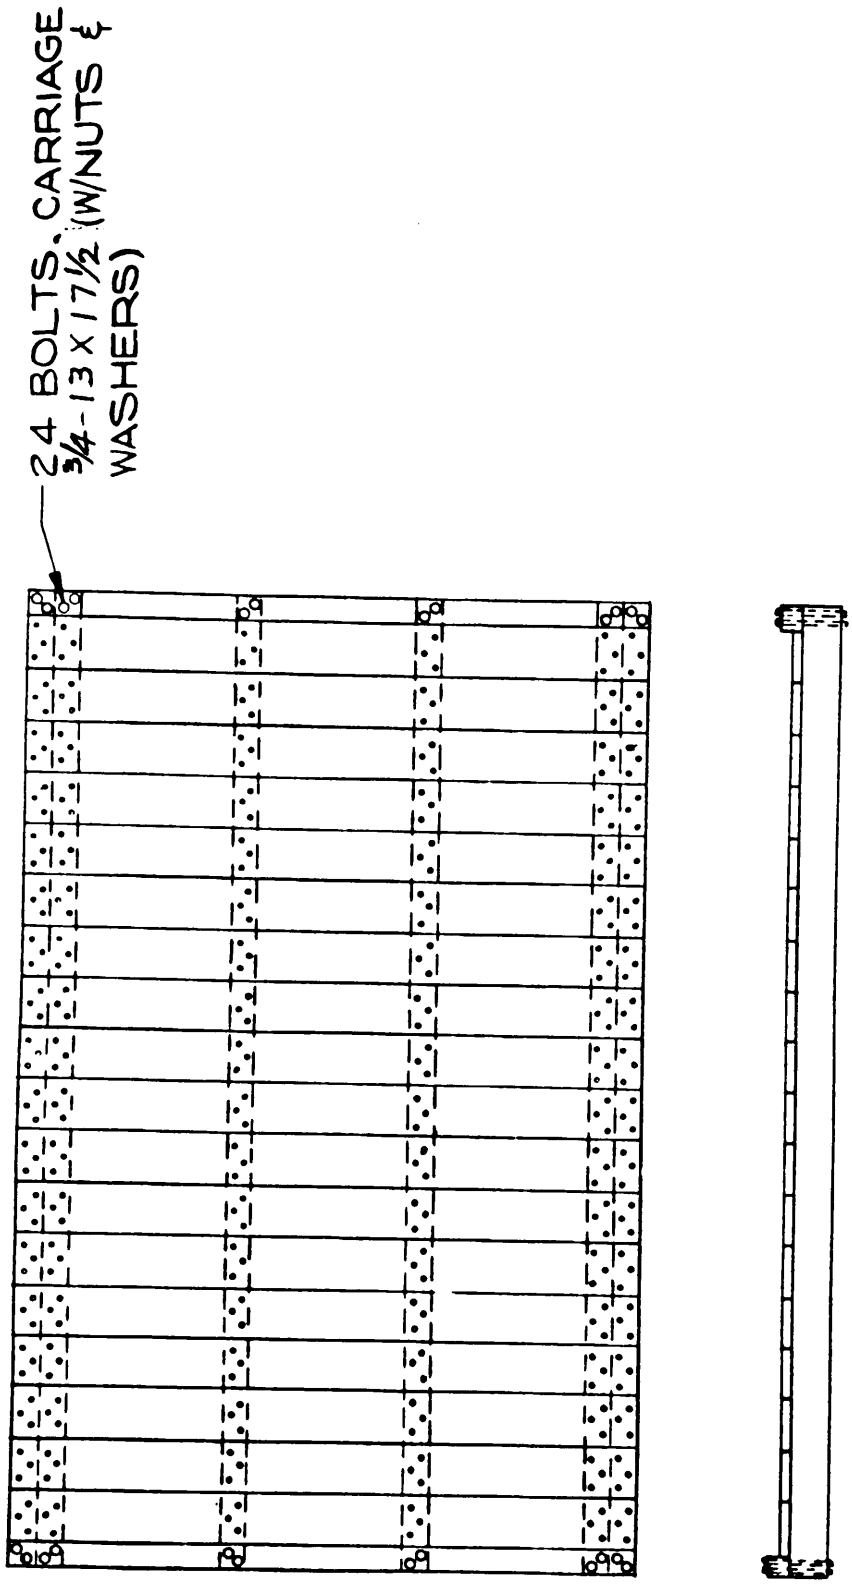


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

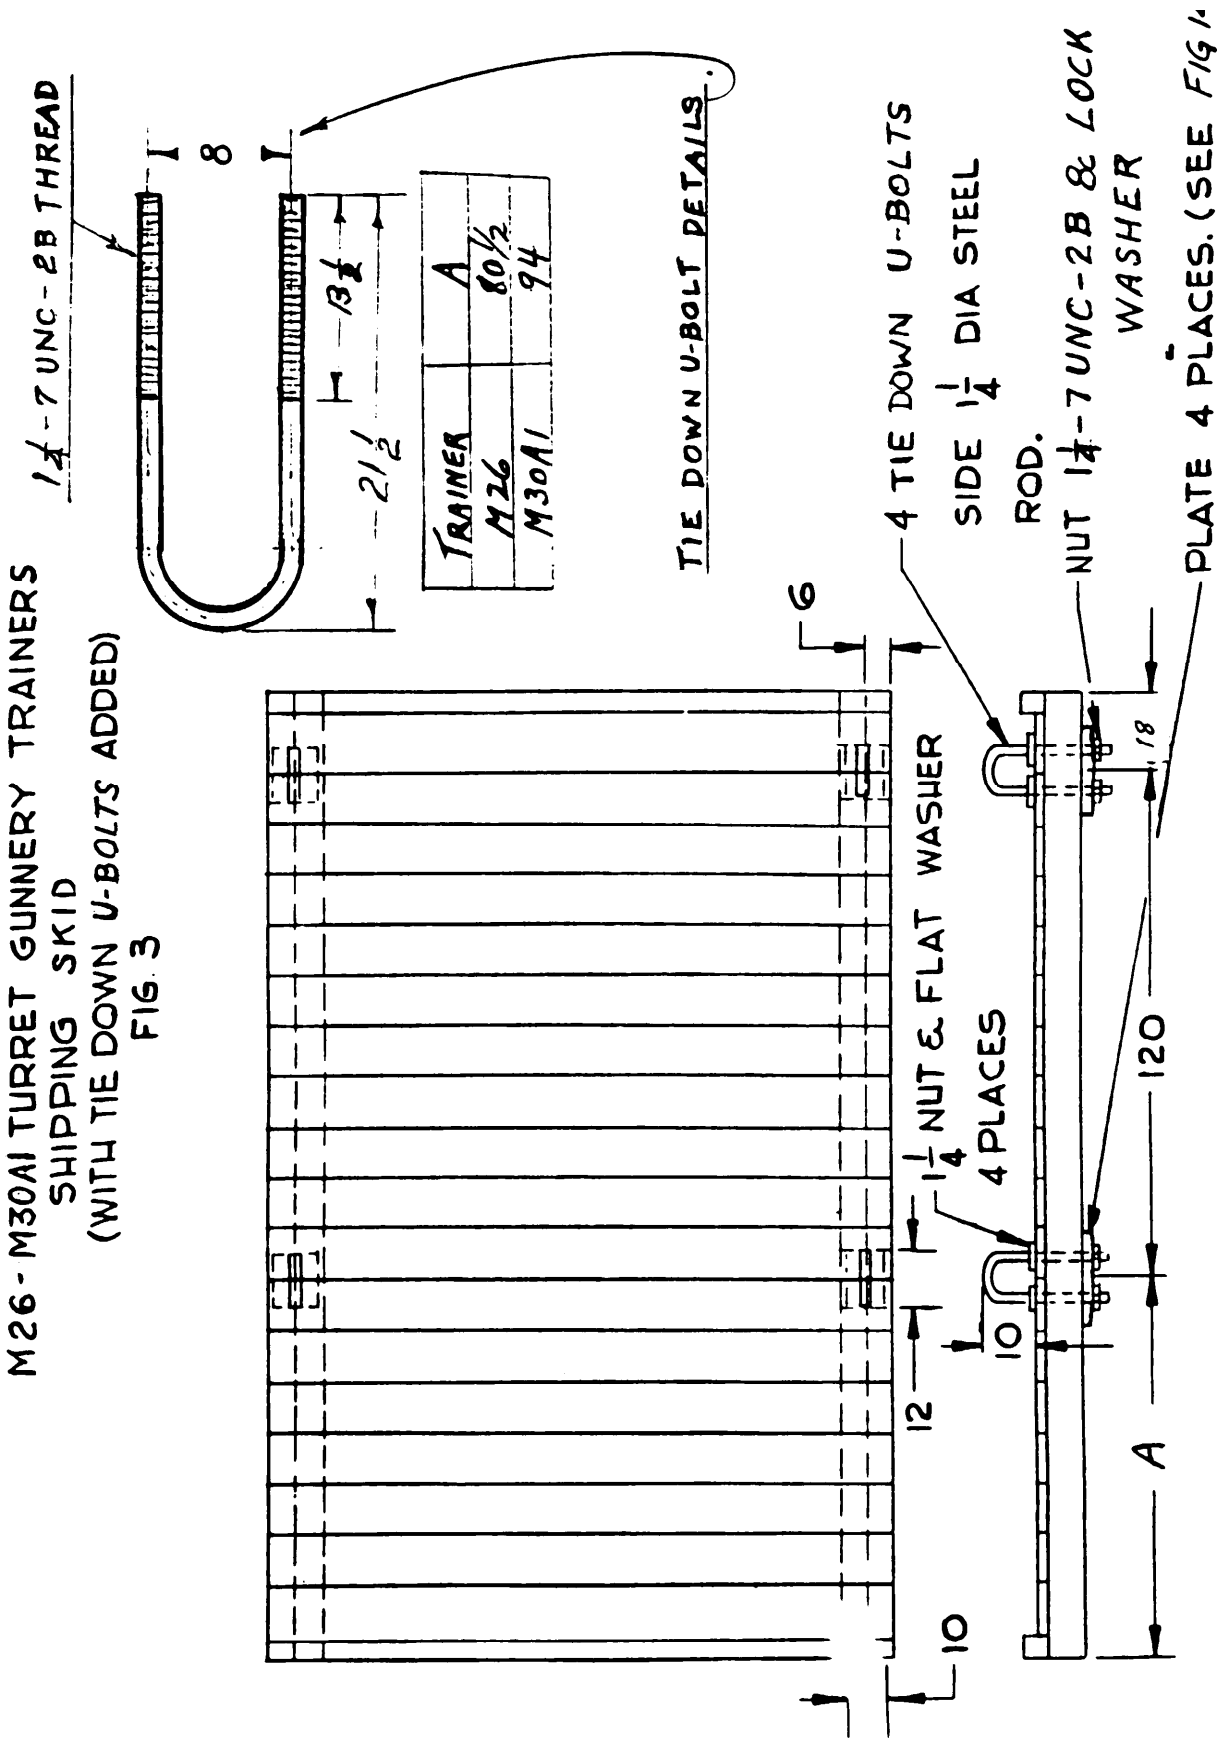


M26-M30A1 TURRET GUNNERY TRAINERS
SHIPPING SKID
(WITH TIE DOWN U-BOLTS ADDED)
FIG. 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS SHIPPING SKID -
TRAINER STAND MOUNT HOLES IN SKID -
W/REINF PLATES - SKID PLATES UNDER SKID
FIG 4

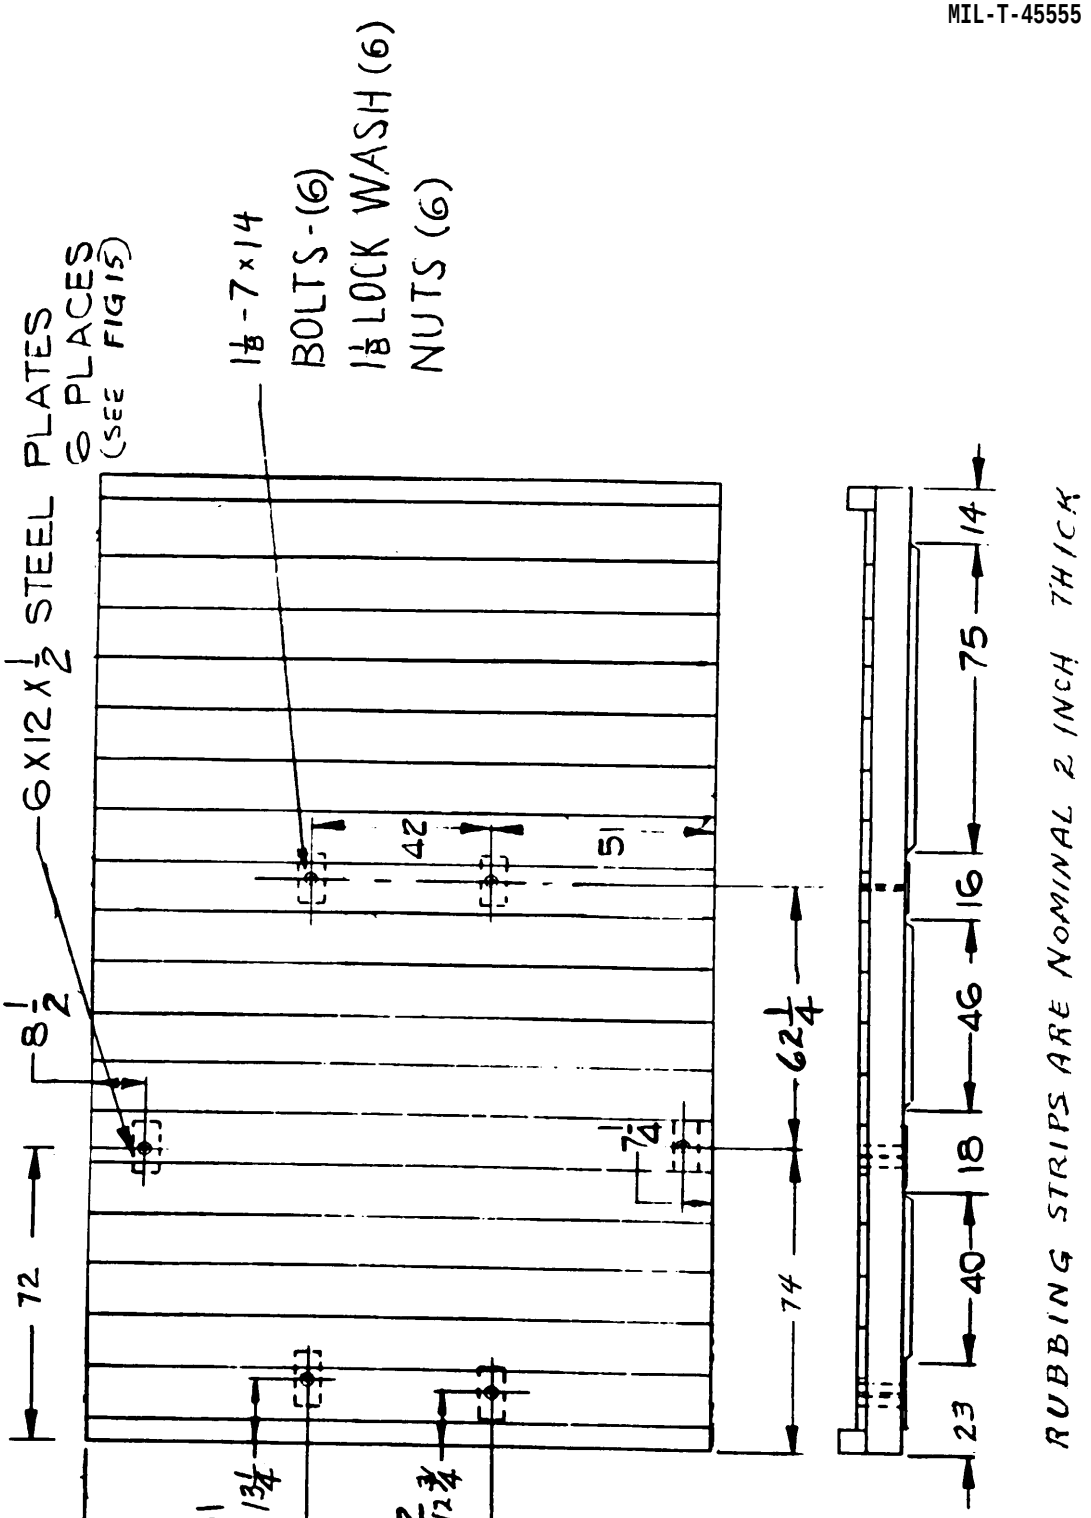

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

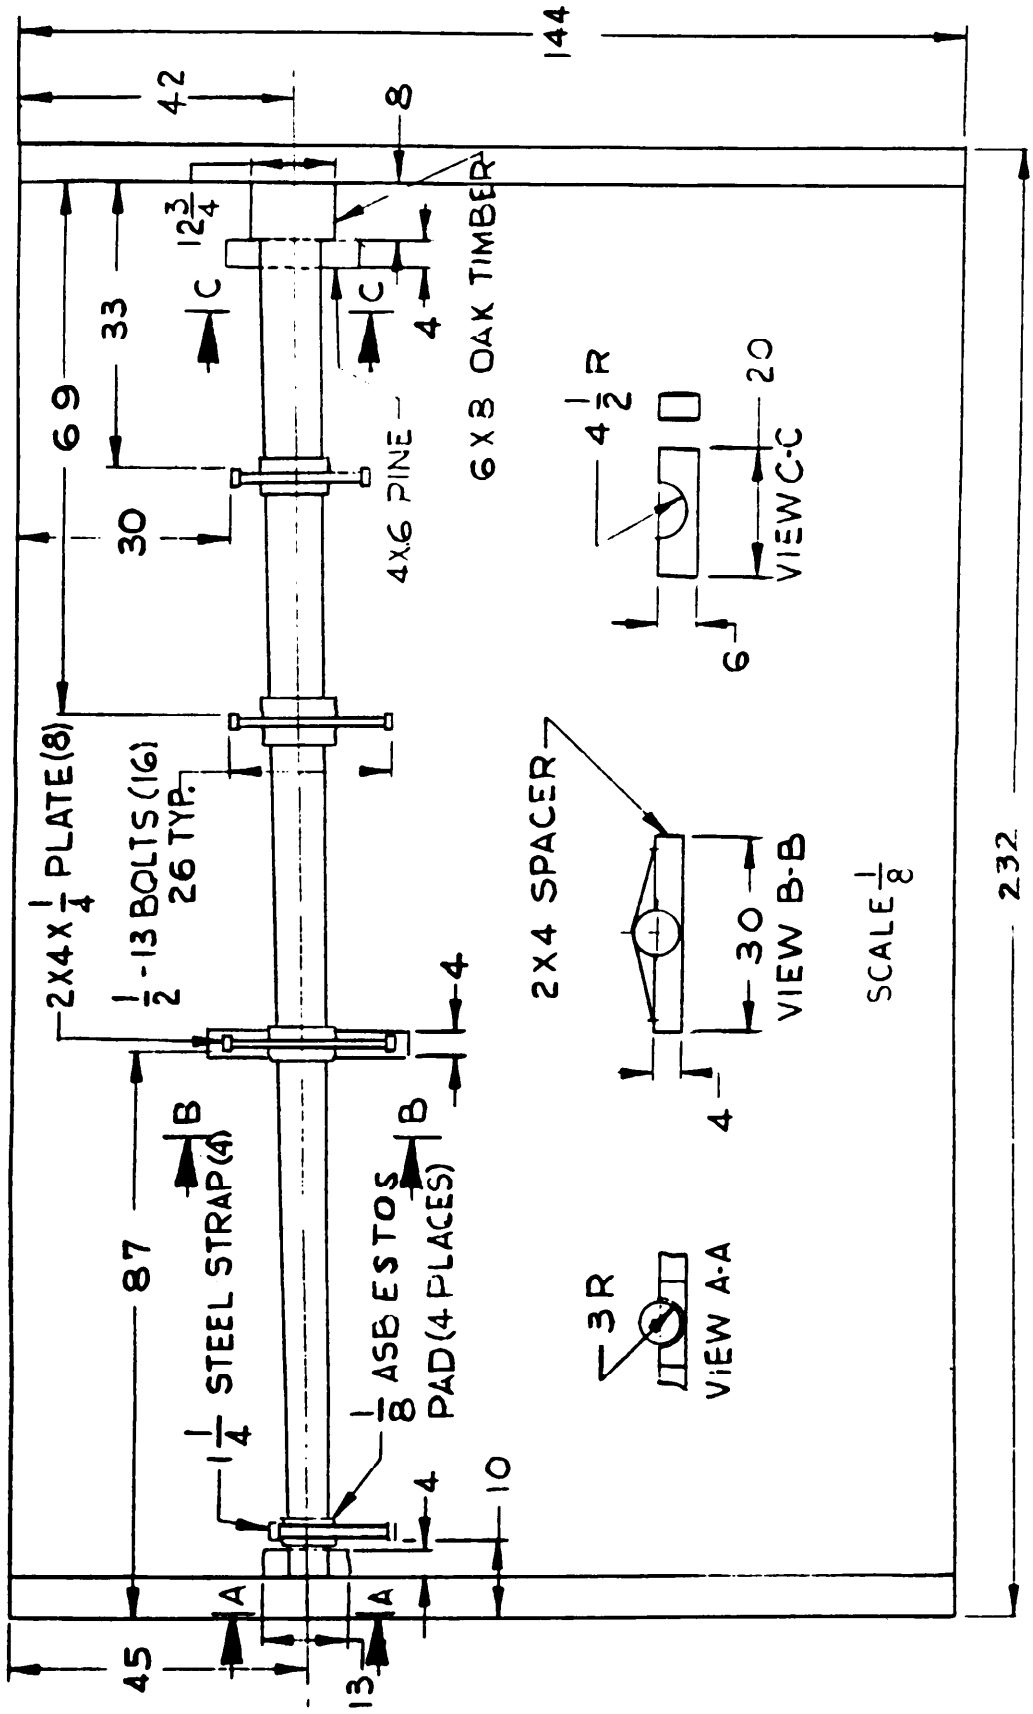


M30A1 TURRET GUNNERY TRAINER - GUN TUBE TIE-DOWN TO SKID
FIG 5

REF. FIG 31


Source: https://assist.dla.mil -- Downloaded: 2026l0-22T03:23Z
Check the source to verify that this is the currentversion before use.

M26-M30A1 TURRET GUNNERY TRAINERS –
STAND TO SHIPPING SKID LOCATORS
(SEE FIG 16)
FIG. 6

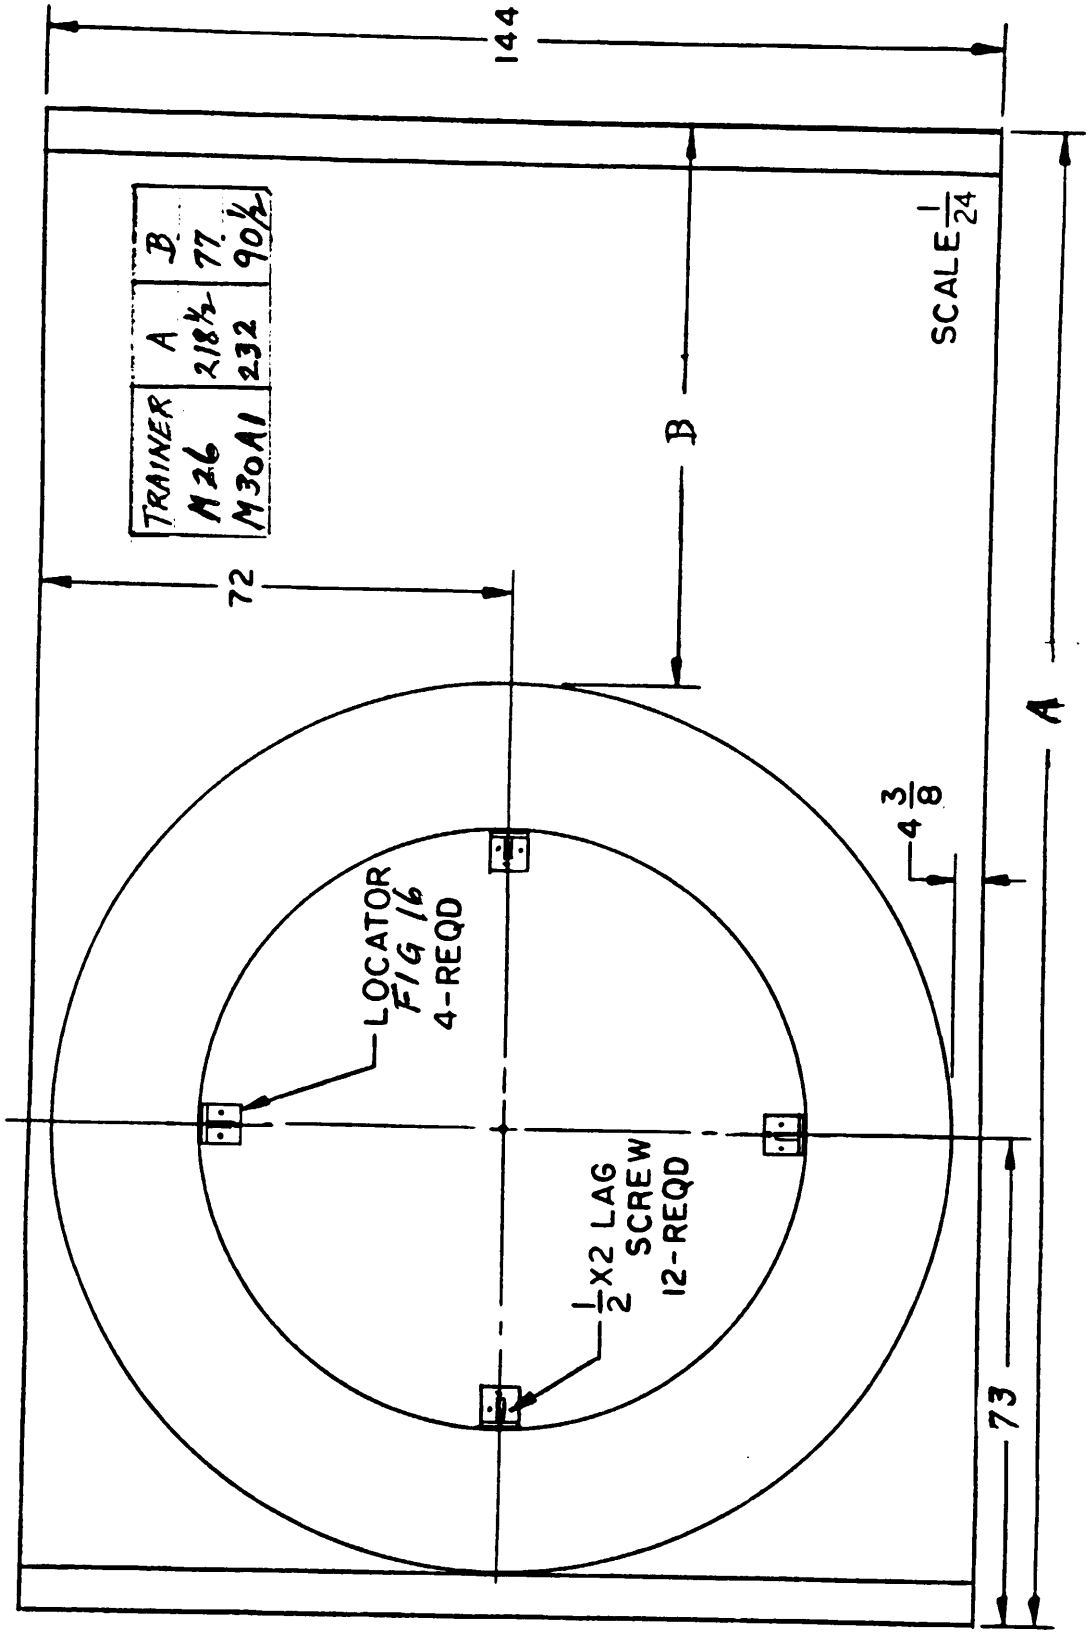


Source: https://assist.dla.mil -- Downloaded: 202610-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS -
TIE-DOWN OF TURRET
TO EYES ON SKID
FIG. 7

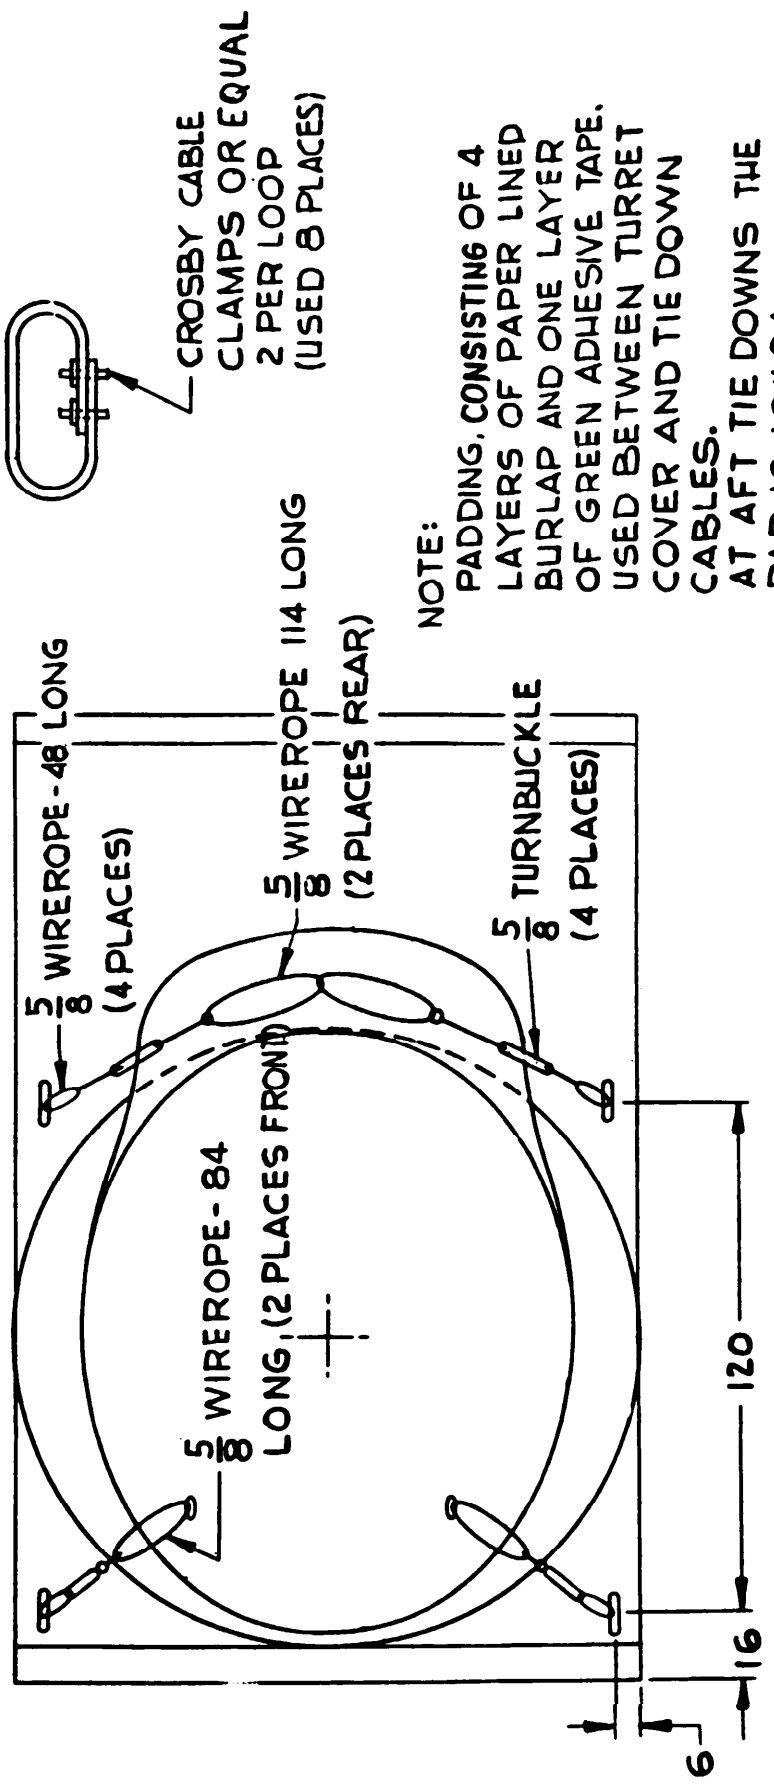

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:23Z
Check the source to verify that this is the current version before use.


M26-M30A1 TURRET GUNNERY TRAINERS - RIGHT FORE & AFT LOWER STAND OPENINGS FIG 8

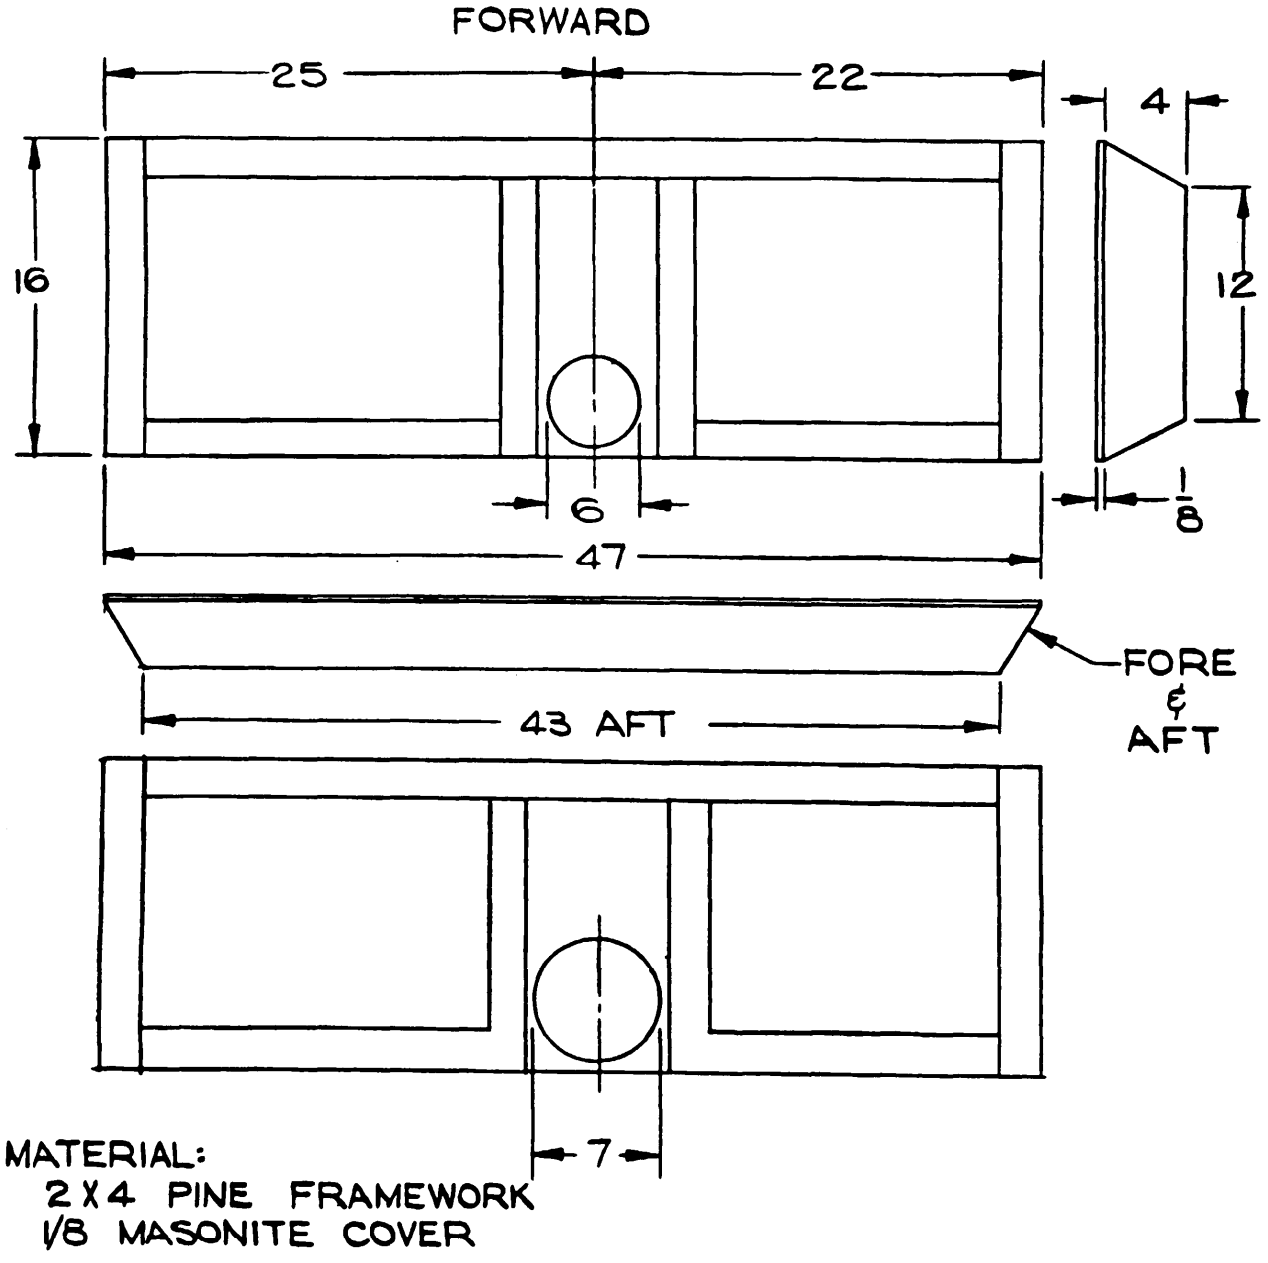

SCALE 1/8

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:23Z
Check the source to verify that this is the currentversion before use.

M26-M30A1 TURRET GUNNERY TRAINERS-
RIGHT & LEFT INTERMEDIATE LOWER STAND OPENINGS
FIG. 9

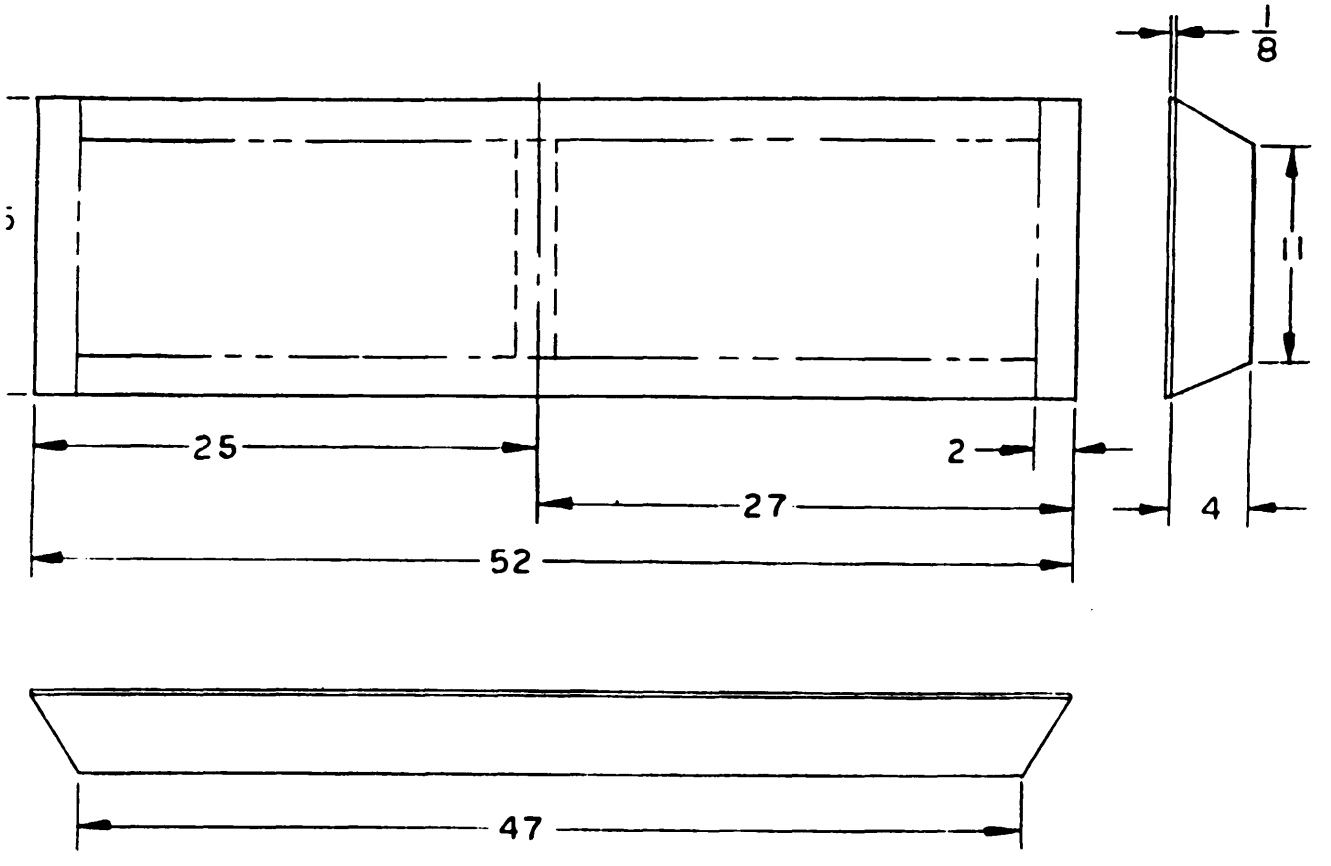


SCALE 1/8

MATERIAL:
2X4 PINE
1/8 MASONITE COVER


Source: https://assist.dla.mil -- Downloaded: 202610-22T03:23Z
Check the source to verify that this is the current version before use.

M30A1 TURRET GUNNERY TRAINER –
RECTIFIER BOX STRAPPING RETAINER BRACKETS
(SEE FIG 28)
FIG 10

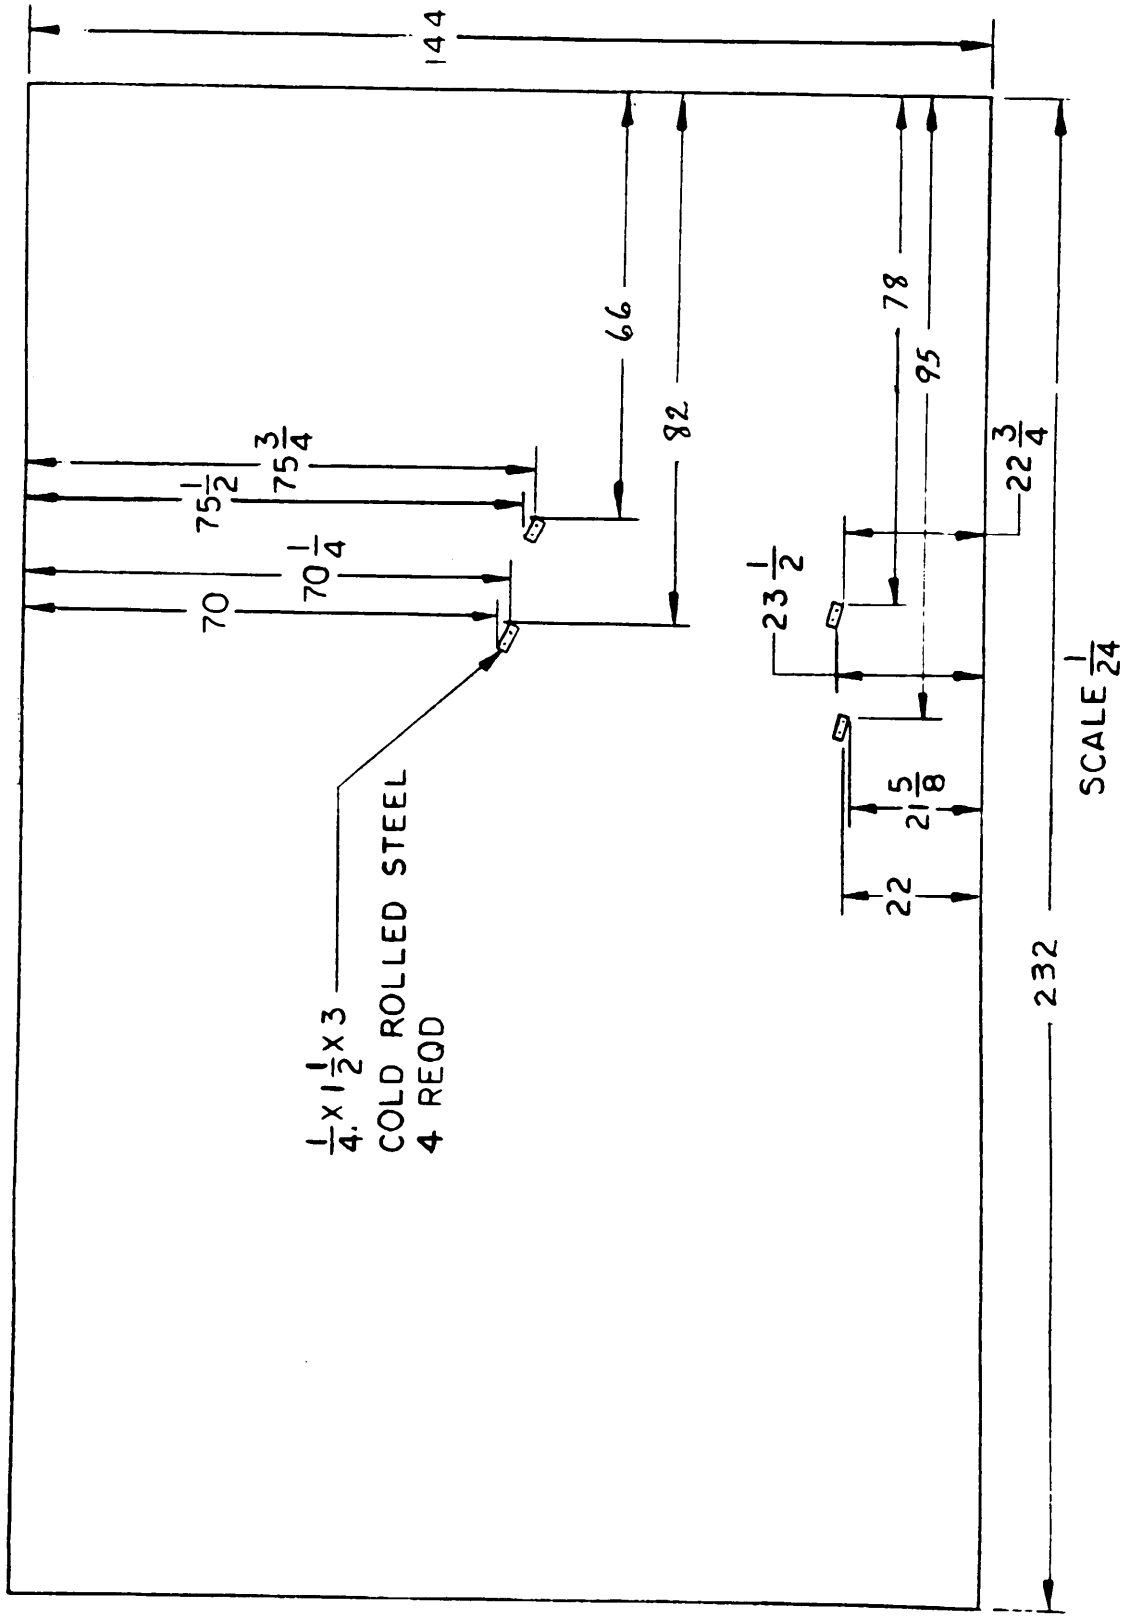

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:23Z
Check the source to verify that this is the current version before use.


M30A1 TURRET GUNNERY TRAINER -
STOWAGE BOX LOCATION ON SHIPPING SKID
FIG 11

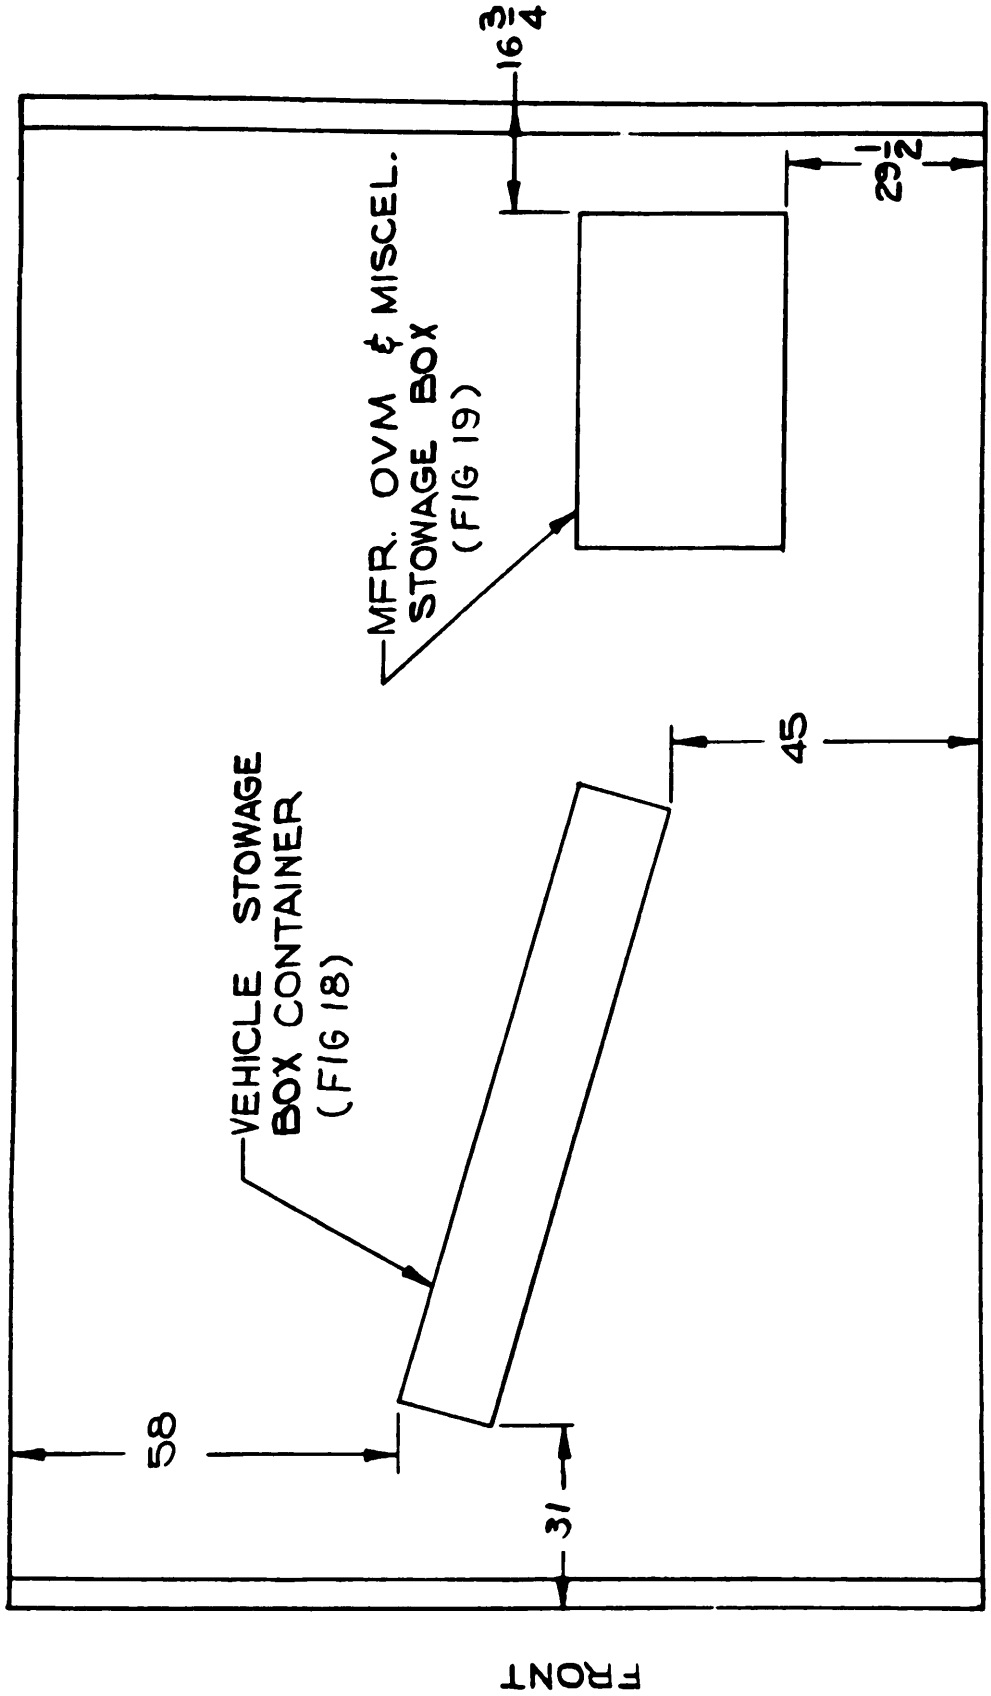

SCALE 1/24


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30 A1 TURRET GUNNERY TRAINERS -
OBSERVATION PLATFORM SUPPORT
& TIE-DOWN SEE FIGS 20-21-22
FIG. 12

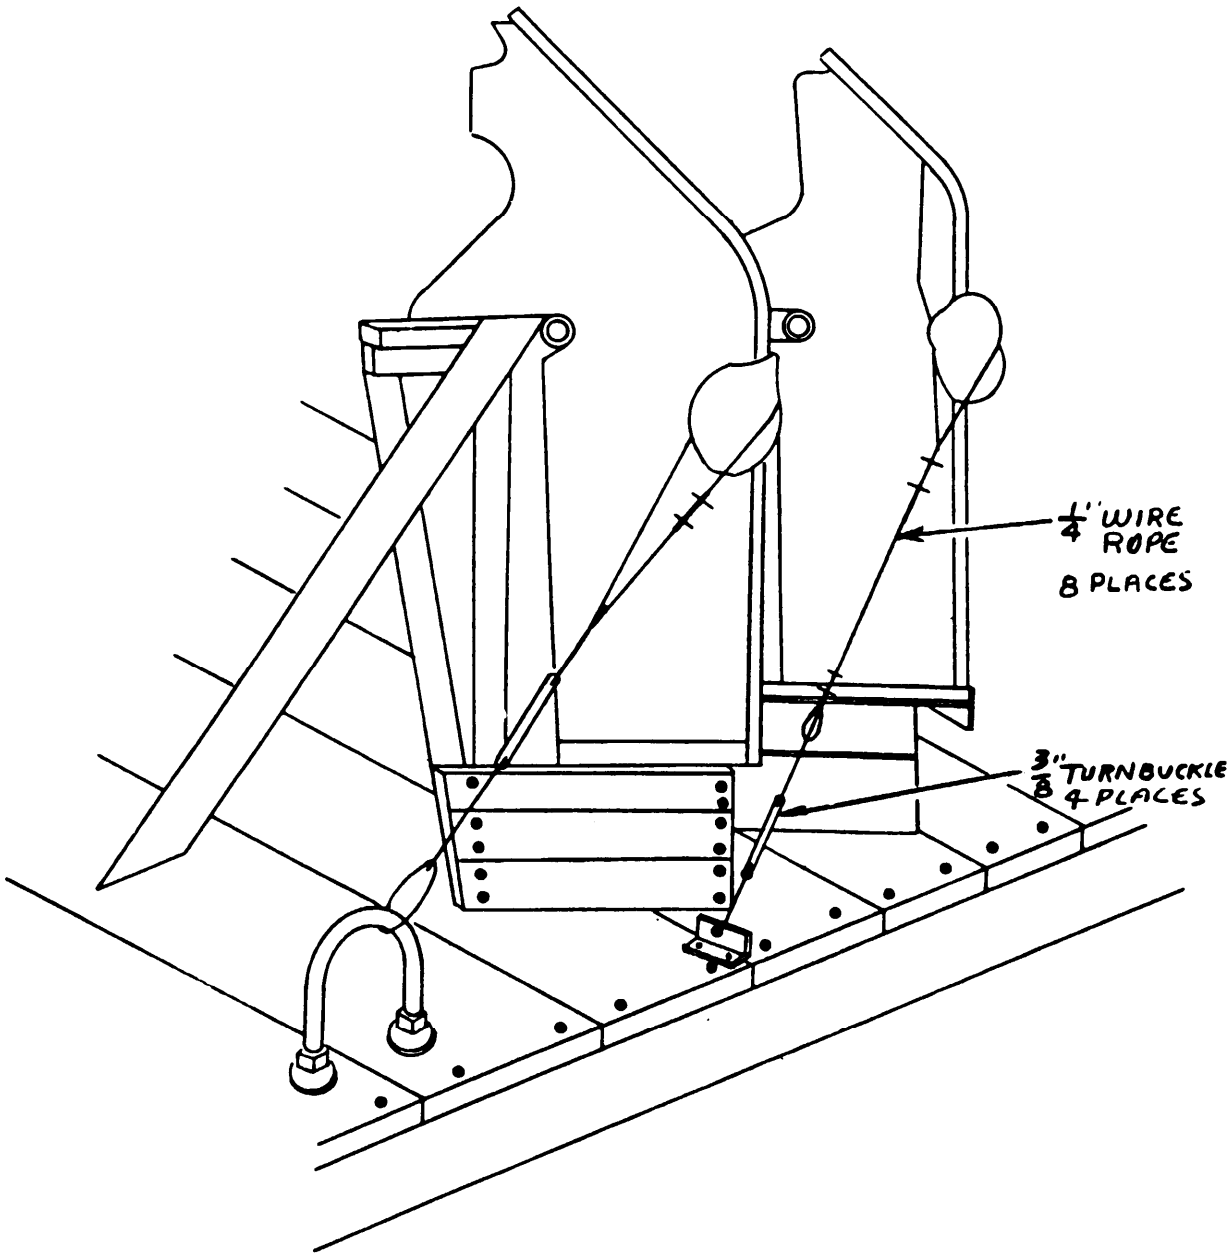


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M30A1 TURRET GUNNERY TRAINER-
PLATFORM TIE-DOWN TO SKID
DEPOT OVM MOUNT ON STOWED PLATFORMS
(SEE FIG 33)
FIG. 13

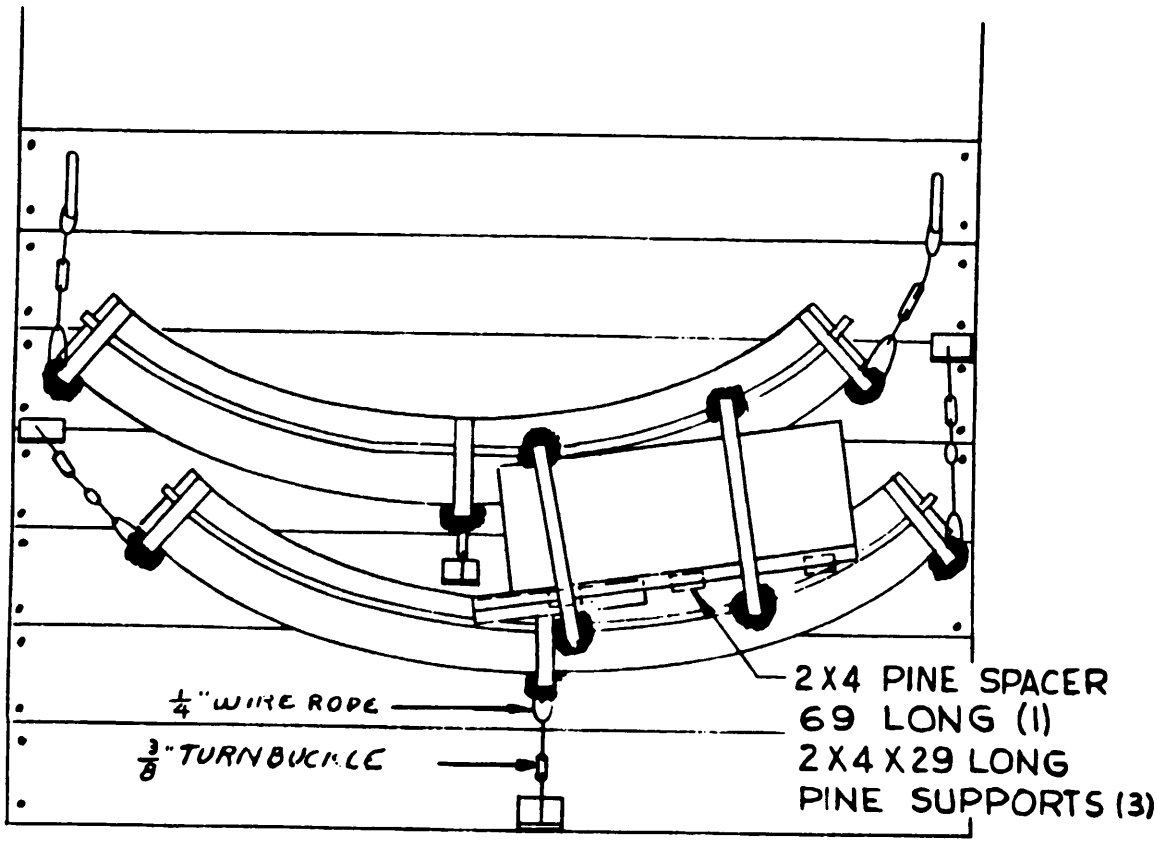

Source: https://assist.dla.mil -- Downloaded: 20261O-22T03:23Z
Check the source to verify that this is the current version before use.

M26 – M30A1 TURRET GUNNERY TRAINERS –
REINFORCING PLATES UNDER TURRET TIE-DOWNS
(SEE FIG. 3)
FIG. 14

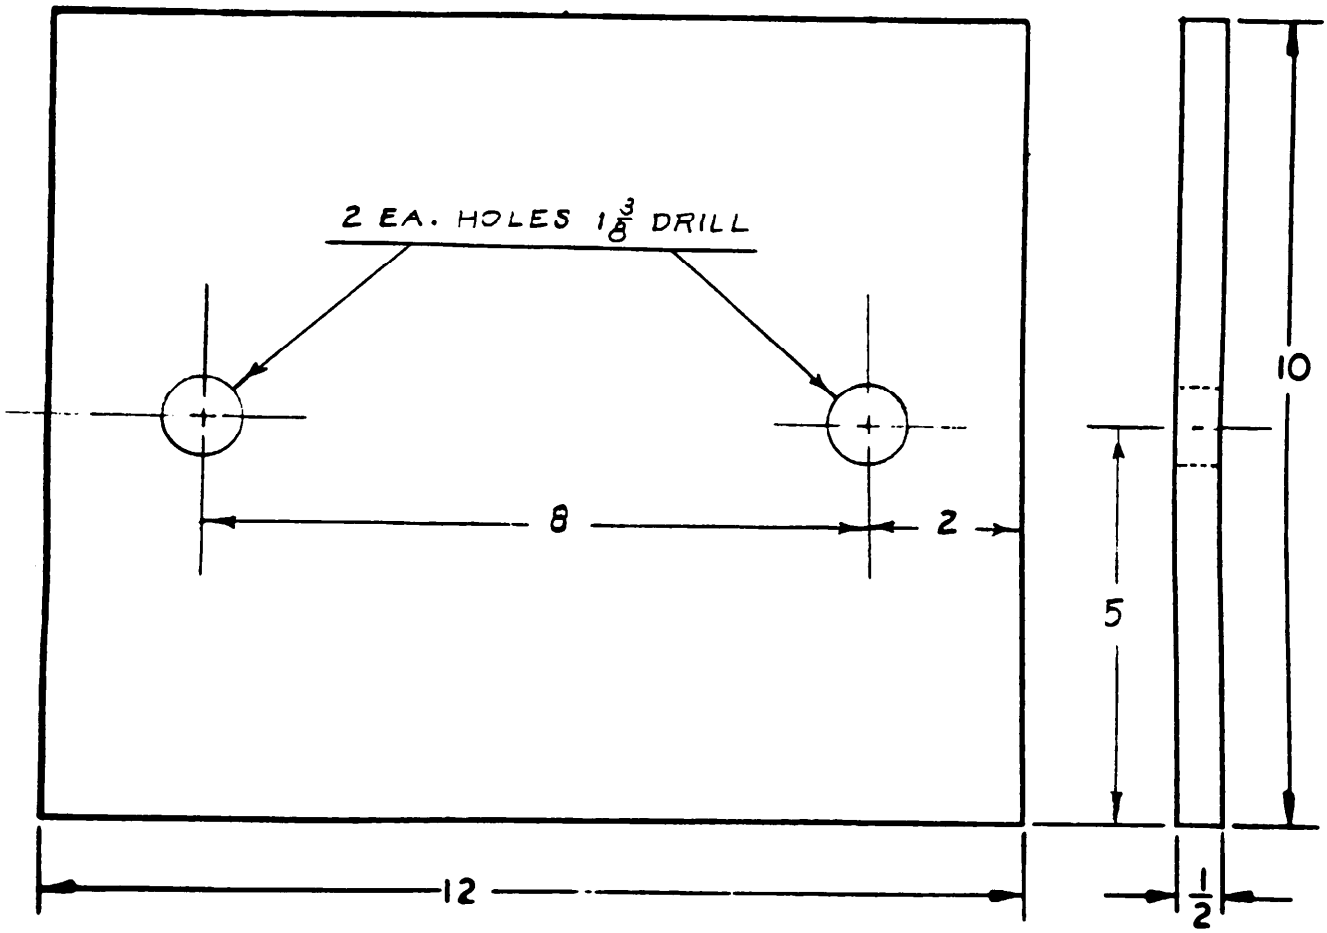


SCALE 1/2

MATERIAL:
COLD ROLLED STEEL
1/2 THICK

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS *SHIPMENT*
TURRET STAND TO SHIPPING *SKID* REINFORCING PLATES
(SEE FIG. 4)

FIG 15

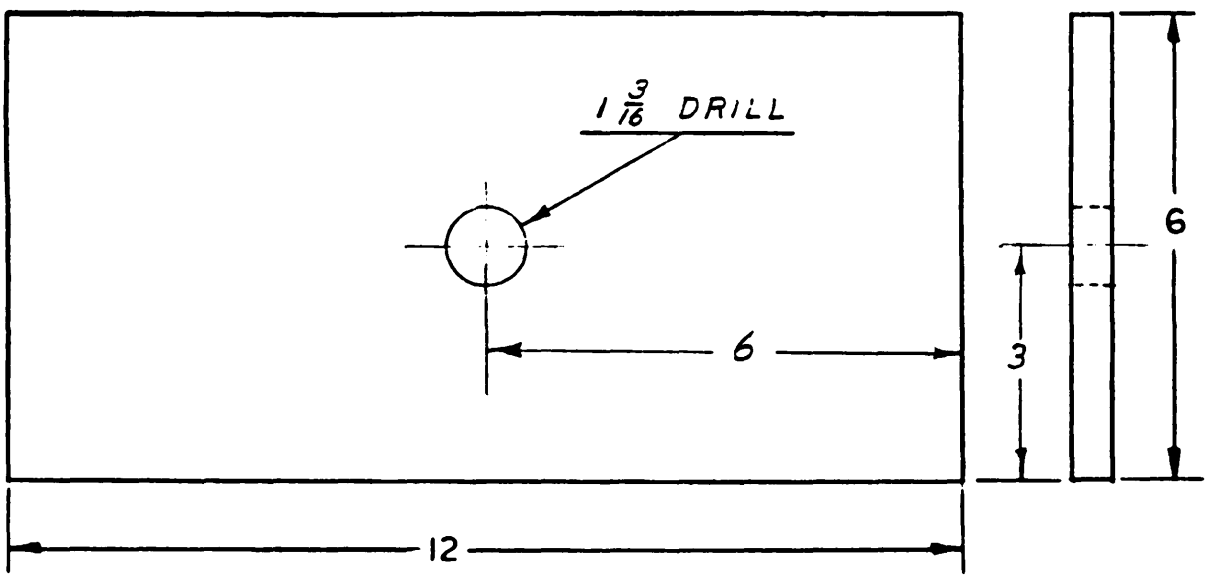


SCALE 1/2

MATERIAL:
COLD ROLLED STEEL
1/2 THICK

Source: https://assist.dla.mil -- Downloaded: 202610-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS -
LOCATOR - TURRET STAND TO SHIPPING SKID
(SEE FIGURE 6.)

FIG 16

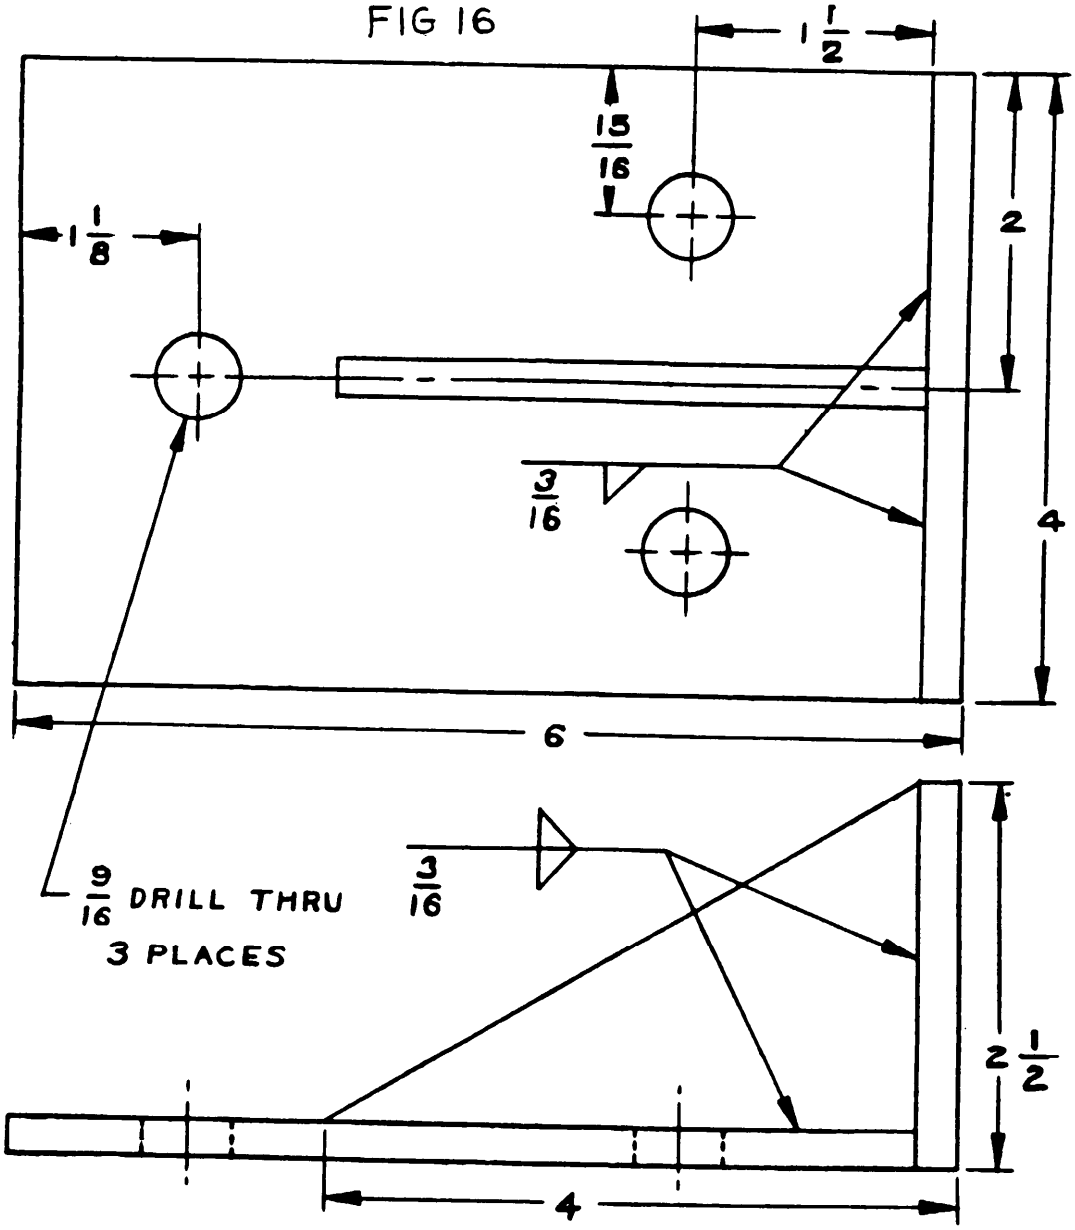


MATERIAL:
COLD ROLLED STEEL
1/4 THICK
4 REQ'D PER VEHICLE

SCALE +

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS
PORT CLOSURE RETAINING BRACKET

FIG 17

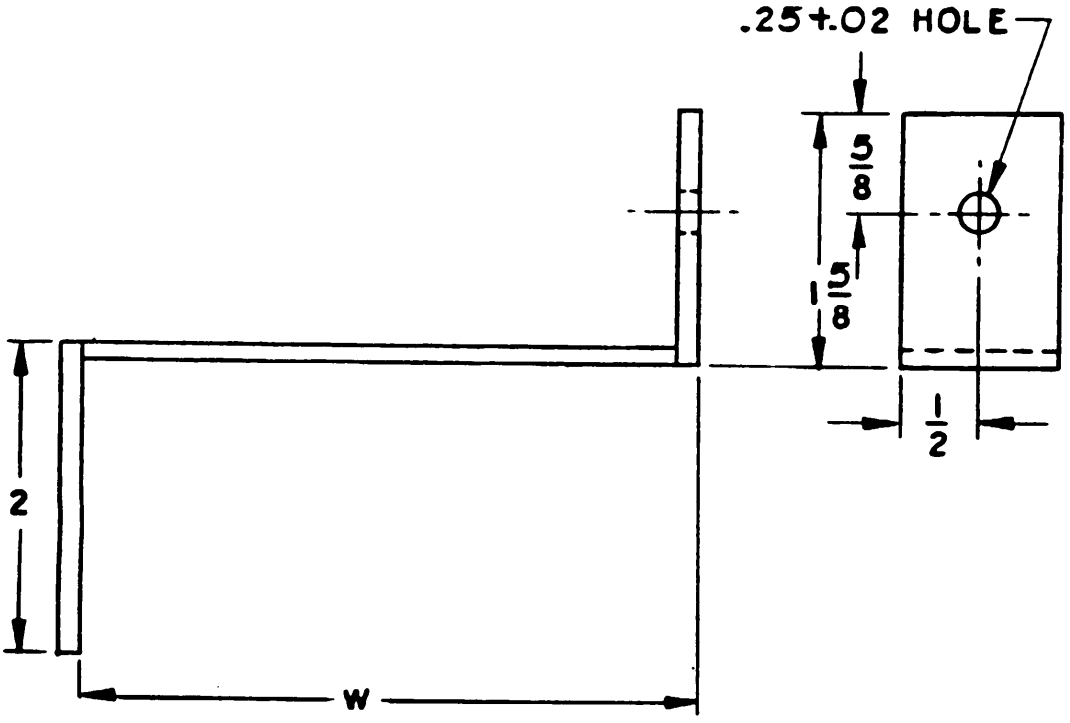

W = THE WIDTH DETERMINED BY THICKNESS OF TURRET AT MOUNTING POINT


MATERIAL:
COLD ROLLED STEEL
1/8 X 1 X 8-1/2 LG.

SCALE 1/1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS – STOWAGE BOX SHIPPING CONTAINER (SEE FIG. 11)

FIG. 18

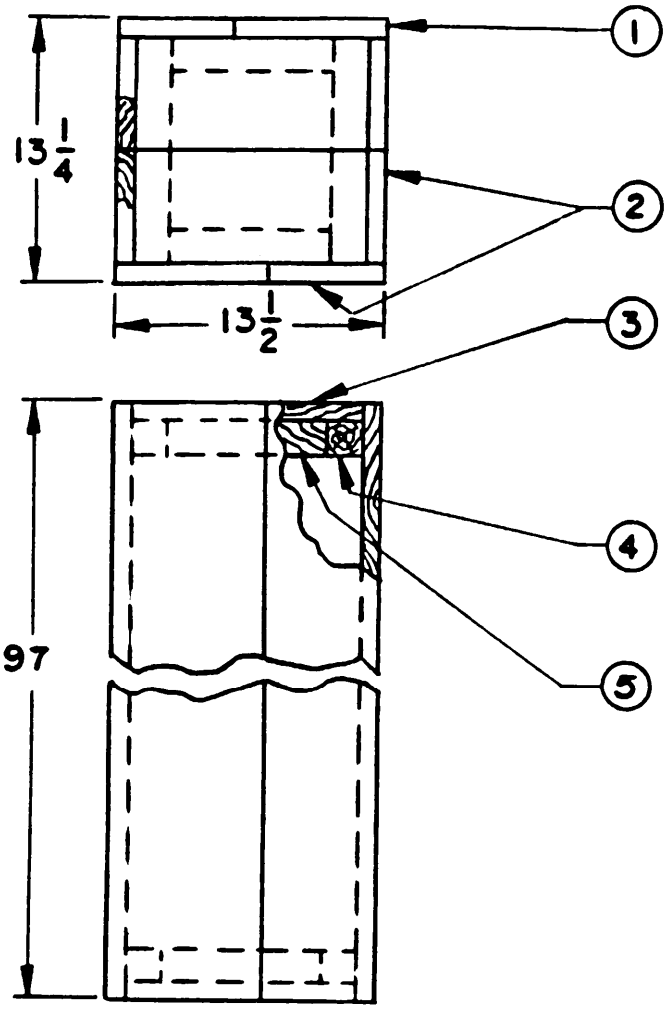

MATERIAL: PINE

SCALE 1/8


ITEM	SIZE	QUANTITY
1	1 X 8 X 97	2
2	1 X 6 X 97	6
3	1 X 6 X 12	4
4	2 X 4 X 12	4
5	2 X 4 X 8	4

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS — STOWAGE BOX-MANUFACTURERS OVM

(SEE FIG. 11)

FIG. 19

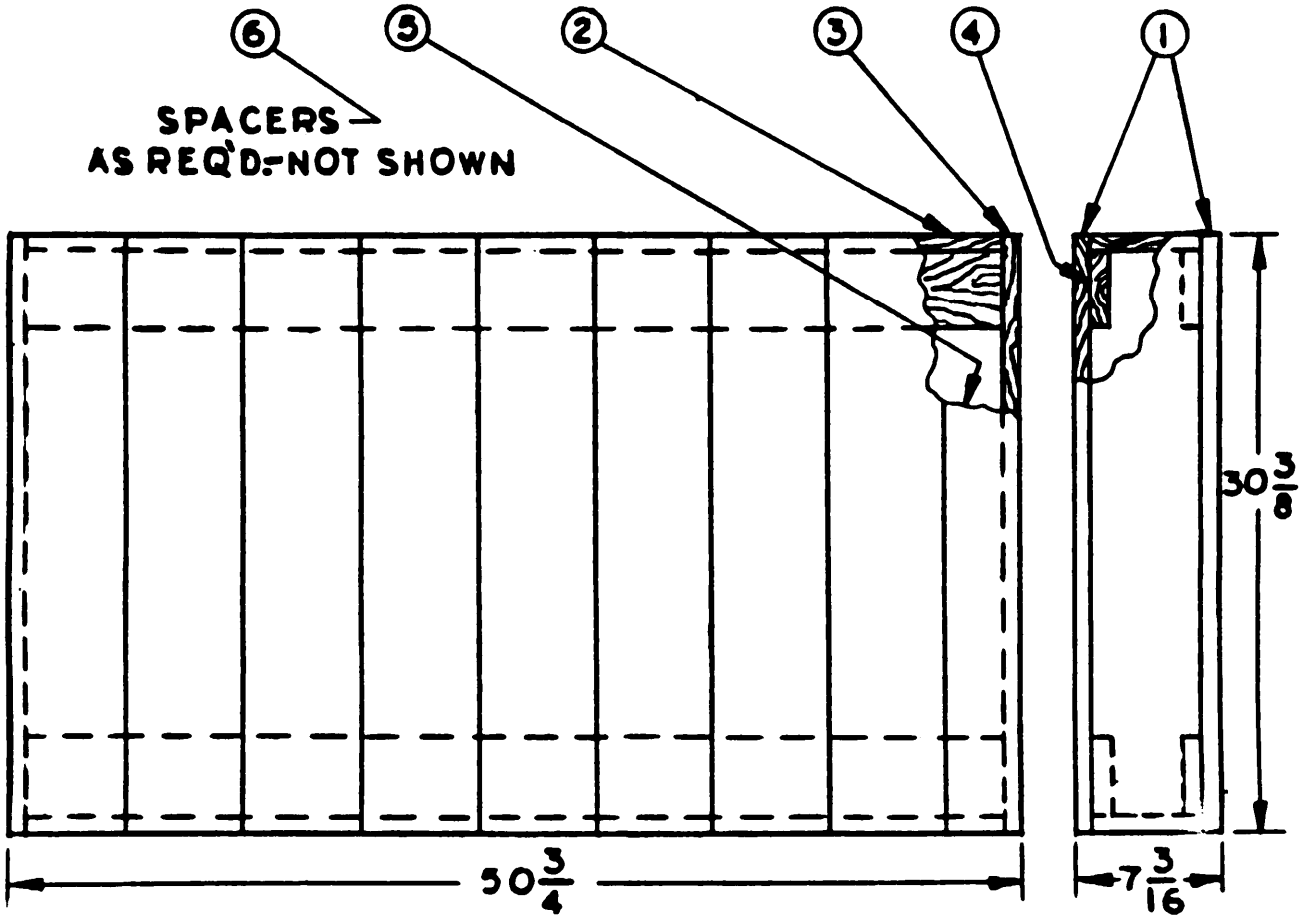

SCALE 1/8


MATERIAL: PINE

ITEM	SIZE	QUANTITY
1	1X6X30-3/8	16
2	1X6X49	2
3	1X6X30-3/8	2
4	1X4X49	4
5	1X5X30-3/8	2
6	2X4X TO SUIT	TO SUIT

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS -
LEFT & RIGHT END SUPPORTS, TURRET PLATFORM
LEFT SHOWN

FIG. 20

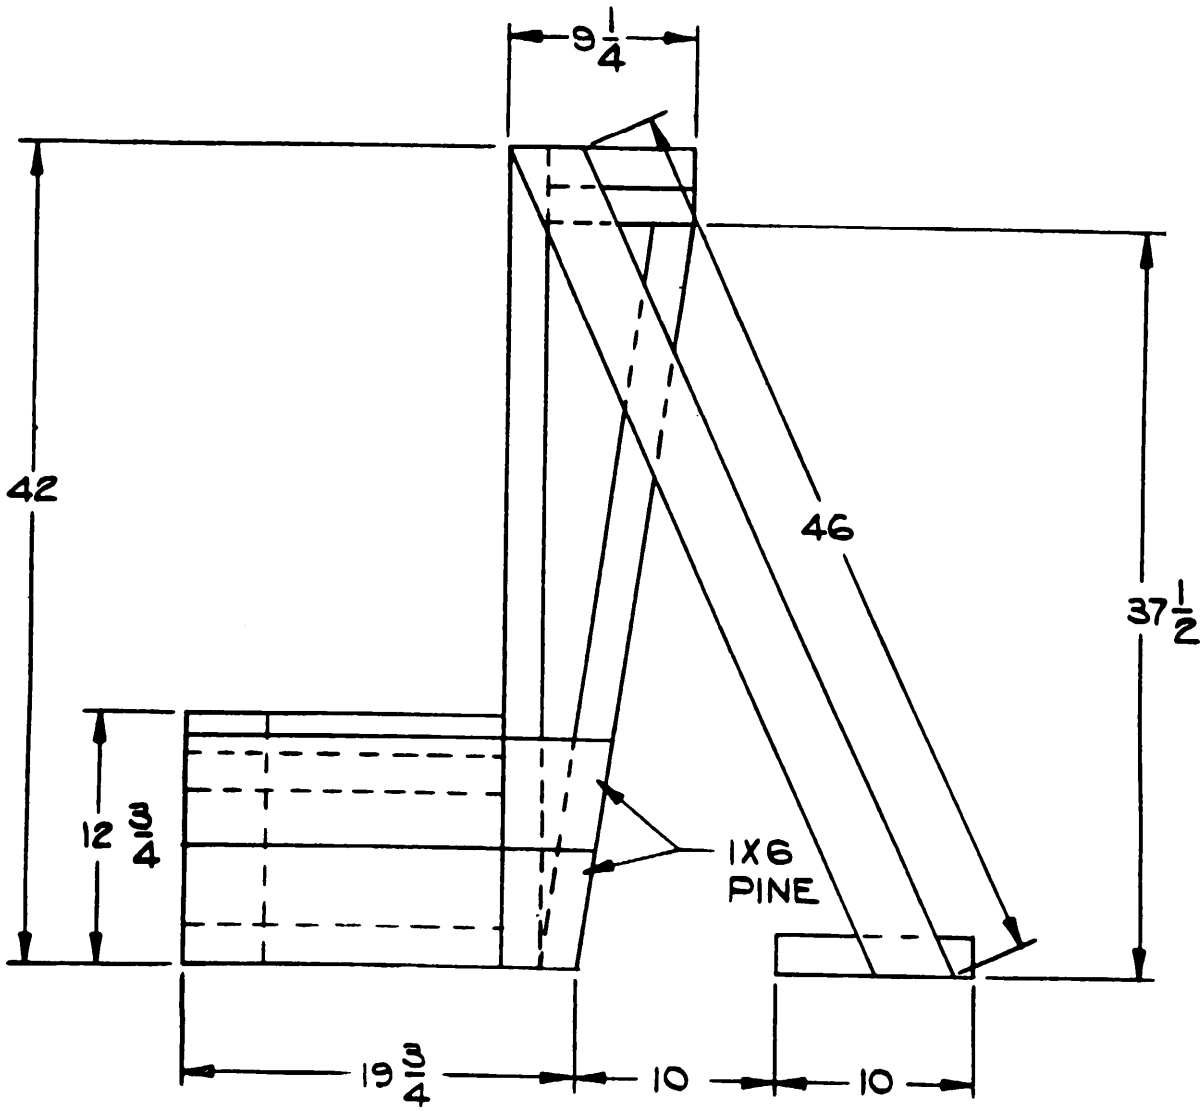


MATERIAL:
2X4 PINE ___ 19 FT
1X6 PINE ___ 5 FT

SCALE 1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS - CENTER SUPPORT, TURRET PLATFORM

FIG. 21

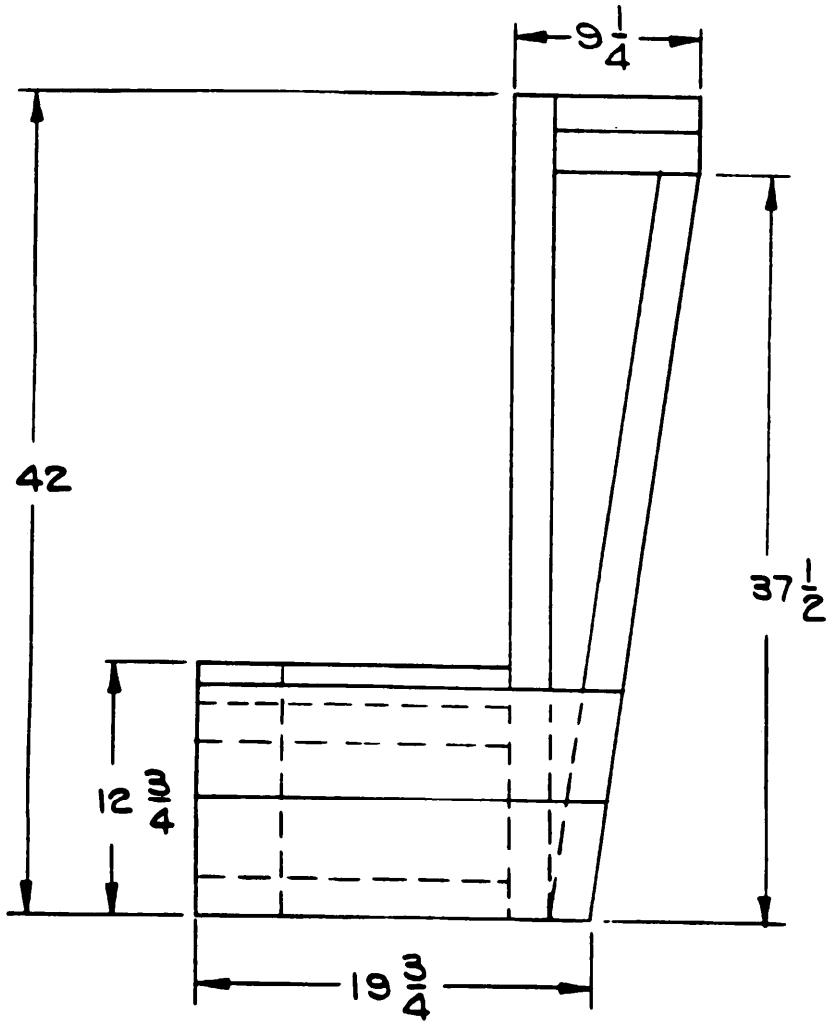


MATERIAL:
2X4 PINE _ _ _ 14 FT
1 X6 PINE _ _ _ 4 FT

SCALE 1/8

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.


M30A1 TURRET GUNNERY TRAINER -
SKID-TIE DOWNS

FIG 22

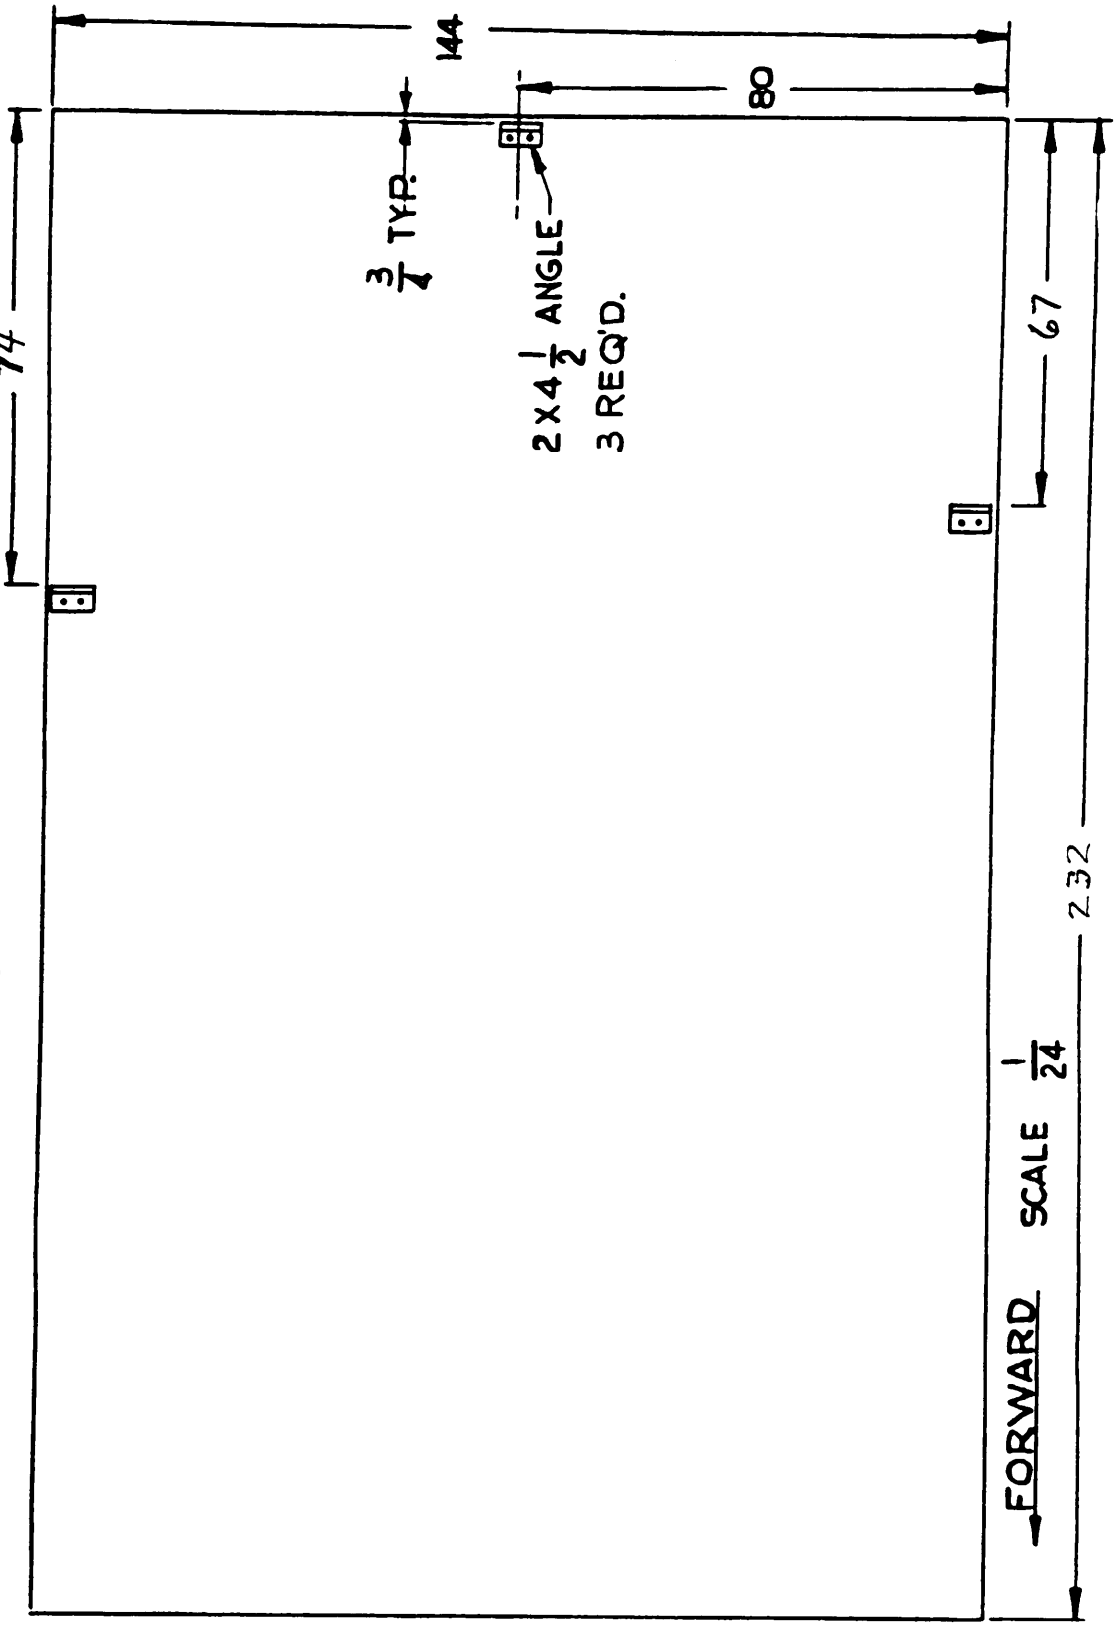

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M26-M30A1 TURRET GUNNERY TRAINERS - BOX
DEPOT OVM- SHIPPED AS RECEIVED (SEE FIG 33)
FIG 23

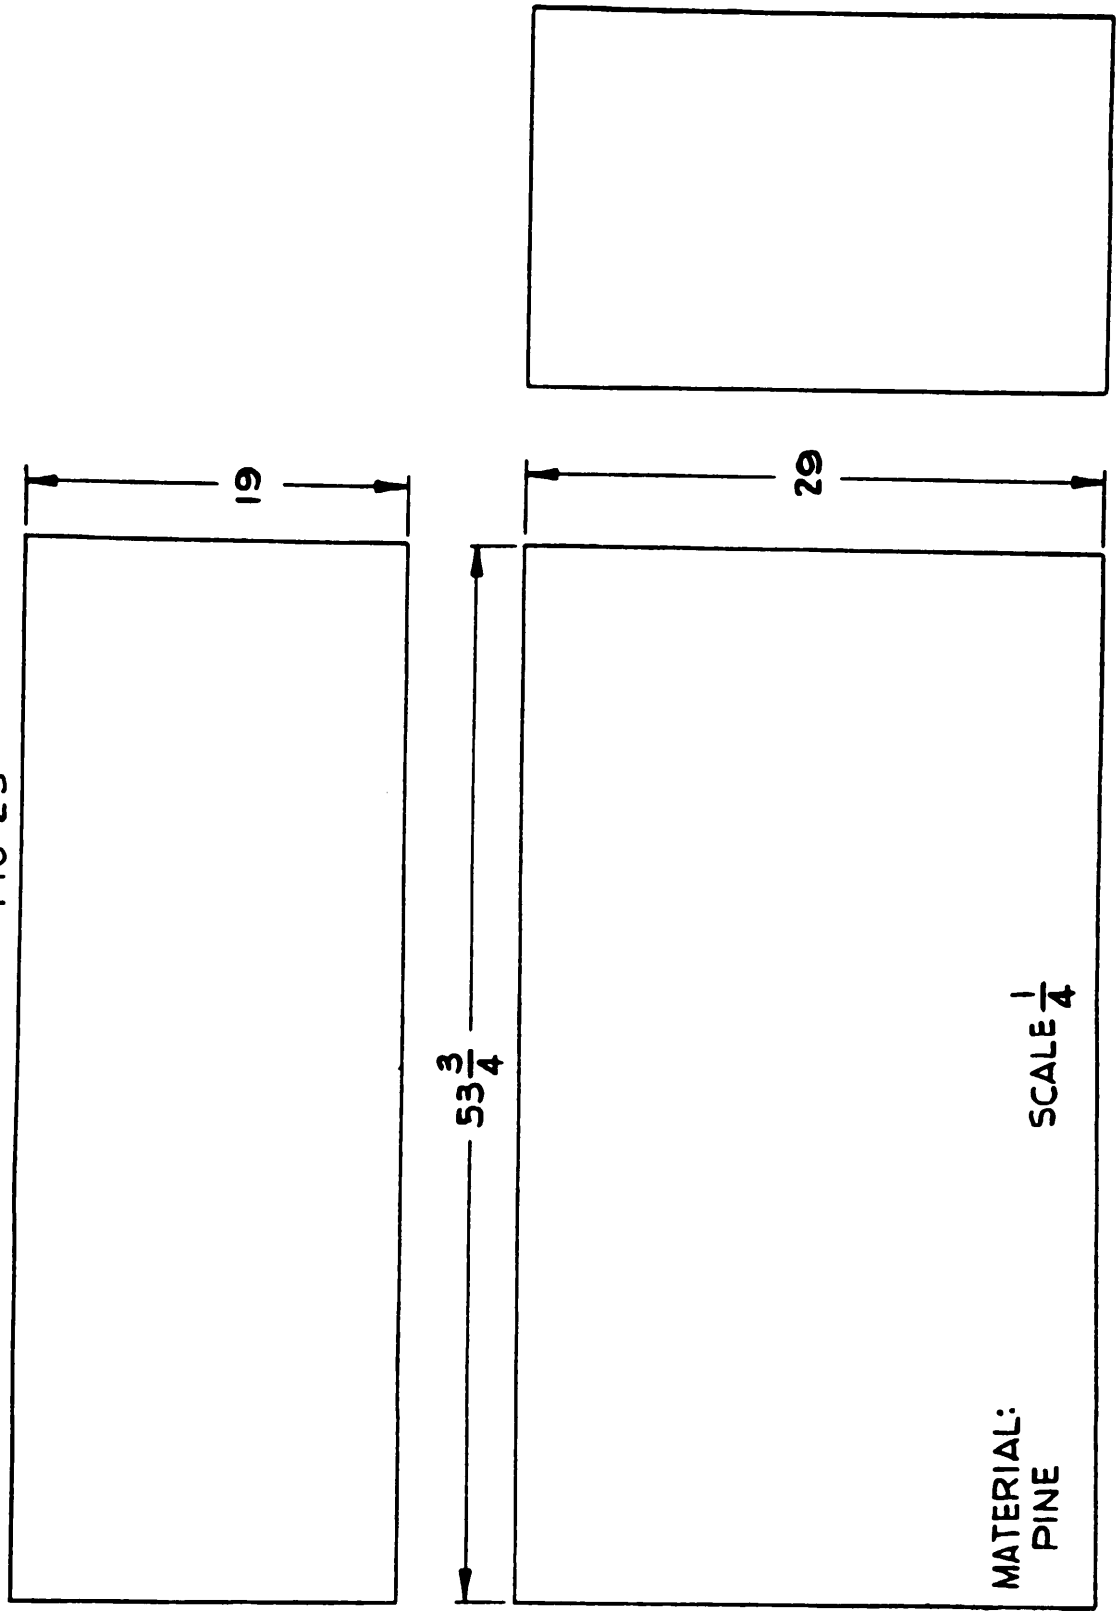


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

M30 A1 TURRET GUNNERY TRAINER


DEPOT OVM-MOUNTING ON SKID
(SEE FIGS 12 AND 33)

FIG 24

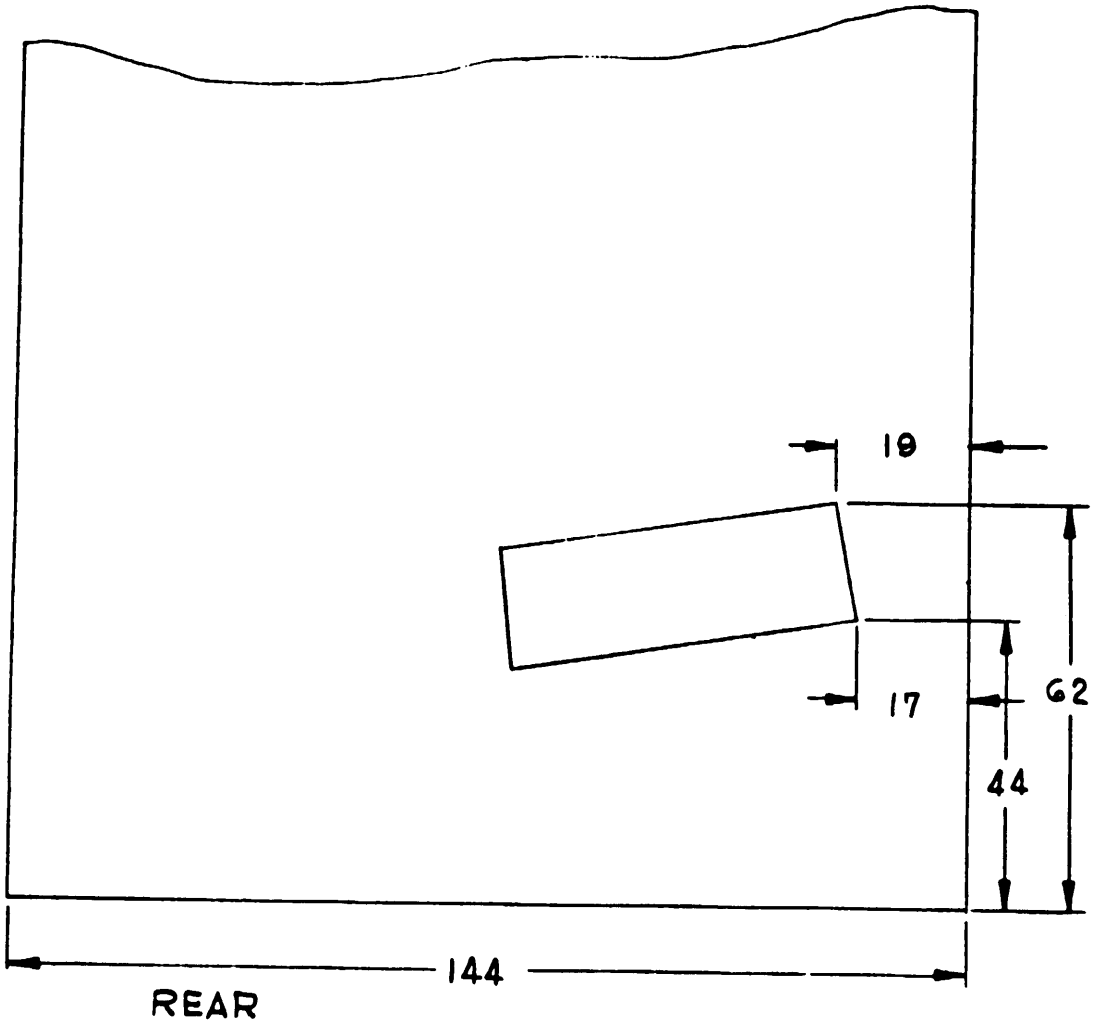

SCALE: NONE


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

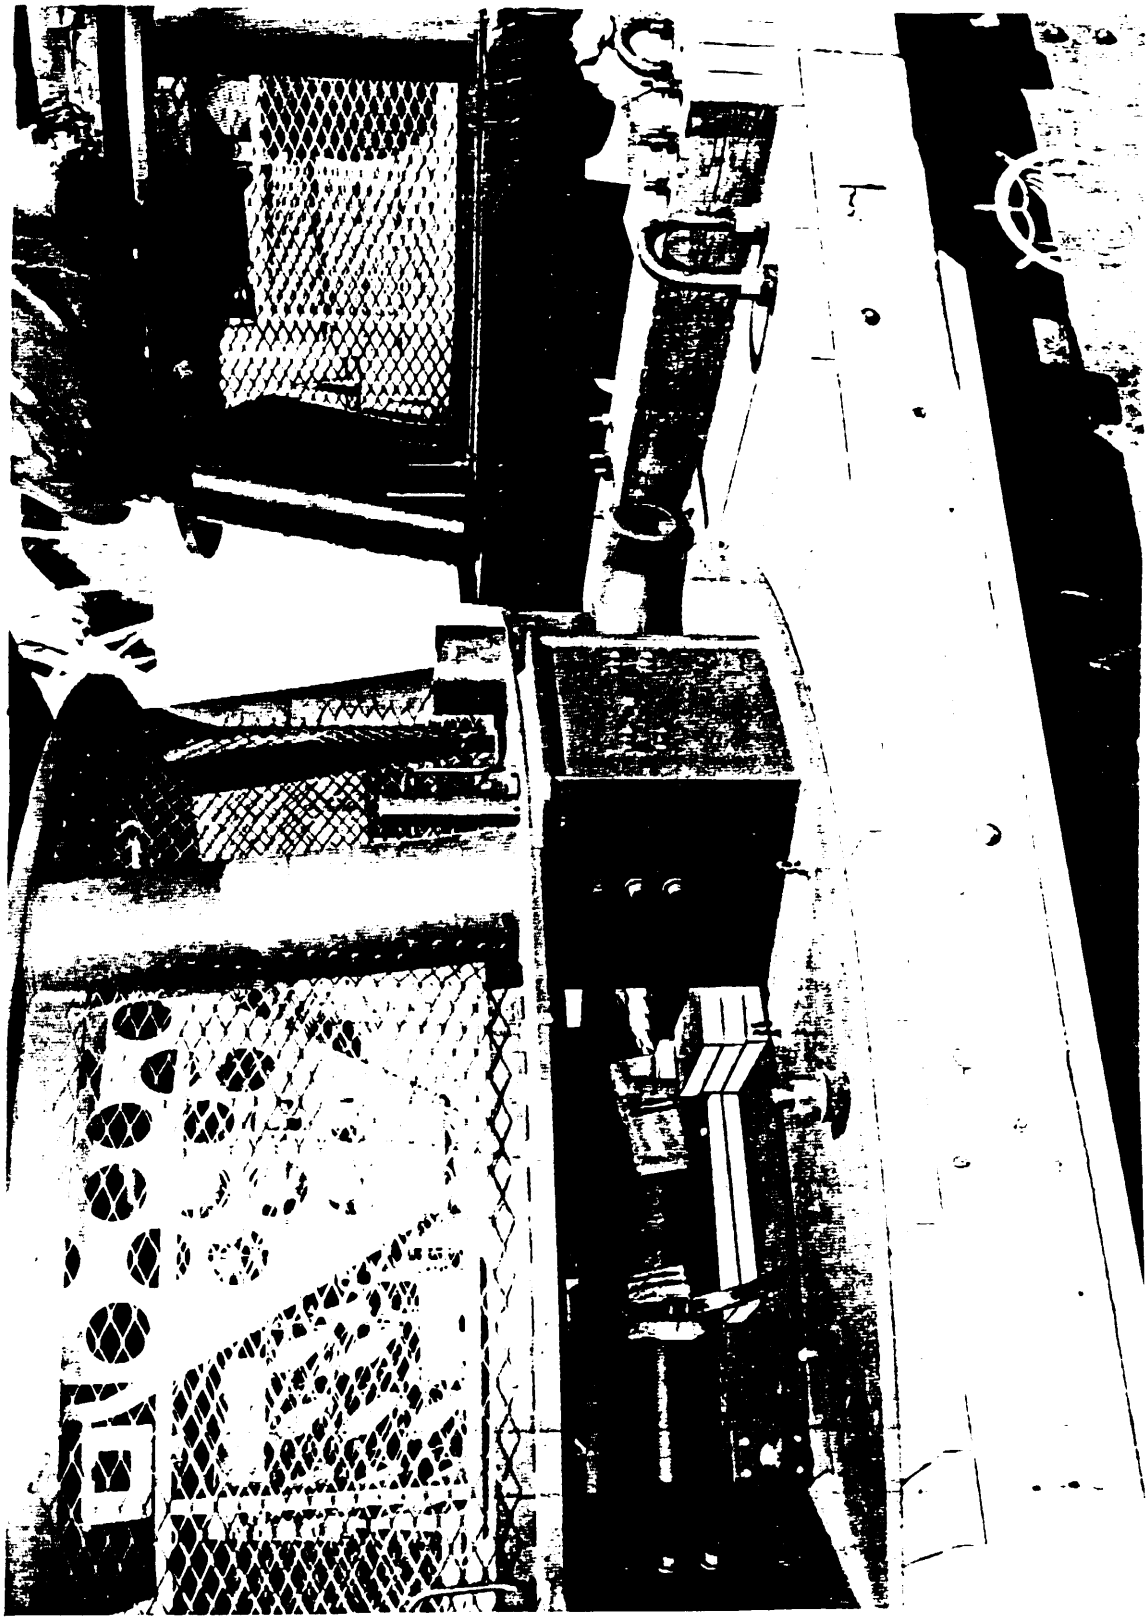

M26 TURRET GUNNERY TRAINER MOUNTED ON SKID FOR LEVEL A & B SHIPMENTS.
NOTE BLOCKING AND SECUREMENT OF GUN TUBE.


FIG 25

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

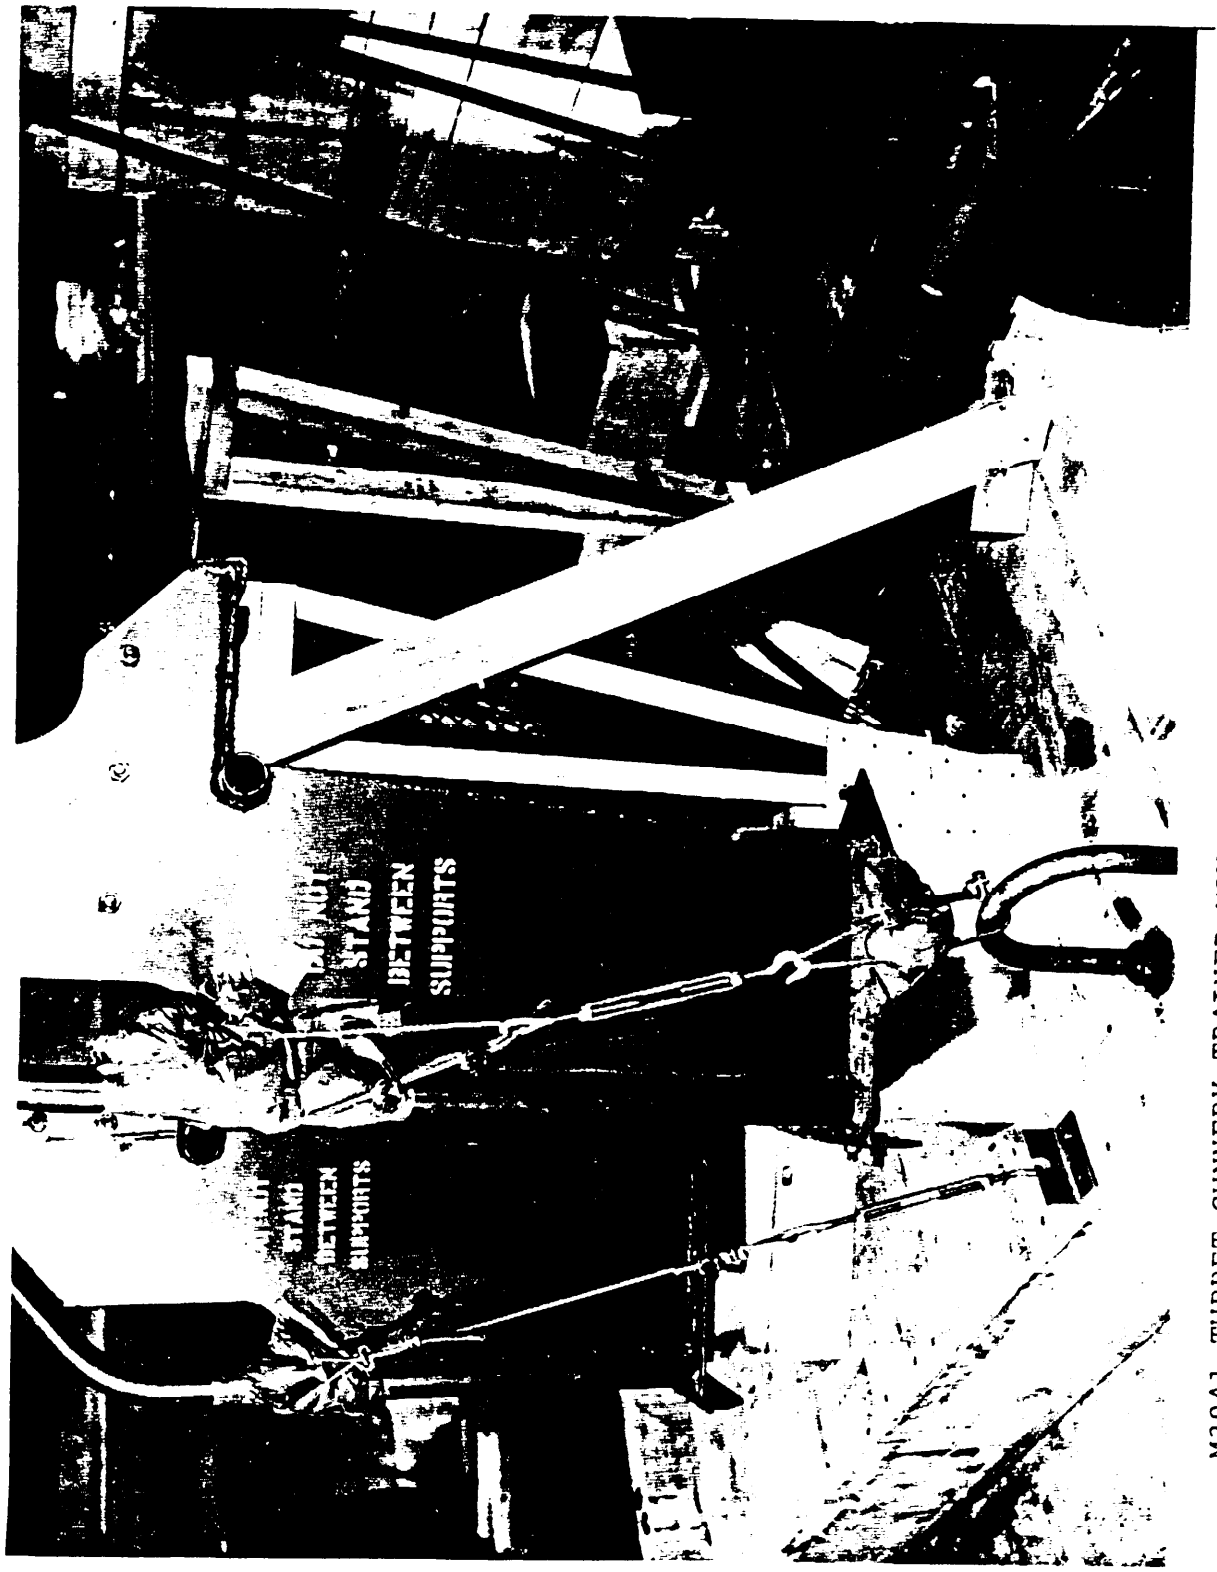

M30A1 TURRET GUNNERY TRAINER MOUNTED ON SKID FOR LEVEL A & B SHIPMENT.
NOTE POSITION AND SECUREMENT OF OBSERVER PLATFORMS AND M60 GUN TUBE.
ALSO NOTE THE LARGE RECTIFIER CONTAINER ON FAR RH SIDE.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T03:23Z
Check the source to verify that this is the currentversion before use.

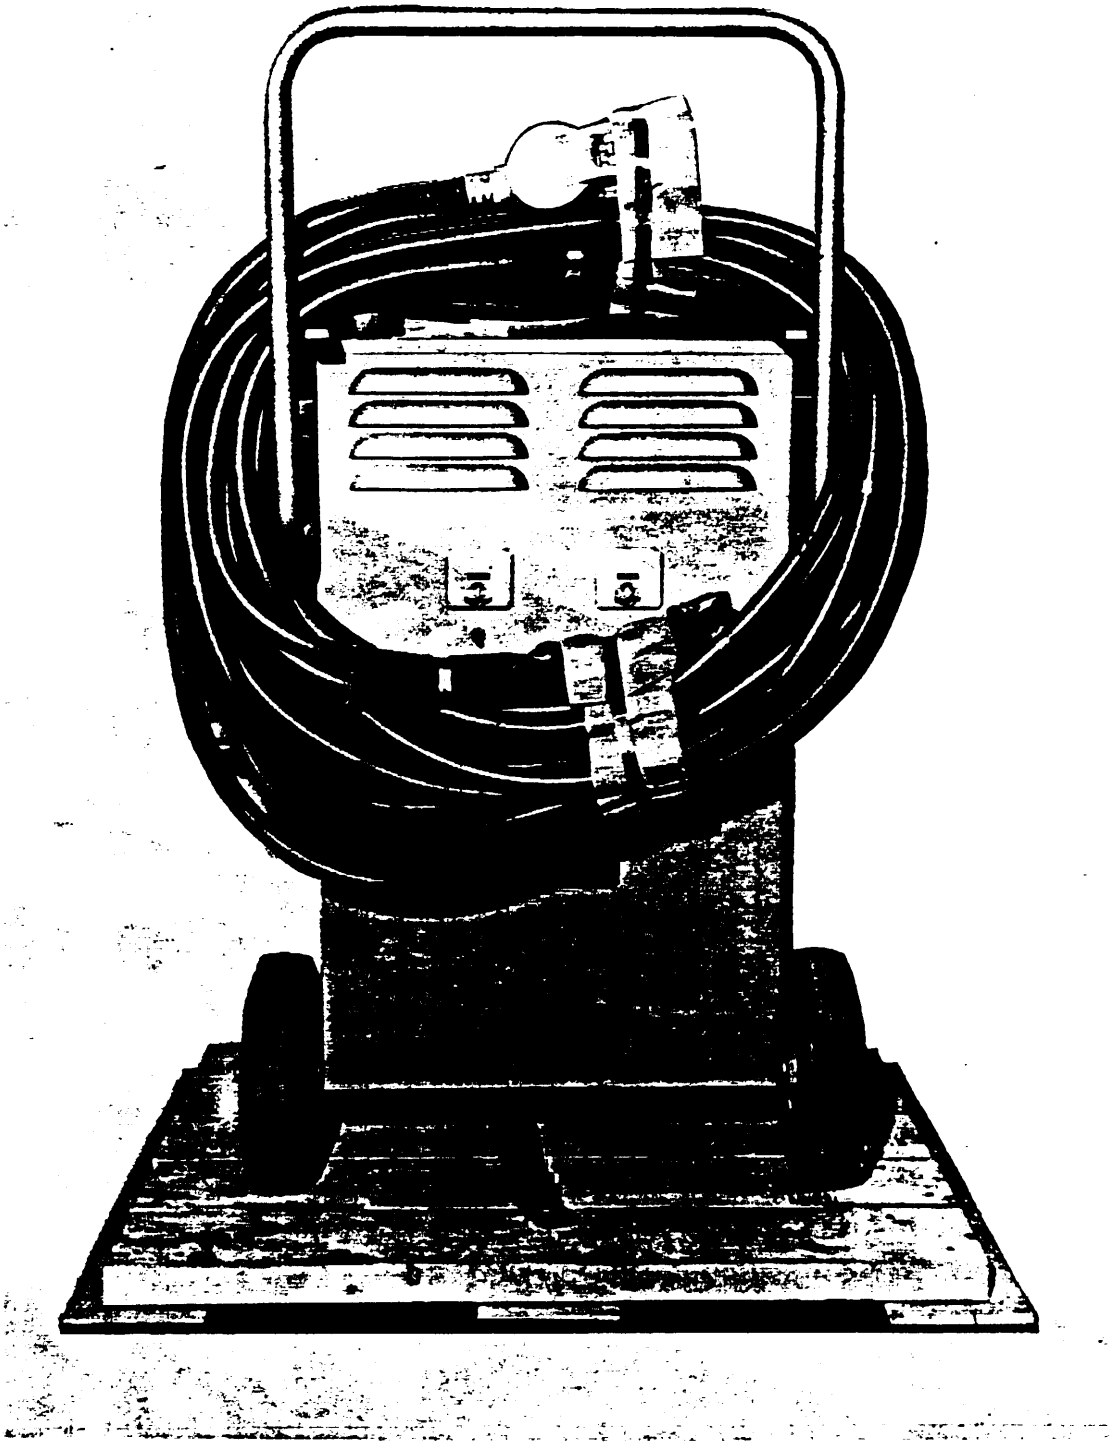

POWER RECTIFIER, WITH OPERATING CABLE, ANCHORED ON CONTAINER BASE.

FIG 27


Source: https://assist.dla.mil -- Downloaded: 20261O-22T03:23Z
Check the source to verify that this is the currentversion before use.



POWER RECTIFIER MOUNTED AND SECURED ON M30A1 TRAINER SKID.

FIG 28


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

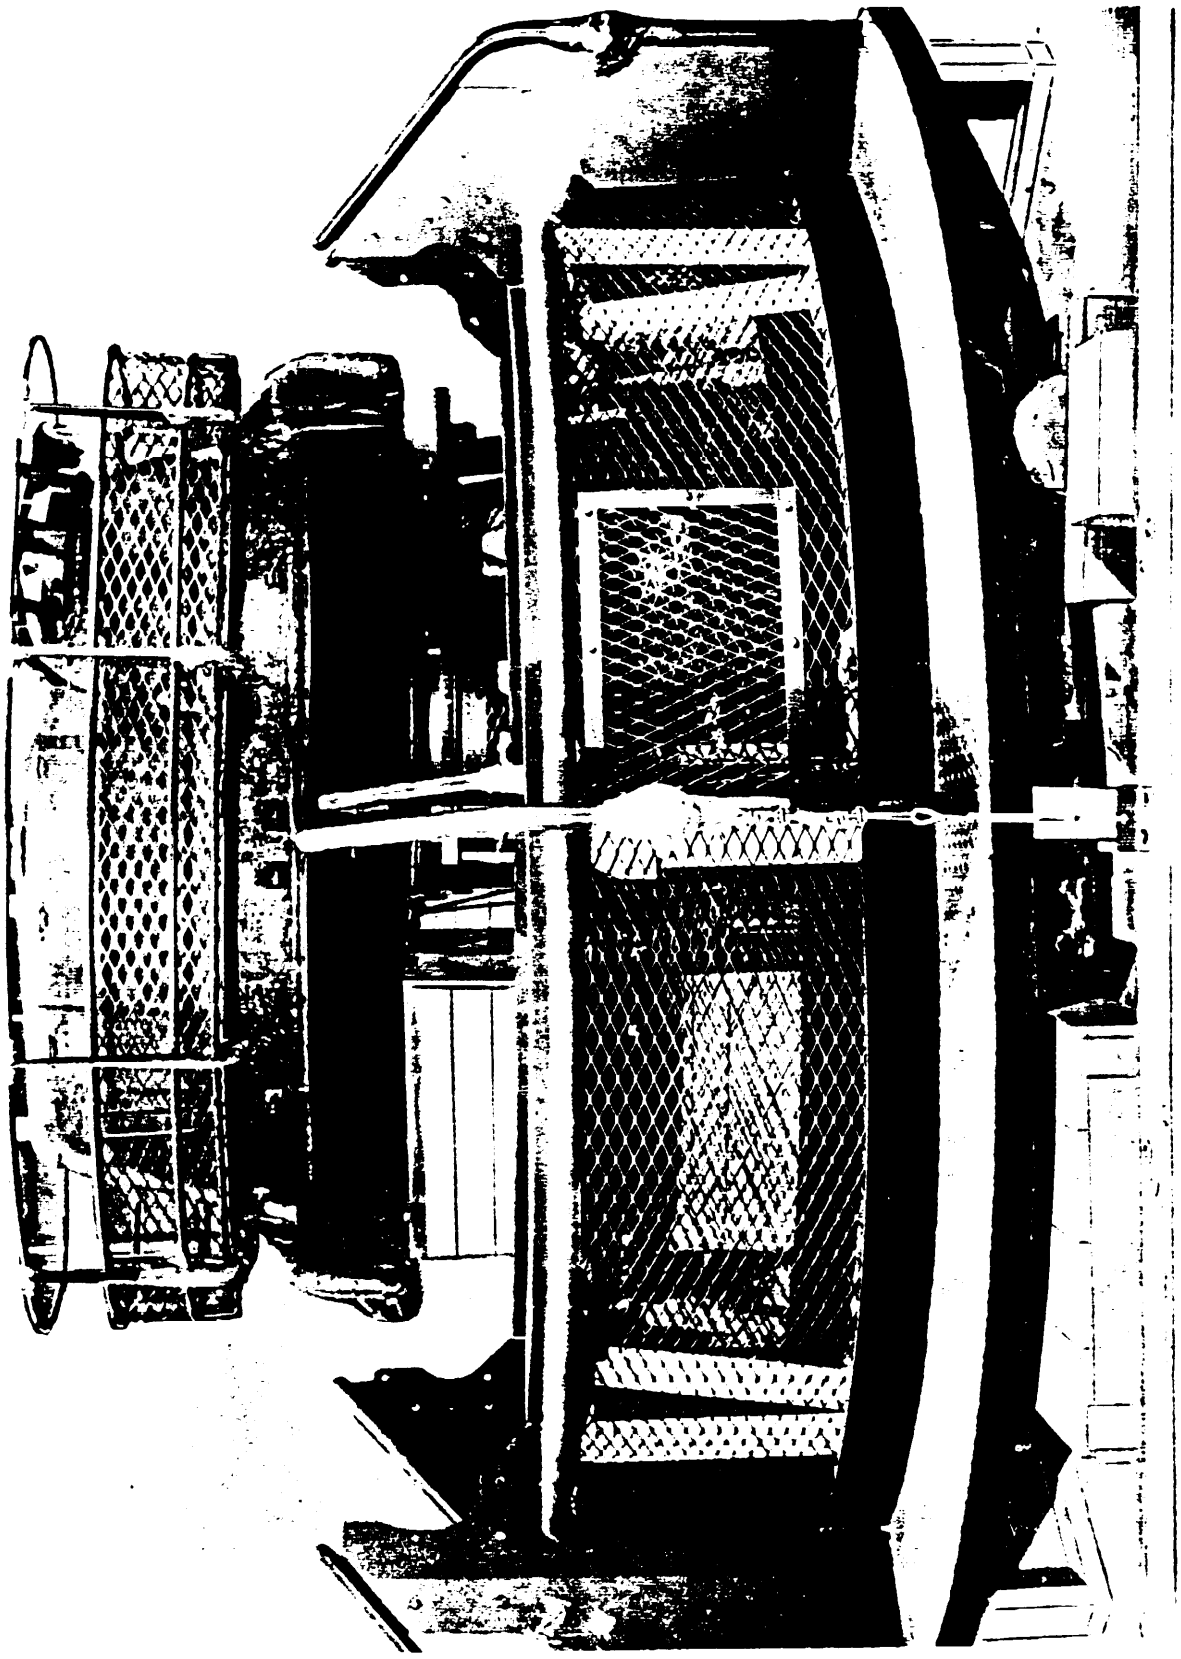

M30A1 TRAINER MOUNTED ON SKID FOR LEVEL A & B SHIPMENT.

FIG 29


Source: https://assist.dla.mil -- Downloaded: 20260-22T03:23Z
Check the source to verify that this is the current version before use.

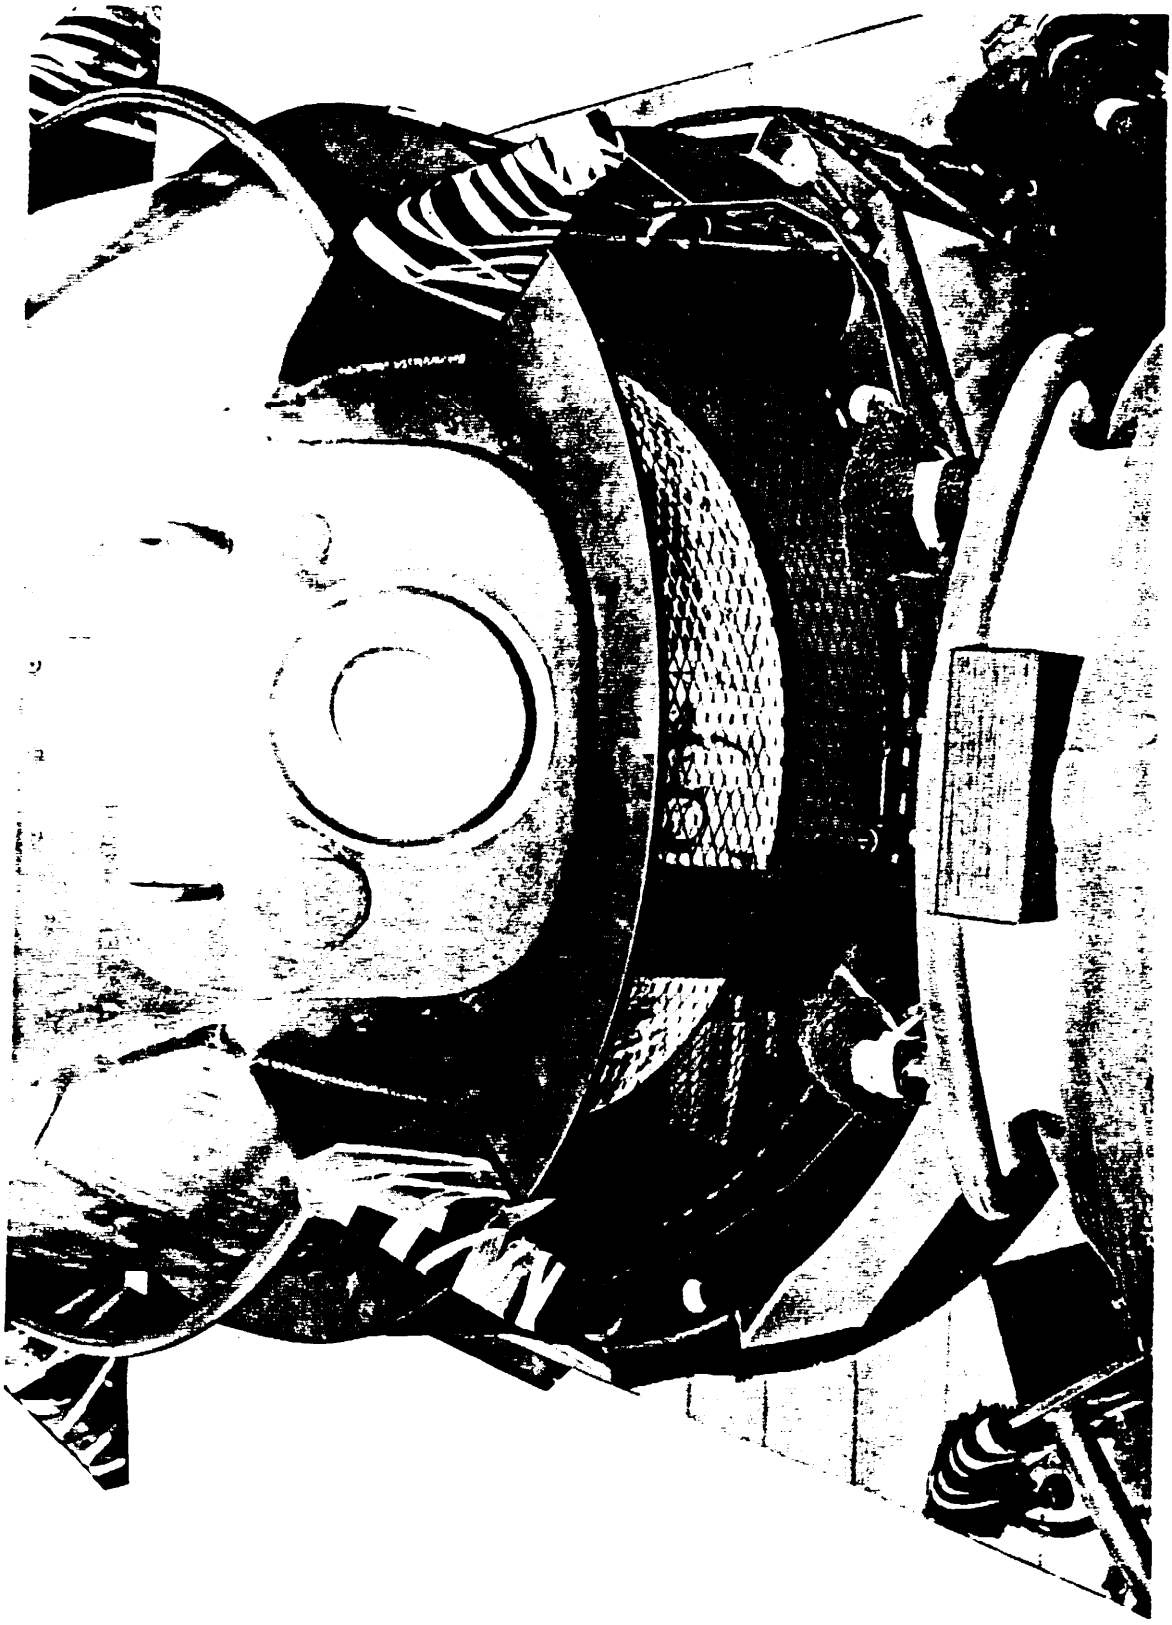

M30A1 TURRET GUN MOUNT BLOCKING IN PLACE BETWEEN MANTLET AND TURRET.
ALSO NOTE SEALING AND CUSHIONING IN PLACE.

FIG 30


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

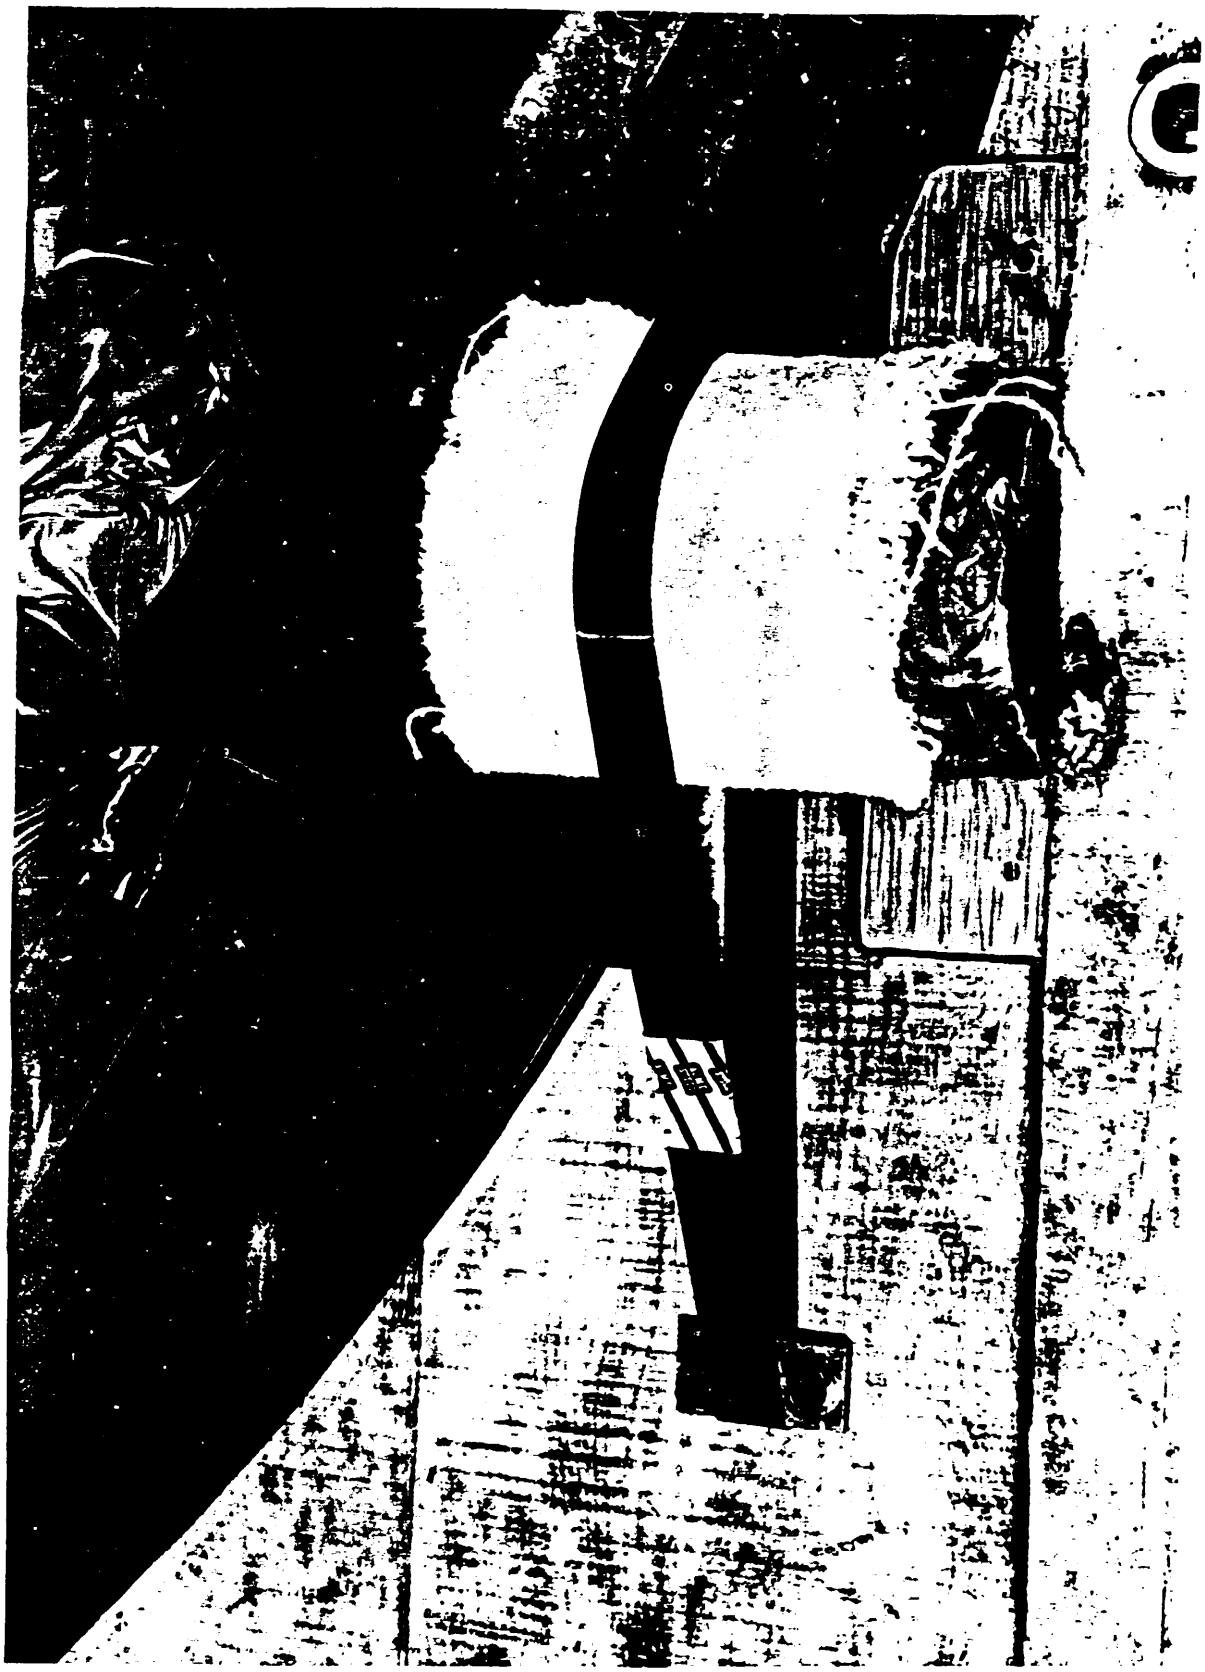

TURRET TRAINER GUN TUBE SEALED, CUSHIONED, BLOCKED AND STRAPPED IN PLACE ON SKID.

FIG 31


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

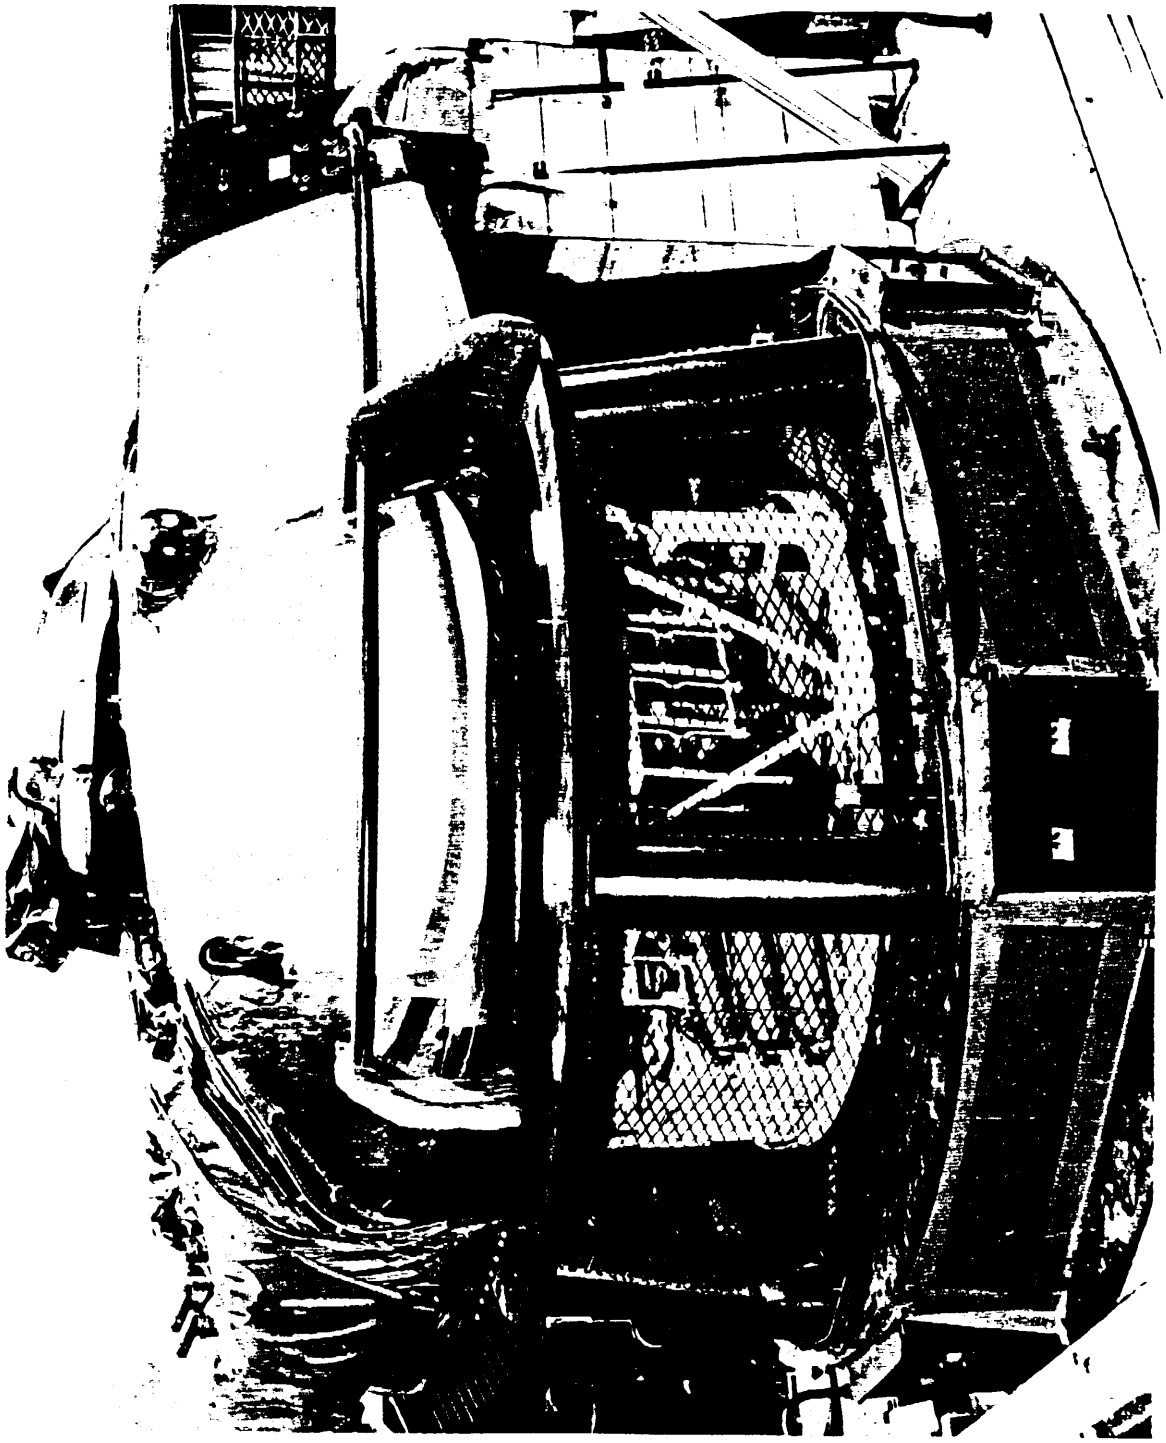

TRAINER SHOWING BOTTOM OPENINGS CLOSED. NOTE TURRET OPENINGS HAVE ALSO BEEN CLOSED.

FIG 32


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

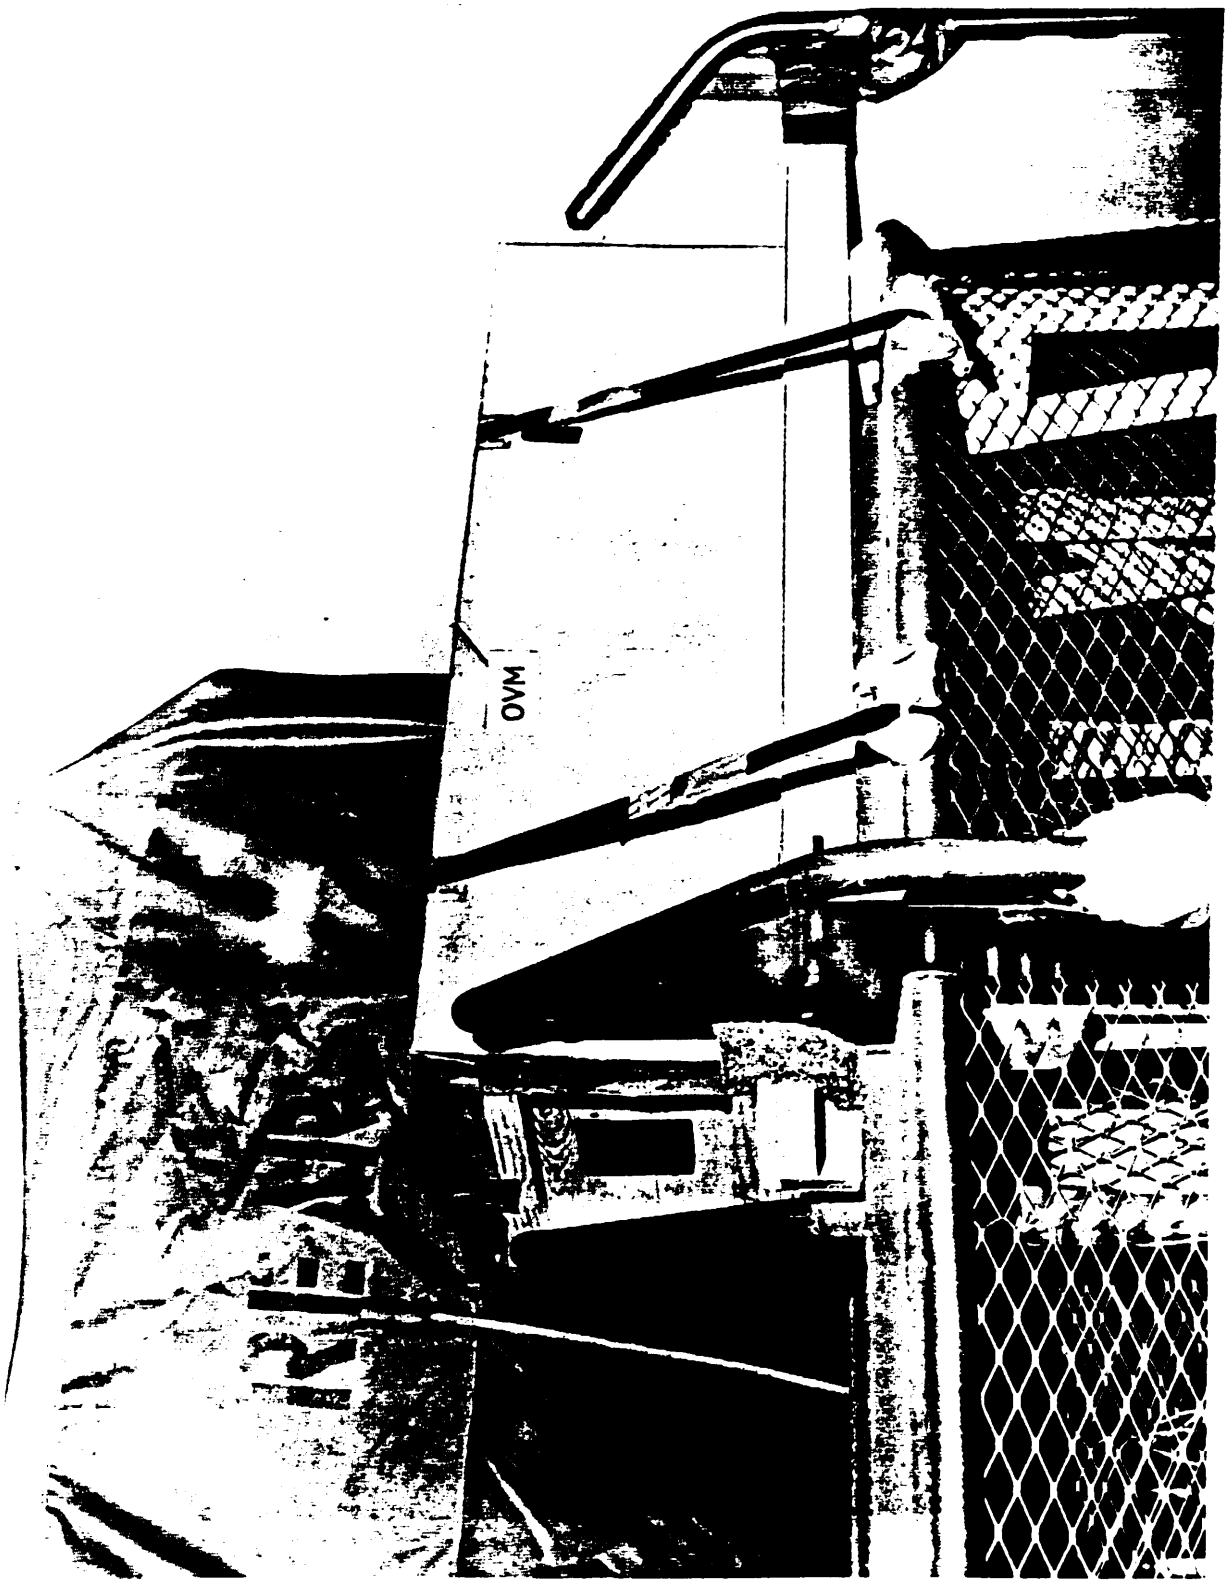

M30A1 TRAINER SHOWING OBSERVER PLATFORMS AND OVM BOX SECURED IN PLACE.

FIG 33


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

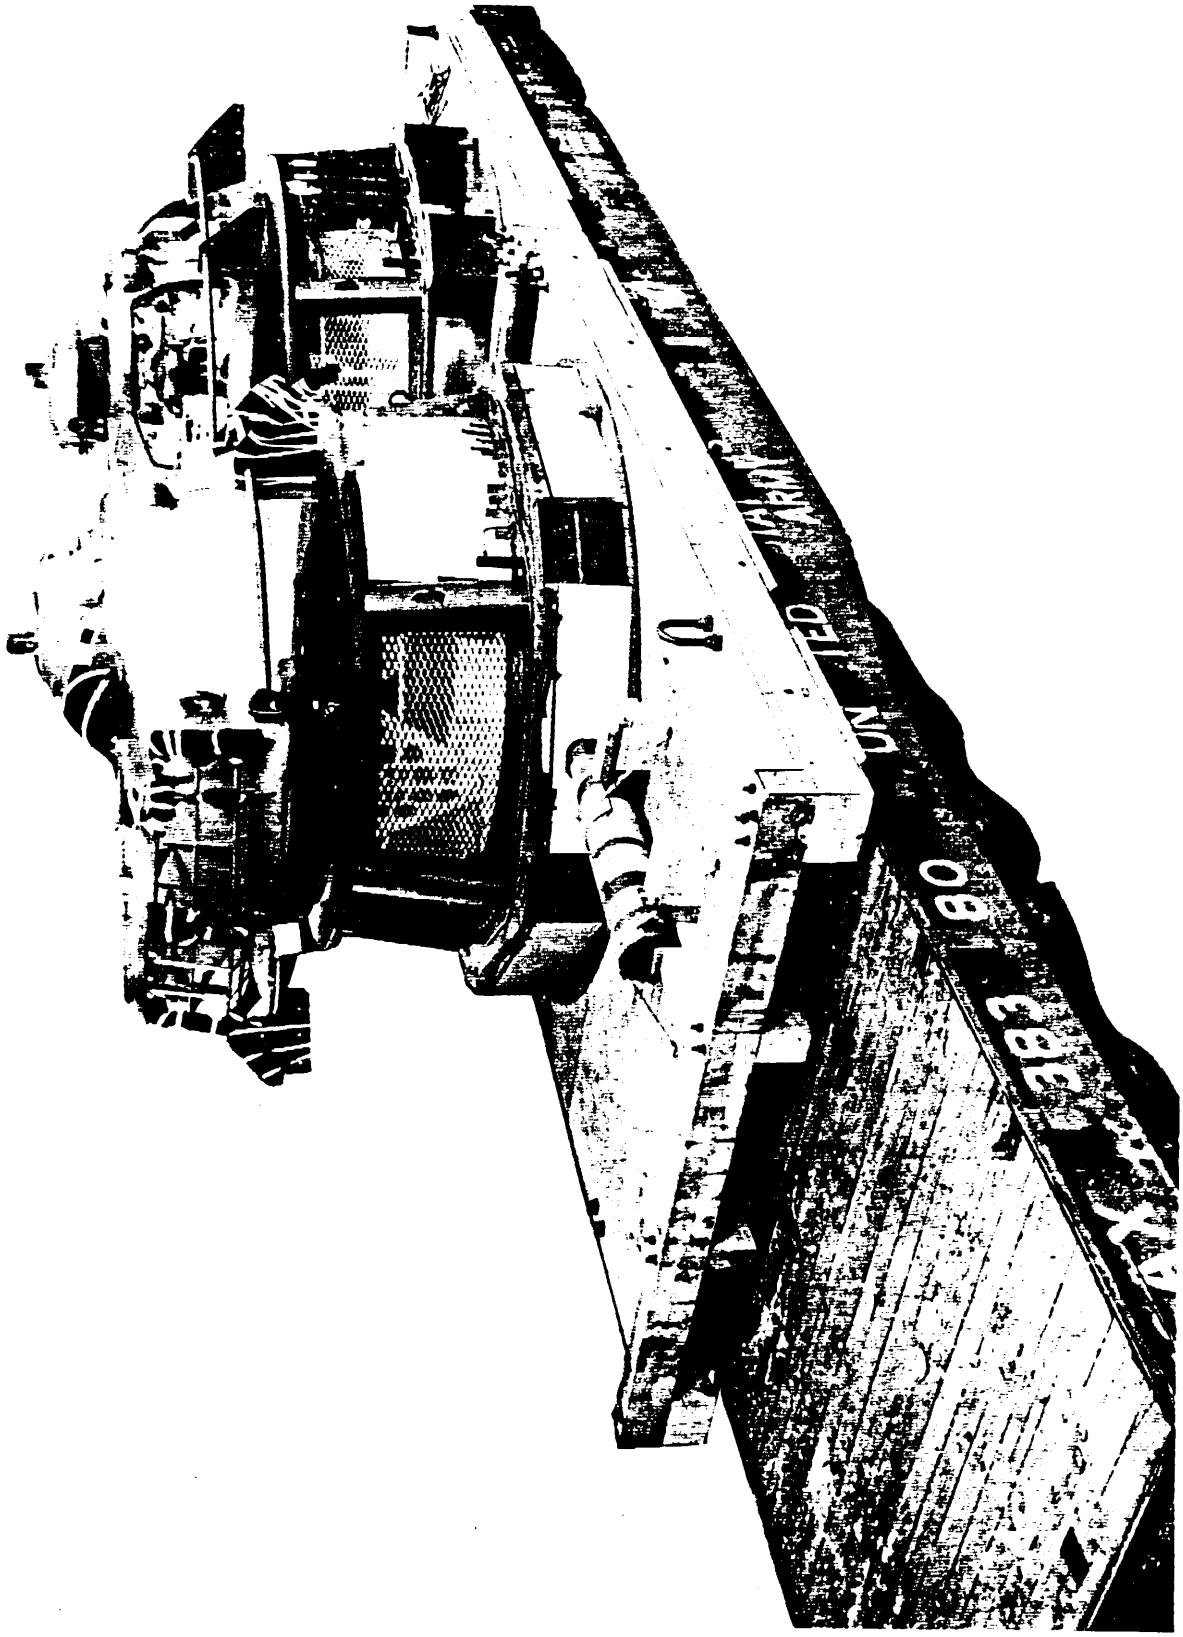

M26 TRAINER SHOWING BOTTOM OPENINGS AND TURRET OPENINGS CLOSED. ALSO ONE OF THE SCREENED OPENINGS IS CLOSED. ALL THE SCREENED AREA WILL BE CLOSED. ALSO NOTE CUSHIONING IN PLACE AND GUN TUBE BLOCKED AND SECURED.

FIG 34


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

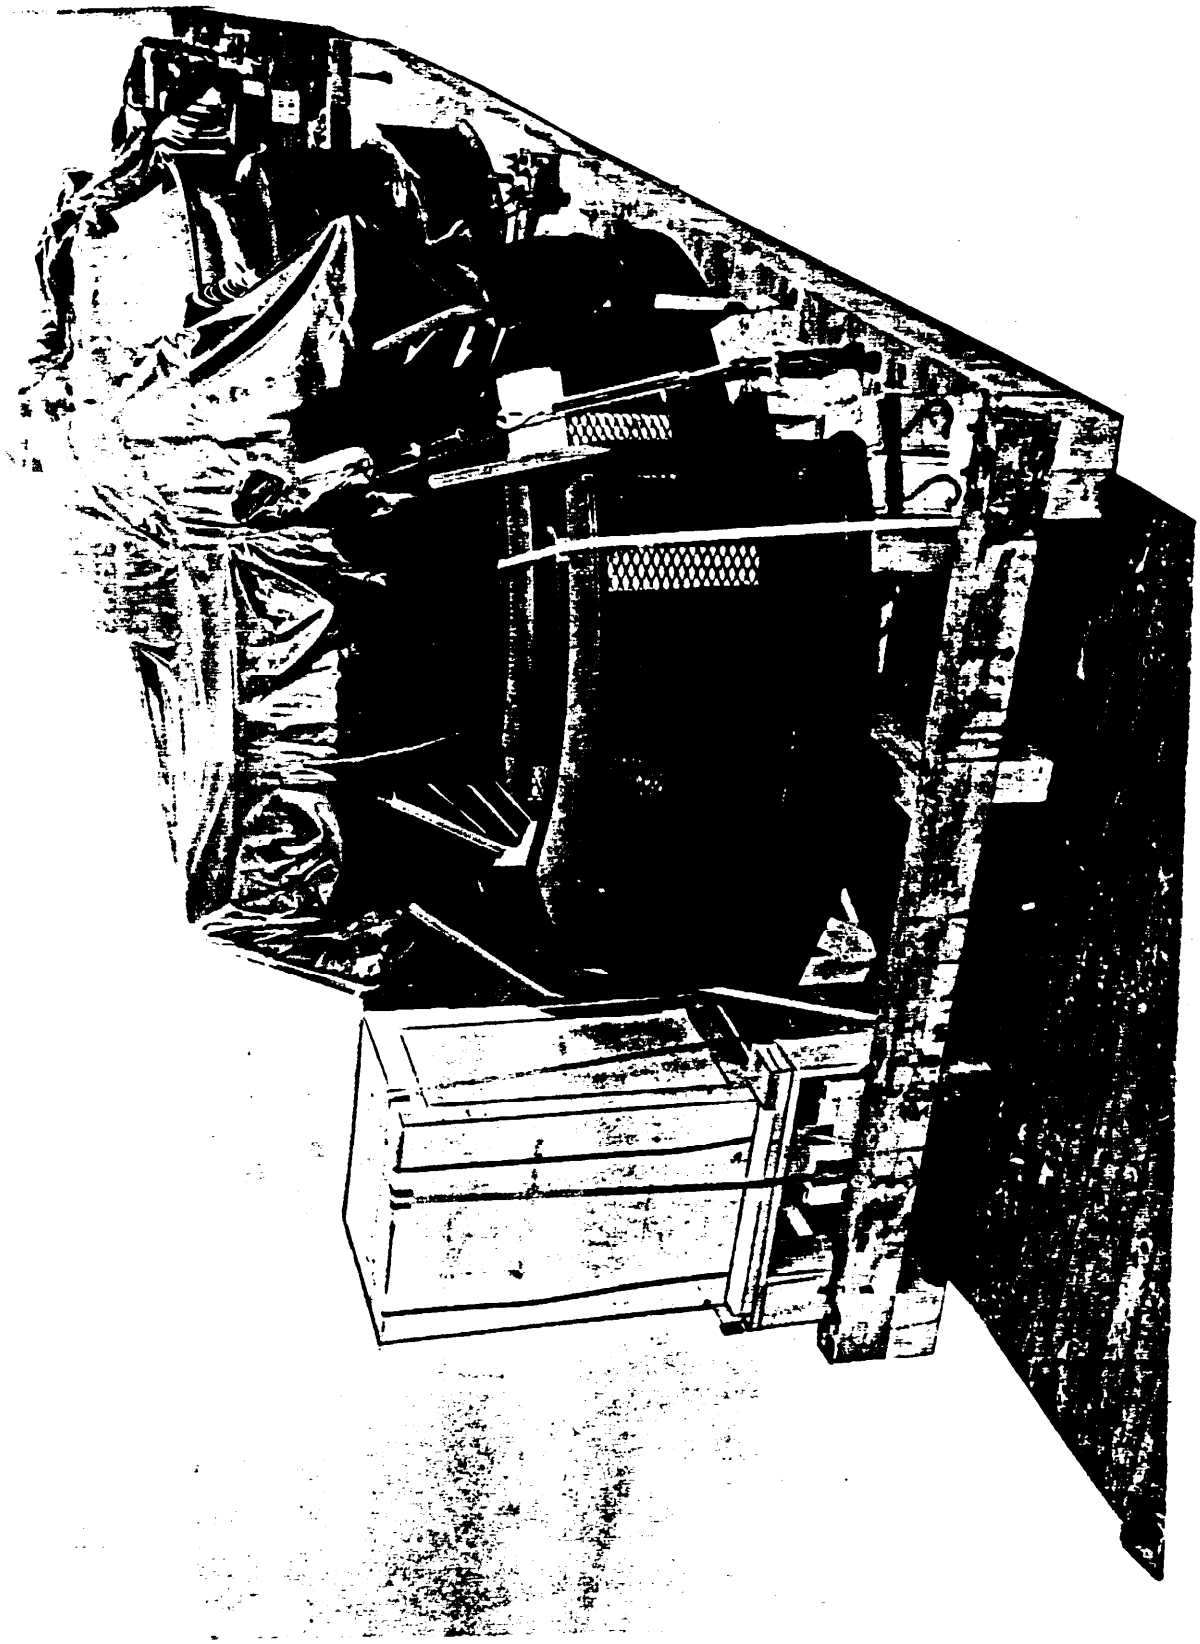

M26 TRAINER MOUNTED ON SKID AND READY FOR RAILROAD CAR LOADING. NOTE RECTIFIER CONTAINER ON LEFT FRONT OF SKID.

FIG 35


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

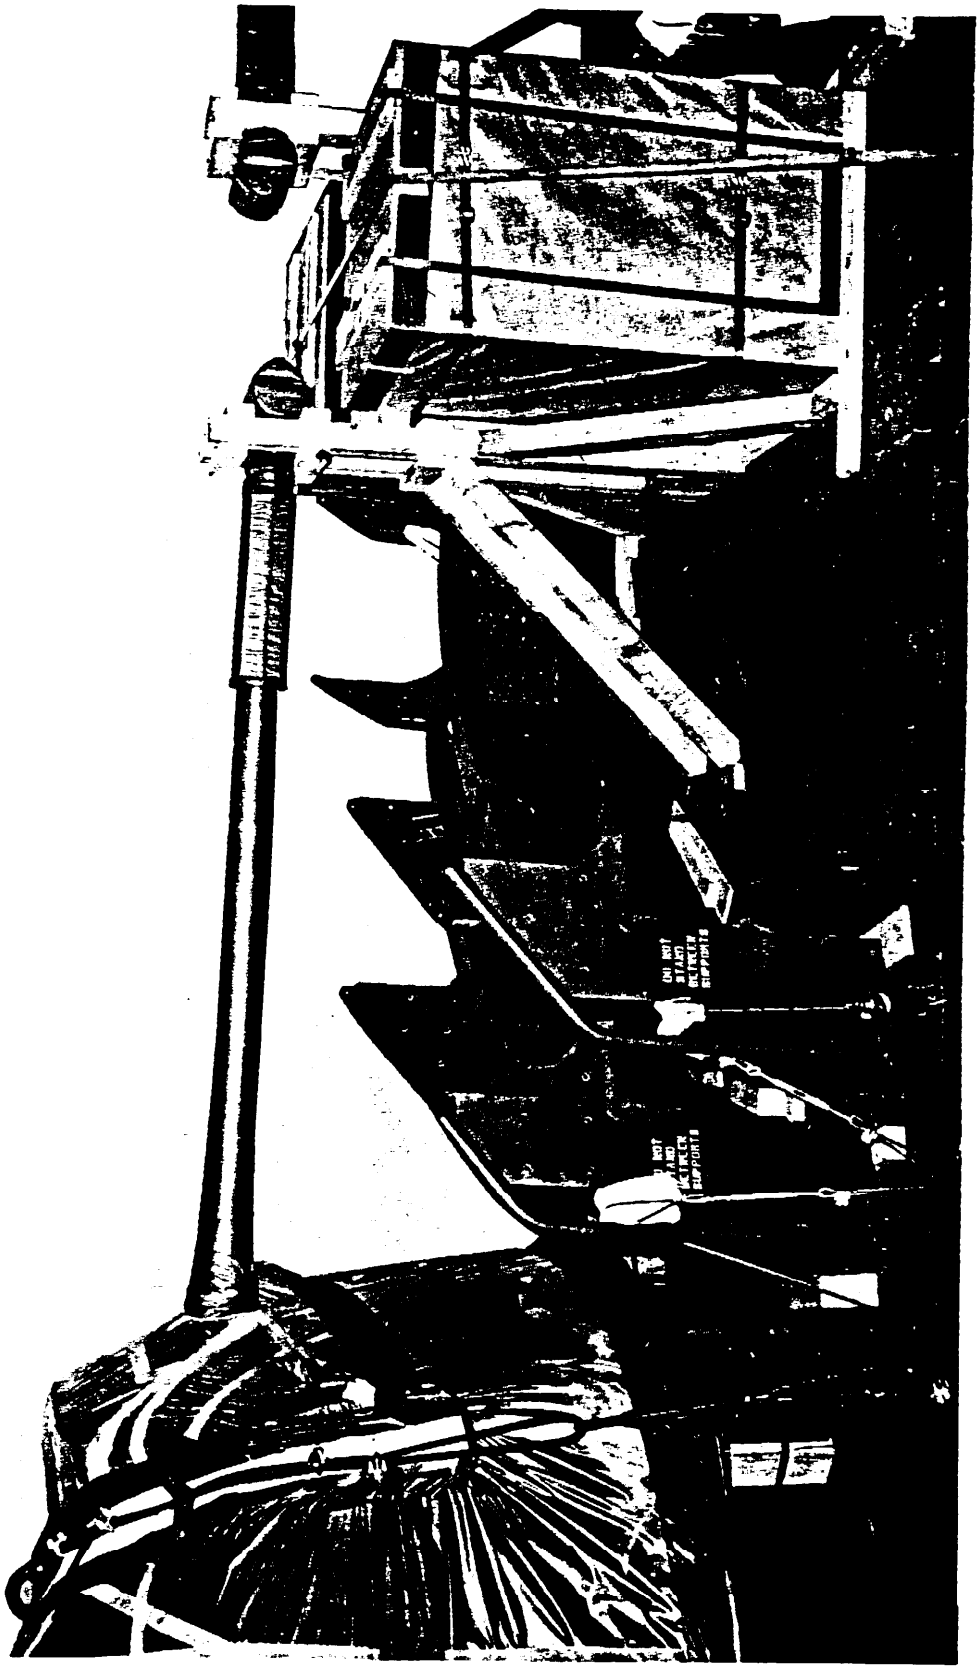

TWO TURRET GUNNERY TRAINERS, FOUR OBSERVER PLATFORMS AND TWO BOXED RECTIFIERS ARE SECURED ON RAILROAD CAR FOR LEVEL C SHIPMENT. THE GUN TUBES AND RECTIFIER CONTAINERS ARE BLOCKED AND BRACED WITH NOMINAL 2 X 4 AND 4 X 4 LUMBER. THE VERTICAL AND ANGULAR MEMBERS ARE NOMINAL 4 X 4'S. ALL OTHER MEMBERS ARE NOMINAL 2 X 4'S. ALL MEMBERS ARE CUT TO FIT. (LEFT SIDE SHOWN)

FIG 36

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T03:23Z
Check the source to verify that this is the currentversion before use.

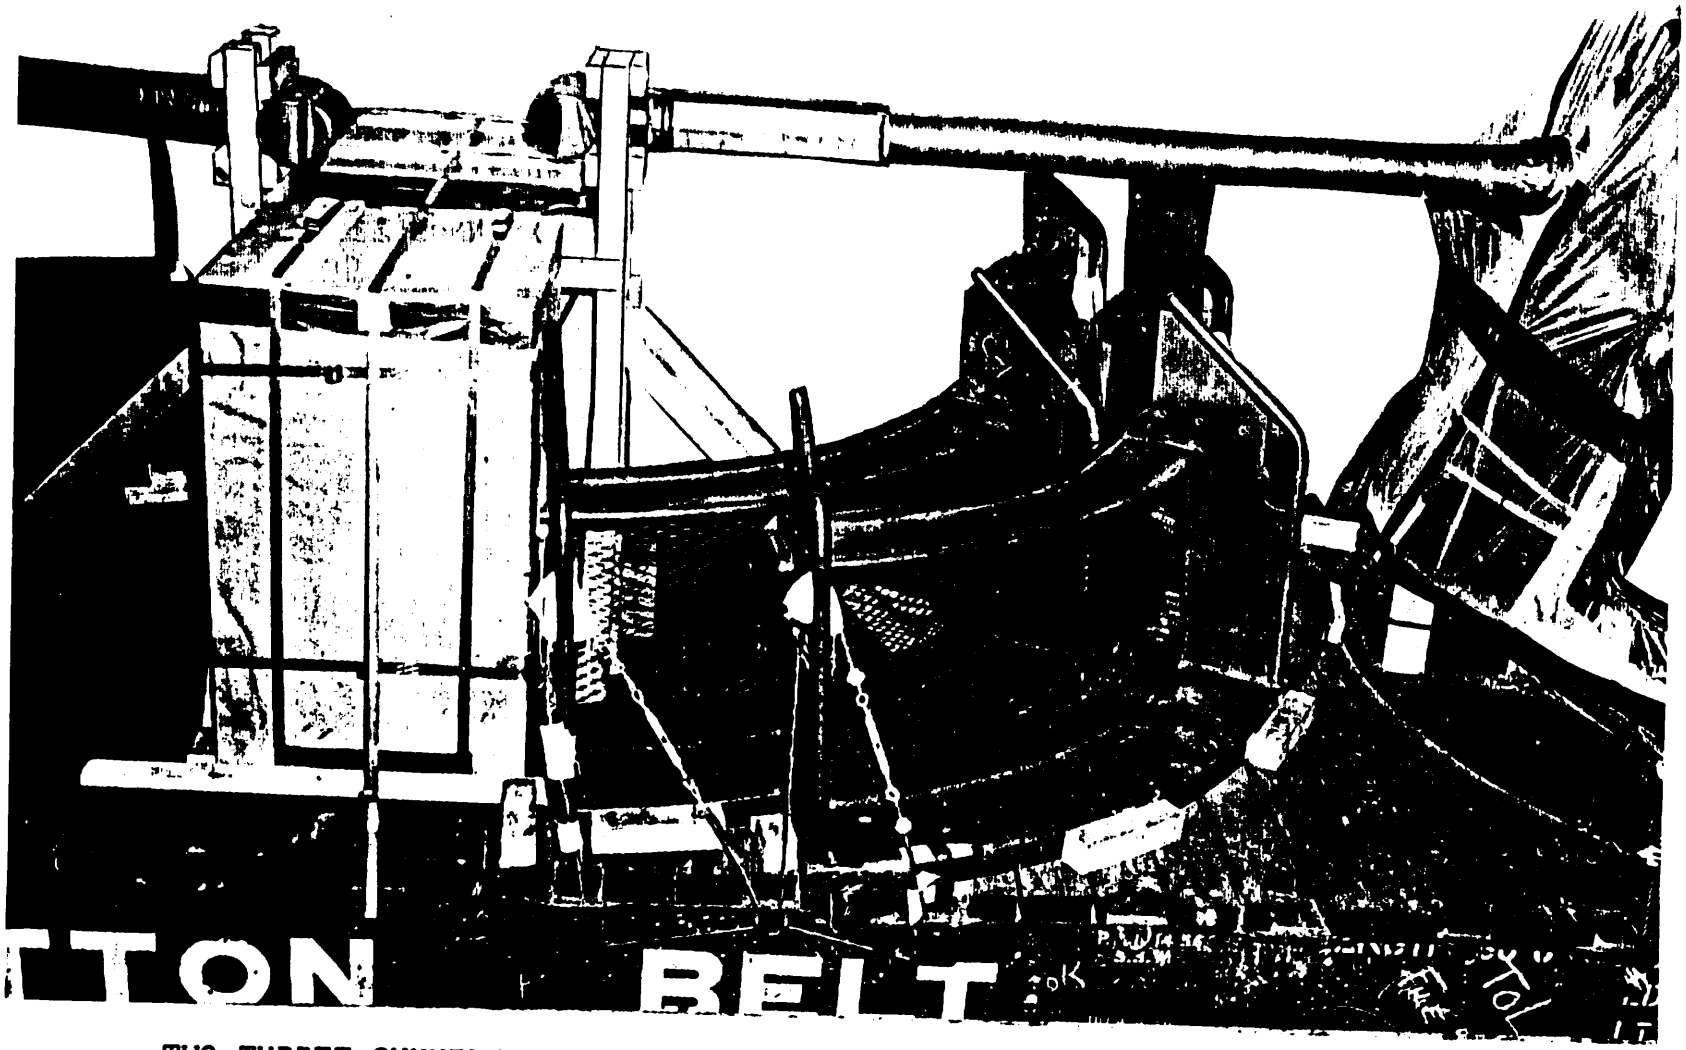

TWO TURRET GUNNERY TRAINERS, FOUR OBSERVER PLATFORMS AND TWO BOXED RECTIFIERS ARE SECURED ON RAILROAD CAR FOR LEVEL C SHIPMENT. THE GUN TUBES AND RECTIFIER CONTAINERS ARE BLOCKED AND BRACED WITH NOMINAL 2 X 4 AND 4 X 4 LUMBER. THE VERTICAL AND ANGULAR MEMBERS ARE NOMINAL 4 X 4'S. ALL OTHER MEMBERS ARE NOMINAL 2 X 4'S. ALL MEMBERS ARE CUT TO FIT. (RIGHT SIDE SHOWN)

FIG 37

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

COMMANDING GENERAL
US ARMY TANK-AUTOMOTIVE CENTER
WARREN, MICHIGAN 48090
SMOTA-RSS.1

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T03:23Z
Check the source to verify that this is the current version before use.