MILITARY SPECIFICATION

ROCKET MOTOR MARK 23 MODS 2 and 3

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and& available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the minimum requirements for the manufacture, test, and acceptance of Rocket Motor Mark 23 Mods 2 and 3 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Military

MIL-P-116	Preservation, Methods of
MIL-I-6868	Inspection Process, Magnetic Particle
MIL-I-85365	Igniter Mk 296 Mods (Loaded Assembly)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Air Engineering Center, Engineering Specifications and Standards Department (ESSD) Code 93, Lakehurst, NJ 08733, by using the self-addressed Standardized Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-248	Qualification Tests for Welders (Other than Aircraft Weldments)
MIL-STD-453	Inspection, Radiographic
MIL-STD-810	Environmental Test Methods for Aerospace and Ground Equipment
MIL-STD-1595	Aerospace Welder Performance Qualification

DRAWINGS

Naval Air Systems Command (Code Ident 30003)

DL 1255AS100	Rocket Motor Mark 23 Mod 2 (Loaded)
DL 1255AS114	igniter Mark 296 Mod 0 Loaded Assembly
DL 1255AS200	Rocket Motor Mark 23 Mod 3 (Loaded)
1255AS102	Grain, Propellant

PUBLICATIONS

Naval Ordnance Systems Command (Code Ident 10001)

OD 14483	Hydrostatic Proof Test Procedure, Nozzle and Body, Rocket Motor, Mark 23 Mods 0 & 1

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents forma part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

Code of Federal Regulations

49 CFR 100-199	Transportation

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

(Copies are available from the Superintendent of Documents, Government Printing Office, Washington, D. C. 20402. Orders for the above publications should cite "the latest issue and supplements thereto.)

3. REQUIREMENTS

3.1 Conformance to drawings. Rocket Motor Mark 23 Mods 2 and 3 shall meet all the reqirements of this specification and the requirements specified on the drawings listed on DL 1255AS1OO or DL 1255AS200.

3.1.1 Materials. Unless otherwise specified, all materials and parts used in the loaded rocket motor shall conform strictly to the detailed requirements specified on the drawings, specifications, and other documents listed on DL 1255AS1OO and DL 1255AS200 as applicable.

3.1.2 Finish. All components shall be free from burrs and contamination which could result in malfunction of the equipment or be a safety hazard in handling.

3.1.3 Dimensions. Unless otherwise specified In the contract, all dimensions are to apply after all manufacturing processes, surface treatments, and testing have been completed.

3.2 First article. When specified (see 6.2), the contractor shall furnish sample units for first article inspection and approval (see 4.4 and 6.4).

3.3 Components.

3.3.1 Motor. The rocket motor shall consist of all components shown on the drawings listed on DL 1255AS1OO or DL 1255AS200.

3.3.2 Igniters. Igniters used on this rocket motor shall conform to all requirements of MIL-I-85365 and DL 1255AS114.

3.3.3 Chambers. The rocket motor chambers shall conform to all . requirements of drawings listed on DL 1255AS1OO or DL 1255AS200,

3.3.4 Propellant grain. Size and configuration of the solid propellant grain shall be in accordance with 1255AS102.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

3.4 Rocket motor characteristics.

3.4.1 Visual inspection. The rocket motor and components shall be free from visible defects (See 4.6.1.)

3.4.2 Welding. All welding shall be in accordance with the procedures specified in the applicable weldment drawings. Melding shall be performed only by workmen qualified and certified in accordance with MIL-STD-1595 and MIL-STD-248.

3.4.3 Magnetic particle inspection. All ferromagnetic parts of the rocket motor shall be inspected. Indicated discontinuities shall be cause for rejection as specified on the applicable drawing (See 4.6.2).

3.4.4 Radiographic inspection. Propellant grains shall be radiographically inspected. Deficiencies such as cracks or voids shall be cause for rejection as specified on the applicable drawings (See 4.6.3).

3.4.5 Nozzle and body hydrostatic proof test. All rocket motor nozzles and chambers shall be hydrostatically proof tested. The requirements of OD 14483 shall be met (See 4.6.4).

3.5 Environment.

3.5.1 Thermal shock. The rocket motors shall withstand thermal shock (See 4.7.2).

3.5.2 Vibration. The rocket motors shall withstand simulated vibration (See 4.7.3).

3.5.3 Rain, humidity, and salt fog. The rocket motors shall withstand rain, humidity, and salt conditions (See 4.7.4).

3.5.4 Acceleration. The rocket motors shall withstand acceleration conditions **(See 4.7.5).**

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

3.6 Ballistic requirements. All rocket motors subjected to static firing shall meet the ballistic requirements specified in table I (See 4.8.2).

TABLE I. Ballistic requirements.

Requirements	0°F		+140°F	
	Min	Max	Min	Max
Avg. thrust duration (sec)	2.013	2.653	1.673	2.113
Avg. thrust (lb)	10,000	12,200	12,700	15,150
Avg. total impulse (lb-sec)	25,000	26,250	25,800	26,500
Ignition Interval (sec)	-	0.30	-	0.30

3.7 Assembly. The rocket motors shall be assembled as specified on the drawings listed on DL 1255AS100 or DL 1255AS200.

3.8 Total weight. The total weight of the loaded rocket motor shall not exceed 250 pounds.

3.9 Identification. Parts, components and assemblies shall be marked for identification in accordance with the applicable drawings.

3.10 Data Cards. Data cards, in accordance with figure 1, shall be completed for each production lot of rocket motors. These cards shall be forwarded to the appropriate government activities as directed by the procuring activity. (See 6.2.1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

DATA CARD

LOADED ROCKET MOTORS, MARK 23 MODS 2 AND 3
NAVAIR DRAWING DL 1255AS1OO and DL 1255AS200

PREPRODUCTION/PRODUCTION LOT NUMBER _____

QUANTITY IN LOT _____ NAME OF MANUFACTURER _____

CONTRACT NUMBER _____ ROCKET MOTOR WEIGHT _____

PROPELLANT LOT PRODUCTION _____
(DATE)

PRIMARY COMPONENTS: 1. ROCKET MOTOR
2. PROPELLANT GRAIN

PART NO.

MFG. _____ LOT NO. _____ DATE (MO. & YR.) _____

MOTOR SERIAL NO. _____

Remarks: (Enter a description of each waiver, deviation, or both related to the lot represented with reference to the authorization for the waiver or deviation.)

FIGURE 1. Sample data card.

3.11 Workmanship. Workmanship shall be of sufficiently high quality to ensure satisfactory performance, safety, and reliability consistent with the intended use of the rocket motor.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of Inspections. The Inspection requirements specified herein are classified as follows:

a. First article inspection (See 4.4)
b. Quality conformance inspection (See 4.5)

4.3 Inspection conditions. Unless otherwise specified (See 6.2), all inspections shall be performed under the following conditions:

a. Temperature: Room ambient 18 to 35°C (65 to 95°F)
b. Altitude: Normal ground
c, Vibration: No requirement
d. Humidity: Room ambient to 95 percent relative, maximum

4.4 First article inspection. First article inspection shall be performed by the contractor, after award of contract and prior to production, at a location acceptable to the Government. First article inspection shall be performed on sample units which have been produced with equipment and procedures normally used in production. First article approval is valid only on the contract under which it is granted, unless extended by the Government to other contracts.

4.4.1 Sample size. Ten rocket motors shall be subjected to first article inspection.

4.4.2 Inspection routine. The sample shall be subjected to the tests of table II. For destructive tests the schedule of table III shall be followed.

4.4.3 Failures. Failure of any rocket motor shall be cause for refusal to grant first article approval.

4.5 Quality conformance inspection. Quality conformance inspection shall consist of the tests and inspections listed in table IV.

4.5.1 Lot. A production lot of loaded rocket motor assemblies shall consist of units loaded from the same propellant grain lot and submitted for inspection and test at the same time. The number of grains per lot shall not exceed 40.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE II. First article tests.

Inspection or test	Requirement	Test
Visual inspection	3.4.1	4.6.1
Welding	3.4.2	
Magnetic particle inspection	3.4.3	4.6.2
Radiographic inspection	3.4.4 and 3.7	4.6.3
Nozzle and body hydrostatic proof test	3.4.5	4.6.4
Thermal shock	3.5.1	4.7.2
Vibration	3.5.2	4.7.3
Rain, humidity, and salt fog	3.5.3	4.7.4
Acceleration	3.5,4	4.7.5
Ballistic test	3.6	4.8

TABLE III. First article destructive test schedule.

Sequence	Tests	1	2	3	4	5	6	7	8	9	10	Test Para.
		Conditioning temperature (°F)										
		0	140	0	140	0	140	0	140	0	140	
1	X-ray	X	X	X	X	X	X	X	X	X	X	
2	Thermal shock	X	X	X	X	X	X	X	X			4.7.2
3	Vibration	X	X	X	X							4.7.3
4	X-ray	X	X	X	X							
5	Rain, humidity & salt fog	X	X									4.7.4
6	Acceleration					X	X					4.7.5
7	X-ray					X	X					
8	Static firing	X	X	X	X	X	X	X	X	X	X	4.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

TABLE IV. Quality conformance inspection.

Inspection or test	Requirement	Test
Visual inspection	3.4.1	4.6.1
Welding	3.4.2	-
Finish	3.4.3	-
Corrosion protection	3.4.4	-
Magnetic particle inspection	3.4.5	4.6.2
Radiographic inspection	3.4.6	4.6.3
Nozzle and body hydrostatic proof test	3.4.7	4.6.4
Ballistics test	3.6	4.8

4,5.2 Sample size.

4.5.2.1 Nondestructive inspection and tests. Unless otherwise specified in the contract, sampling for nondestructive inspections and tests shall be in accordance with MIL-STD-105, level II, AQL 1.0.

4.5.2.2 Destructive tests. Two motors selected at random for quality conformance test firings shall be selected from the same motor lot. The motors shall be static fired after being temperature conditioned at O°F and 140°F, respectively, for a minimum of 40 hours in accordance with 4.7.1. If chamber pressure is to be obtained from test firings, propellant grains may be randomly selected from the grain lot and test fired in special test hardware provided such hardware has been previously approved by the procuring activity.

4.6 Nondestructive inspection and tests.

4.6.1 Visual inspection. All rocket motors and components shall be free from dents, scratches, split or cracked components, poor quality welds, chipping or flaking of-plated or painted surfaces, sharp edges or other defects or discontinuities as specified on the applicable drawings.

4.6.2 Magnetic particle inspection. All ferromagnetic parts shall - be inspected in accordance with MIL-I-6868 after hydrotest.

4.6.3 Radiographic inspection. Propellant grains and rocket motors shall be subjected to a radiographic inspection in accordance with MIL-STD-453.

4.6.4 Nozzle and body hydrostatic proof test. All rocket motor nozzles and chambers shall be subjected to a hydrostatic proof test in accordance with OD 14483 except that graphite nozzle inserts shall be protected from contact with pressurizing liquid.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

4,7 Environmental conditioning and tests.

4.7.1 Temperature conditioning. Sample rocket motors shall be subjected to the applicable conditioning temperature for a minimum period of 40 hours. The igniter assembly shall be removed from the rocket motor and replaced with the shipping plug during conditioning. The igniter assembly shall be subjected to the identical temperature conditioning as the rocket motors.

4.7.1.1 Preproduction temperature conditioning. Preproduction rocket motors to be subjected to static firing shall be conditioned at the temperatures specified in table III.

4.7.1,2 Production temperature conditioning, Production rocket motors to be subjected to static firing shall be conditioned at the following temperatures:

a. Sample 1: 0°F ± 5°F
b. Sample 2: 140°F ± 5°F

4.7.2 Thermal shock. The rocket motors as specified in table III shall undergo thermal shock testing in accordance with MIL-STD-81O, Method 503.1 with the following changes:

a. Conditioning temperatures shall be O°F (-18°C) and + 140°F (+60°C).
b. Motors shall be maintained at the specified temperature for 4 hours.

4.7.3 Vibration. The rocket motors as specified in table III shall be vibrated in accordance with MIL-STD-810, Method 514.2, Equipment Class 4, Mounting-A, Figure 514.3, Curve C.

4.7.4 Rain, humidity, and salt fog. Temperature conditioned rocket motors, with the igniter assembly installed, shall be tested for resistance to rain, humidity, and salt fog in accordance with MIL-STD-81O, Methods 506.1, 507.1, and 509.1, respectively, as specified in table II.

4.7.5 Acceleration test. Temperature conditioned rocket motors shall be acceleration tested in accordance with MIL-STD-81O, Method 513.2, Procedure 1, with the following changes (See table III):

a. Aft longitudinal acceleration: 30 g's
b. Lateral acceleration: 12 g’s

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

c. No forward longitudinal acceleration
d. Igniter Mk 296 shall not be installed during testing.

4.8 Ballistic tests.

4.8.1 Ballistic requirements. Rocket motors shall meet the ballistic requirements as specified in table I when static fired in accordance with 4.8.2.

4.8.2 Static firing.

4.8.2.1 Test equipment required. A suitable dual channel test stand, equipped with a recording oscillograph, and instrumentation for measuring thrust and time, shall be used for firing the rocket motors.

4.8.2.2 Temperature conditioning. All rocket motors to be subjected to static firing shall be conditioned in accordance with 4.7.1.

4.8.2.3 Oscillograph record. An oscillograph record of the thrust developed by the rocket motor unit shall be obtained during the firing test.

4.8.2.4 Firing. The rocket motor shall be mounted on the test stand specified in 4.8.2.1 and fired not later than 30 minutes after removal from the temperature conditioning box. Units shall be fired by energizing the igniter circuit with 28 volts direct current at 13 ± 2 amperes.

4.9 Ballistic performance. Acceptable ballistic performance shall be determined by comparison of ballistic requirements of table I with the values of the test data obtained from the rocket motor static test firing. The data may be taken from the actual oscillograph record or by digital data processing techniques, provided that such techniques have prior approval of procuring activity. (See 6.5)

5. PACKAGING

5.1 Preservation and packaging.

5.1.1 Level A. In addition to the following, Level A Packaging shall be in accordance with the Code of Federal Regulations 49 CFR 171-190.

5.1.2 Unit packaging. Rocket motors shall be unit packaged for shipment in a nonpropulsive state in accordance with MIL-P-116, Method III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

5.2 Packing.

5.2.1 Level A, Rocket motors packaged as specified in 5.1 shall be packed in accordance with the drawings listed on DL 1255AS1OO or DL 1255AS200.

5.3 Marking. In addition to any special marking required by the contract or order (See 6.2), unit packages and shipping containers shall be marked in accordance with MIL-STD-129. All information appearing on the rocket motor shall be stenciled or otherwise marked on the exterior of the rocket motor package.

6. NOTES

6.1 Intended use. The Rocket Motor is designed for use primarily as a high thrust, short duration power plant to impart initial acceleration to various types of drones and test sleds.

6.2 Ordering data.

6.2.1 Procurement requirements. Procurement documents should specify The following:

a. Title, number, and date of this specification

b. Mark and Mod designation of rocket motor

c. If first article is required, and, if so, location of facility designated to evaluate the samples

d. Disposition of completed data card and first article inspection and test report

e. Lot size

f. That the safety precaution requirements of the "Contractors' Safety Manual for Ammunition, Explosives, and Related Dangerous Material," DOD 4145.26M, are applicable. NOTE: When this specification is used as part of the description of work to be accomplished by a Government activity, the safety precaution requirements of "Ammunition and Explosives Ashore," OP 5, are applicable.

g. Marking if other than as specified (See 5.3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

6.2.2 Contract data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invoices the provisions of 7-104.9(n) of the Defense Acquisition Regulations, the data requirements identified below will be developed as specified by an approved Data Item Description (DID) (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (DD Form 1423) incorporated into the contract, When the provisions of DAR-7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable data required by this specification is cited in the following paragraph:

PARAGRAPH	DATA REQUIREMENTS	APPLICABLE DID
4.5.2.2	Test chamber drawing	DI E 5325

(Copies of data i tern description (DID) required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

6.3 Definitions.

6.3.1 Thrust-time curve for rocket motor, Mark 23 Mods 2 and 3. (See figure 2.)

6.3.1.1 Thrust duration. Thrust duration shall be measured on the time axis from the point at which the tangent to the initial rise of the curve crosses the zero thrust line to the point at which the tangent to the final decline of the curve crosses the zero thrust line,

6.3.1.2 Total impulse. The area under the thrust-line curve within the limits specified in 6.3.1.1 shall be taken as the total impulse.

6.3.1.3 Average thrust. The ratio of the total impulse to the thrust duration shall be taken as the average thrust.

6.3.1.4 Ignition interval. The elapsed time from the closing of the firing circuit to the point where the tangent to the initial rise of the thrust curve intersects the zero thrust line shall be taken as the ignition interval.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

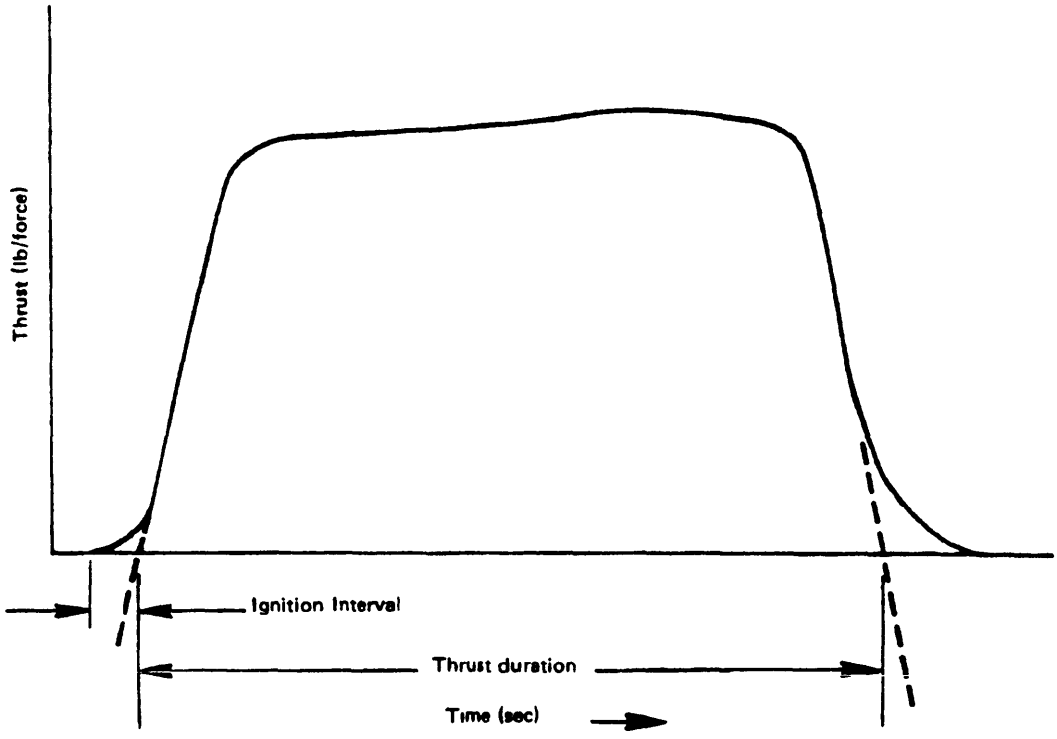


FIGURE 2. Sample thrust-time curve rocket motor, Mark 23 Mods.

6.4 First article. When a first article is required, it shall be tested and approved under the appropriate Provisions of 7-104.55 of the Defense Acquisition Regulation- The first-article should consist of 10 unit(s). The contracting officer should Include specific instructions in all procurement instruments, regarding arrangements for examinations, test and approval of the first article.

6.5 Data techniques. If contractor intends to use optional digital data processing techniques he should include a description of these techniques in his technical proposal.

Preparing activity:
Navy - AS

(Project 1340-N593)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Naval Air Engineering Center
Engineering Specifications and Standards
Department (ESSD) Code 93
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-R-85363(AS), Rocket Motor Mark 23 Mods 2 and 3

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

MILITARY SPECIFICATION

ROCKET MOTOR, MARK 23 MODS 2 AND 3

This amendment forms a part of MIL-R-85363, dated 1 May 1981, and is approved for use within the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

PAGE 2

Under "DRAWINGS": Add "DL 1133AS100 Shipping Condition Rocket Motor, JATO, Mk 23 Mods, Without Igniter".

Under "PUBLICATIONS": Add "WR-53/808 Weapons Requirement, Palletizing Domestic Unit Load, Rocket Motors, JATO Mk 23 Mods" and "WR-53/866 Weapons Requirement, Palletizing Domestic Unit Load, Rocket Motor, JATO, Mk 23 Mods".

PAGE 3

Acid new paragraph as follows: ''3. 1.4 Corrosion protection. All parts and surfaces subject to corrosion shall be protected in accordance with the requirements specified on the drawings listed on DL 1255AS1OO or DL 1255AS200. "

PAGE 5

TABLE I: Delete and substitute new table as follows:

TABLE I. Ballistic requirements.

Requirements	0°F		140°F	
	Min	Max	Min	Max
Avg. thrust duration (sec)	2.013	2.653	1.673	2.113
Avg. thrust (lb)	10,000	12,200	12,700	15,150
Avg total impulse (lb-sec)	25,000	26,250	25,800	26,500
Ignition interval (sec)	—	0.30	—	0.30
Maximum thrust	—	16,500	—	16,500

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

PAGE 9

TABLE IV. Change requirement numbers as follows: from “3.4.3” to “3.1.2”, from “3.4.4” to “3.1 .4”, from “3.4.5” to “3.4.3”, from “3.4.6” to “3.4.4”, from “3.4.7” to “3.4.5”.

Add “4.5.2.3 Post-firing visual inspection. All fired hardware shall be visually inspected and shall be free of hot spots, blisters, and permanent deformation.

4.6.3, line 1: Delete “and rocket motors”.

PAGE 11

5.1.2, Add second sentence as follows: “Rocket motor shipping condition shall be in accordance with DL 1133AS1OO when specified (see 6.2.1).”

PAGE 12

5.2.1, line 2: Delete “the drawings listed on DL 1255AS100 or DL 1255AS200” and substitute “WR-53/808 or WR-53/866 as specified (see 6.2.1)”.

6.2.1: Add “h. Applicable packing and packaging documents (see 5.1.2 and 5.2. 1). ”

NOTE: “The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these nota-t ions. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment. ”

Preparing activity:
Navy-AS

(Project 1340-N71S

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:44Z
Check the source to verify that this is the current version before use.