MILITARY SPECIFICATION SHEET

ATTENUATOR, FIBER OPTIC, SHIPBOARD, FIXED, CONNECTORIZED, SINGLE-MODE, STAND-ALONE

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-A-24726.

CLASSIFICATION

Type: F (Fixed)
Port construction: C (Connectorized)
Package: S (Stand-alone).

MATERIALS

Metals: The metal components shall be corrosion resistant steel, nickel plated brass, plated beryllium copper, nickel plated zinc diecast alloy or tin plated copper.

CONSTRUCTION

Connectors: Plug - In accordance with MIL-C-83522/12.
Receptacle - In accordance with MIL-C-83522/13.

Mounting hardware: N/A

Enclosure: Watertight.

Seals: N/A.

Size: See figure 1.

Weight: ≤ 55 grams.

Color: Black.

AMSC N/A FSC 6006

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-20T01:23Z
Check the source to verify that this is the currentversion before use.

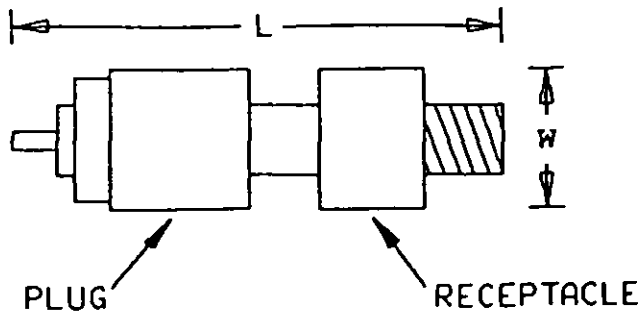

Overall length (L): 30 ± 2 mm.

Overall diameter (W): 8.5 ± 1 mm.

FIGURE 1. Fixed 10 dB attenuator.

PERFORMANCE REQUIREMENTS

Insertion loss: 10 ± 0.2 dB.

Temperature: Range 4.

PART IDENTIFYING NUMBER: D24726/01-001.

PART DESIGNATOR: FCS.

Review activities:
Navy - EC, YD

Preparing activity:
Navy - SH
(Project 6006-N001-01)

☆ U.S. GOVERNMENT PRINTING OFFICE: 1989 604-033/14103

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:23Z
Check the source to verify that this is the current version before use.