MILITARY SPECIFICATION SHEET

INTERCONNECTION BOX, FIBER OPTIC, SHIPBOARD SUBMERSIBLE, 30.5 X 43.2 CM (METRIC)

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-I-24728.

DESIGN AND CONSTRUCTION

Configuration and physical dimensions: See figure 1 and table I.
Degree of enclosure: Submersible, 4.3 meters.
Interconnection box mounting: See figures 2 and 3.
Cable-interconnection interface: See figure 1.

Interconnect organization:

Fiber optic splices: (mechanical and fusion), 288 maximum.
Fiber optic connectors: 84 maximum, see figure 4.
Fiber optic couplers: N/A.
Fiber and splice organizers: See figure 5.

Splice chart: See figure 6.

Weight: ≤ 40 lbs.

Size: 30.5 X 43.2 cm.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:26Z
Check the source to verify that this is the current version before use.

ENVIRONMENTAL PROPERTIES

Temperature range: 1 (Operating: minus 54 to plus 65°C,
Storage: minus 62 to plus 71°C).

PART OR IDENTIFYING NUMBER: D24728/02-001.

Review activities:
Navy - EC, YD

Preparing activity:
Navy - SH
(Project 6099-N001-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:26Z
Check the source to verify that this is the current version before use.

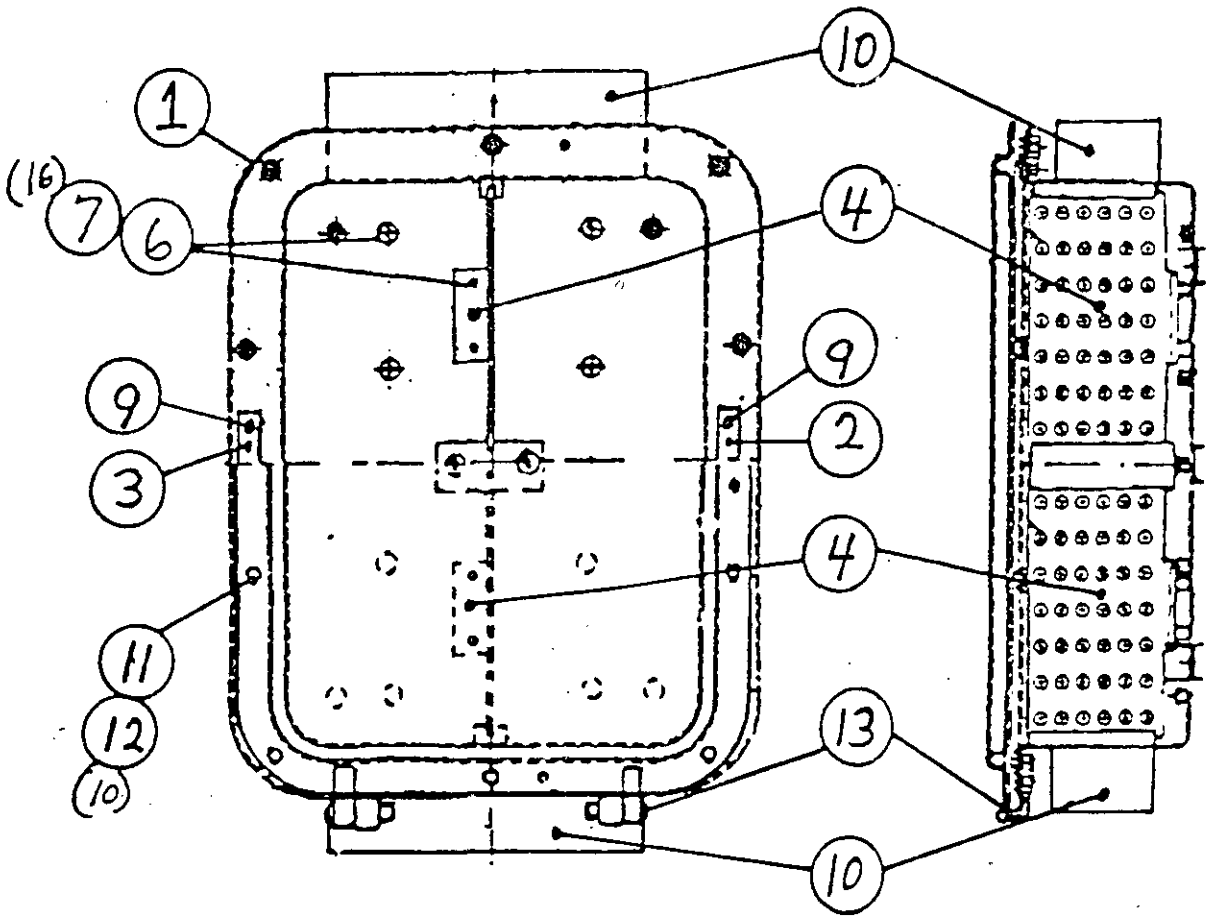


FIGURE 1. Interconnection box assembly, dual mini MCT frame showing connector patch panel installed, part number D24728/02-001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:26Z
Check the source to verify that this is the current version before use.

TABLE I. Parts list.

Item	Description	Quantity -001	Specification
1	Enclosure assembly aluminum with type B cover	1	MIL-E-24142/6
2	Identification plate	1	MIL-P-15024/6
3	Information plate	1	MIL-P-15024/14
4	Optical patch panel, connector	2	MIL-I-24728/1, figure 4
5	Optical patch panel, mechanical fusion splice	2	MIL-I-24728/1, figure 5
6	RH machine screw #10-24x5/8 inch long	18	-
7	Washer for #10 screw	18	-
8	FH machine screw #8-32x1/4 inch long	8	-
9	RH machine screw #6-32x1/4 inch long	4	-
10	Mini MCT frame	1	-
11	Cover, bolt	10	MIL-E-24142
12	Washer, SAE flat, 3/8 inch	10	
13	Hinge, cover, aluminum	1	MIL-E-24142

Source: https://assist.dla.mil -- Downloaded: 20260-20T01:26Z
Check the source to verify that this is the current version before use.

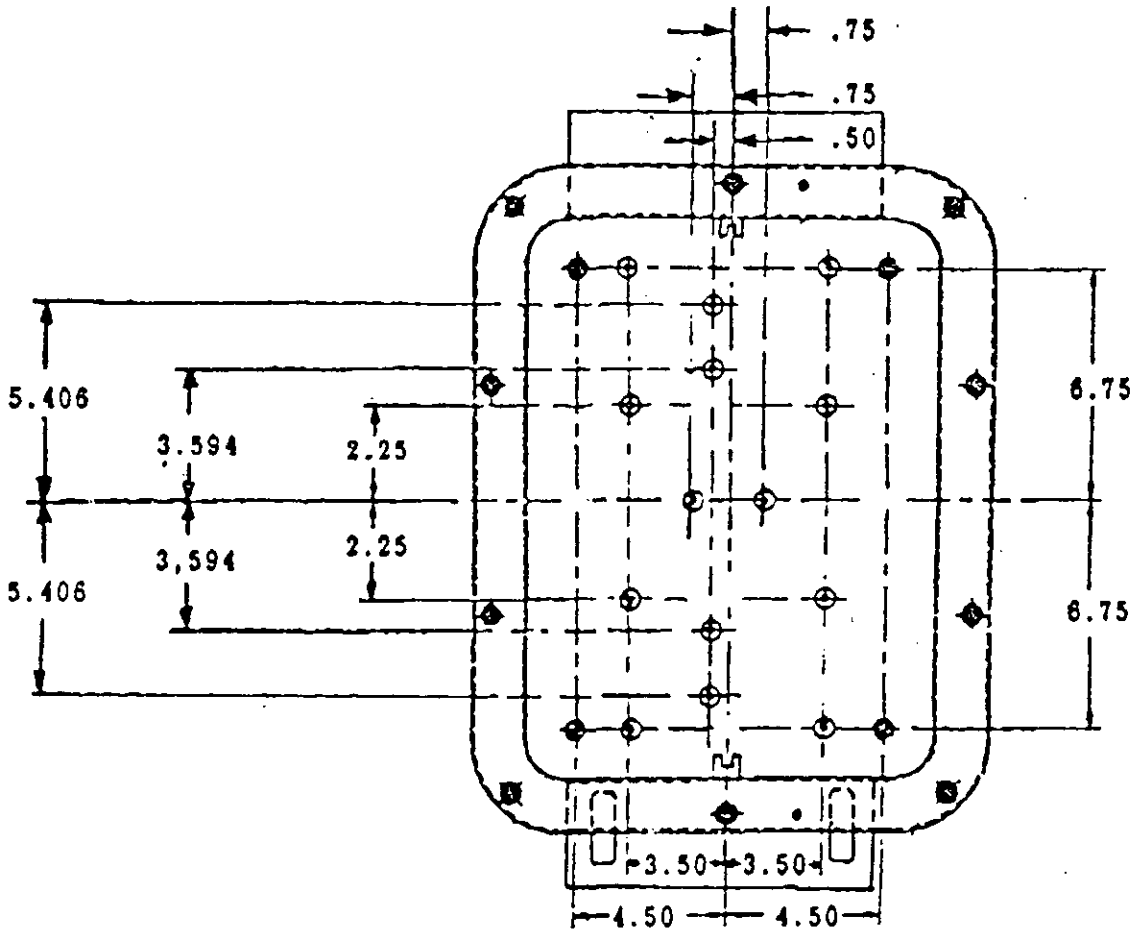


FIGURE 2. Location of optical patch panel mounting pads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:26Z
Check the source to verify that this is the current version before use.

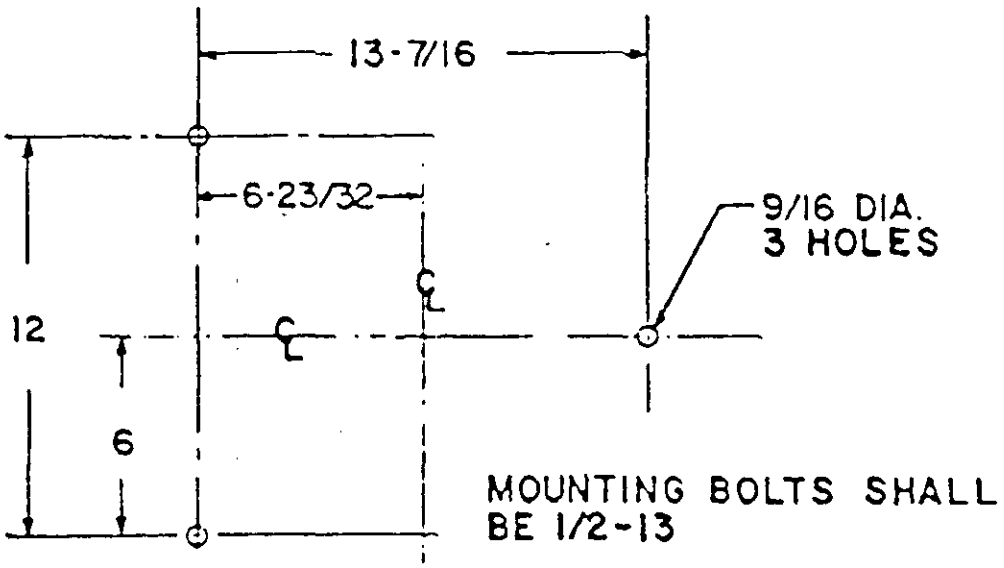


FIGURE 3. Interconnection box mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:26Z
Check the source to verify that this is the current version before use.

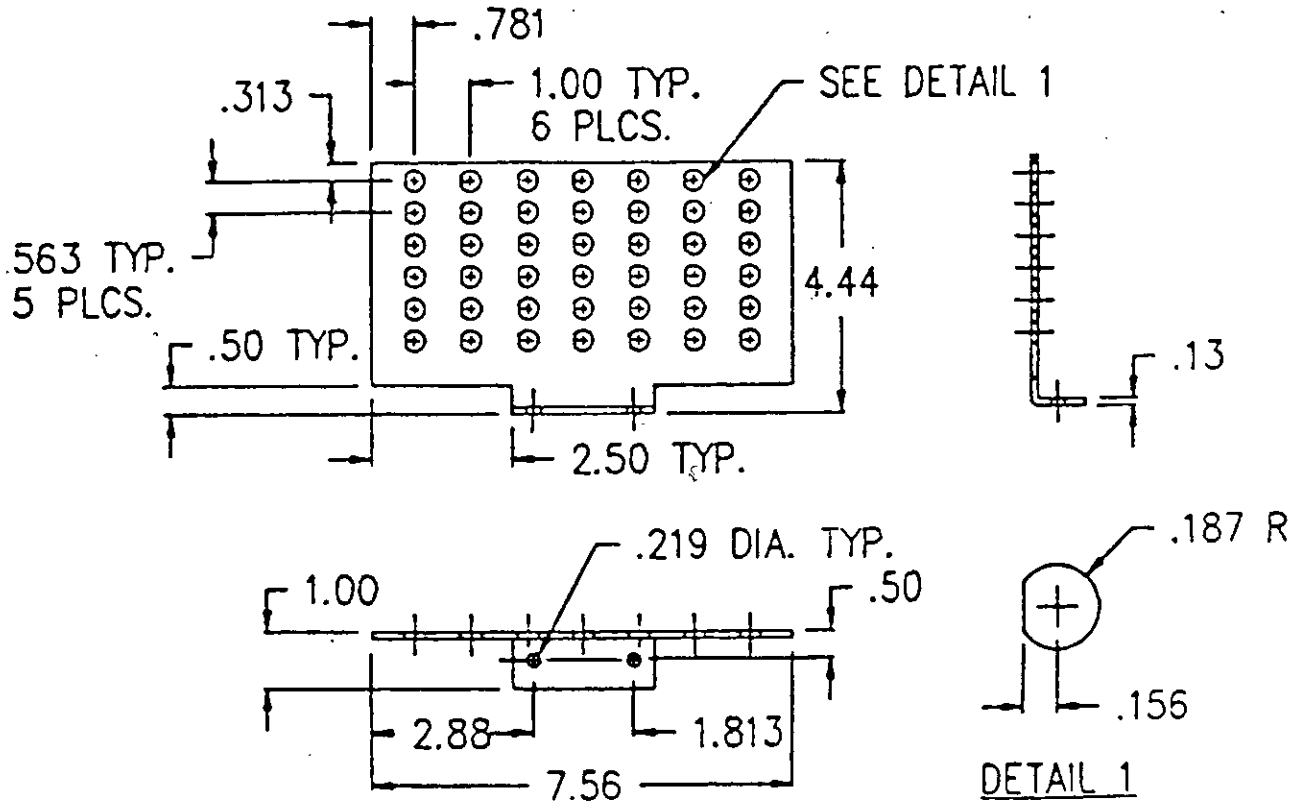


FIGURE 4. Optical patch panel, connectors.

Source: https://assist.dla.mil -- Downloaded: 202640-20T01:26Z
Check the source to verify that this is the current version before use.

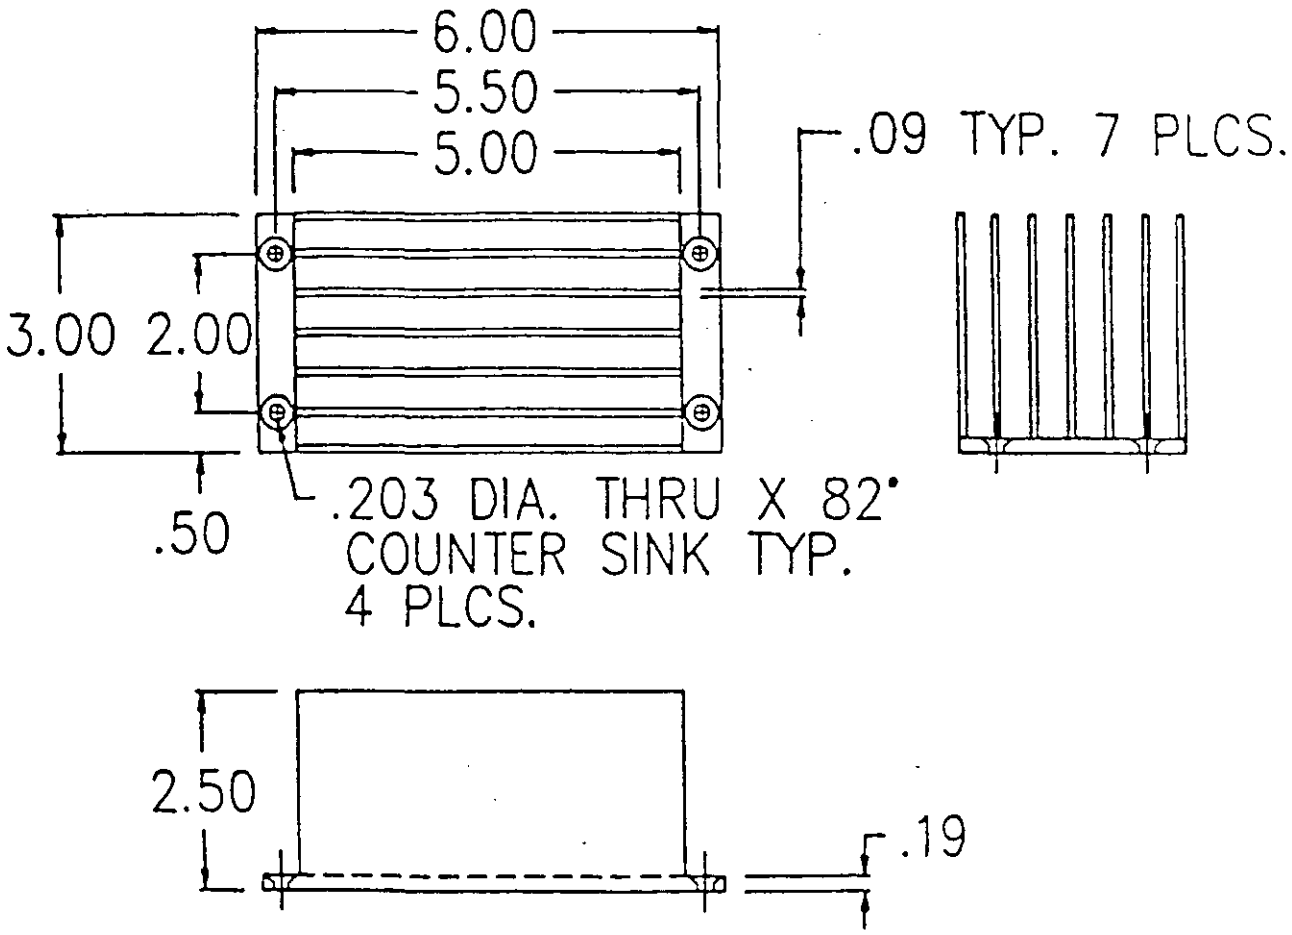
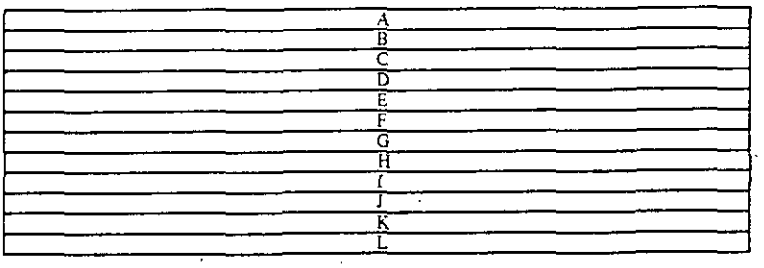
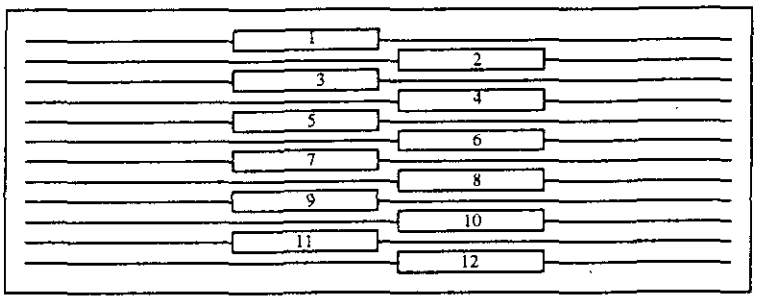


FIGURE 5. Optical patch panel, mechanical/fusion splices.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:26Z
Check the source to verify that this is the current version before use.






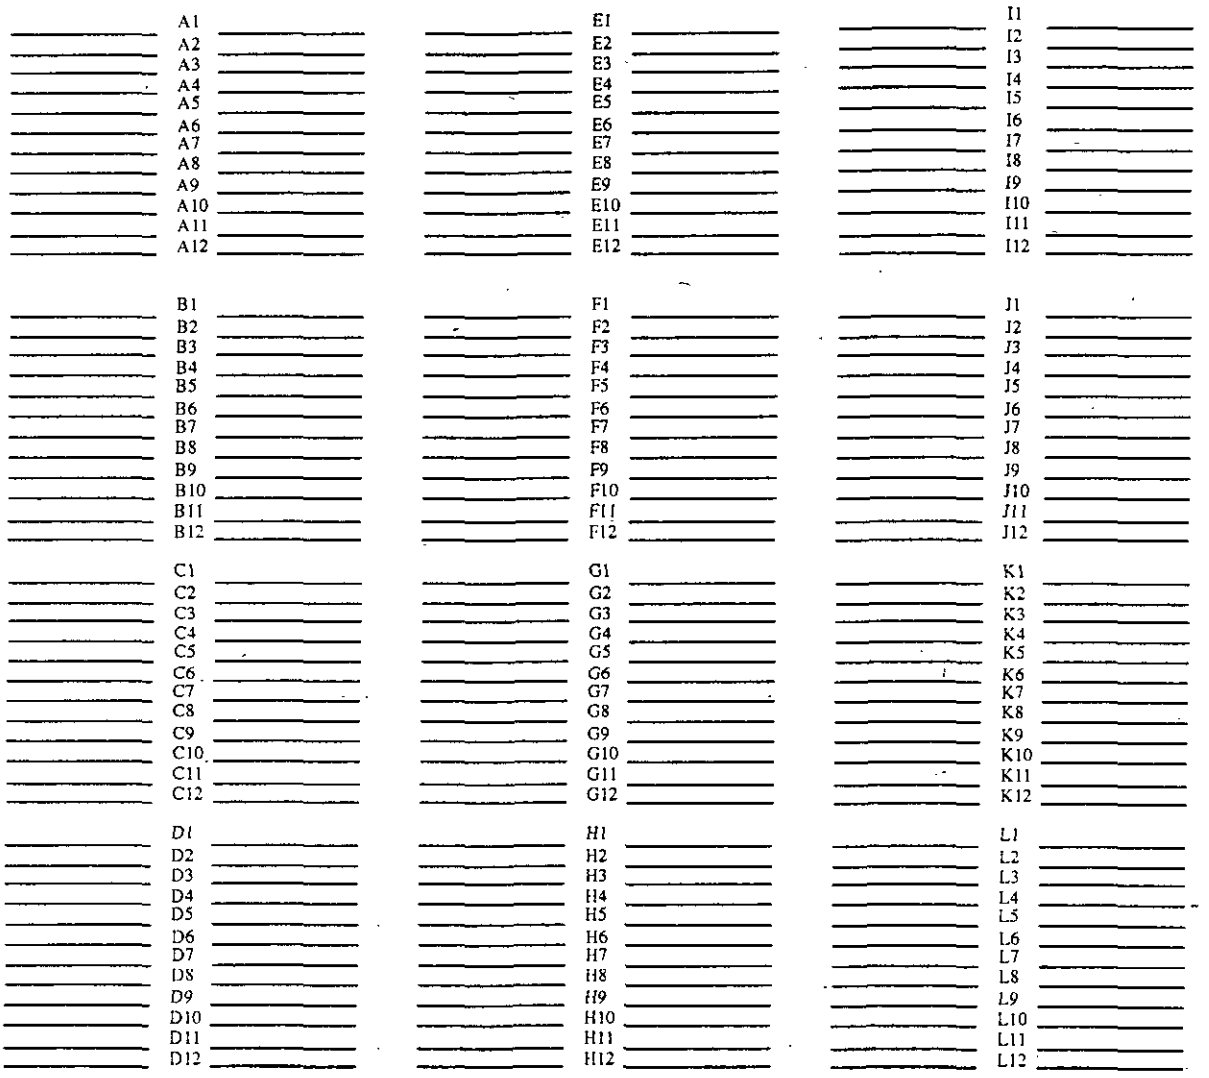


FIGURE 6. Splice Chart.

Source: https://assist.dla.mil -- Downloaded: 20260-20T01:26Z
Check the source to verify that this is the current version before use.

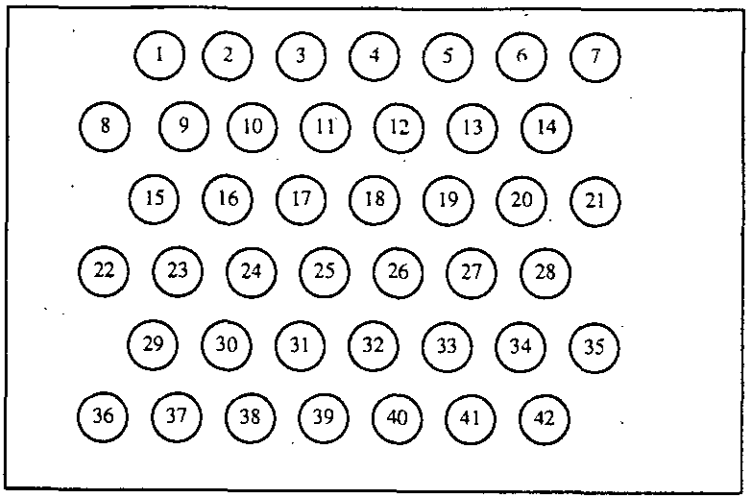

1
2
3
4
5
6
7

22
23
24
25
26
27
28

8
9
10
11
12
13
14

29
30
31
32
33
34
35

15
16
17
18
19
20
21

36
37
38
39
40
41
42

FIGURE 6. Splice Chart - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-20T01:26Z
Check the source to verify that this is the current version before use.