INCH-POUND
MIL-F-24724/2(SH)
15 February 1990

MILITARY SPECIFICATION SHEET

FILTER HOUSINGS (HYDRAULIC) AND DIFFERENTIAL PRESSURE INDICATORS (4 AND 6 ELEMENTS)

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-24724(SH).

AMSC N/A
FSC 4330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:21Z
Check the source to verify that this is the current version before use.

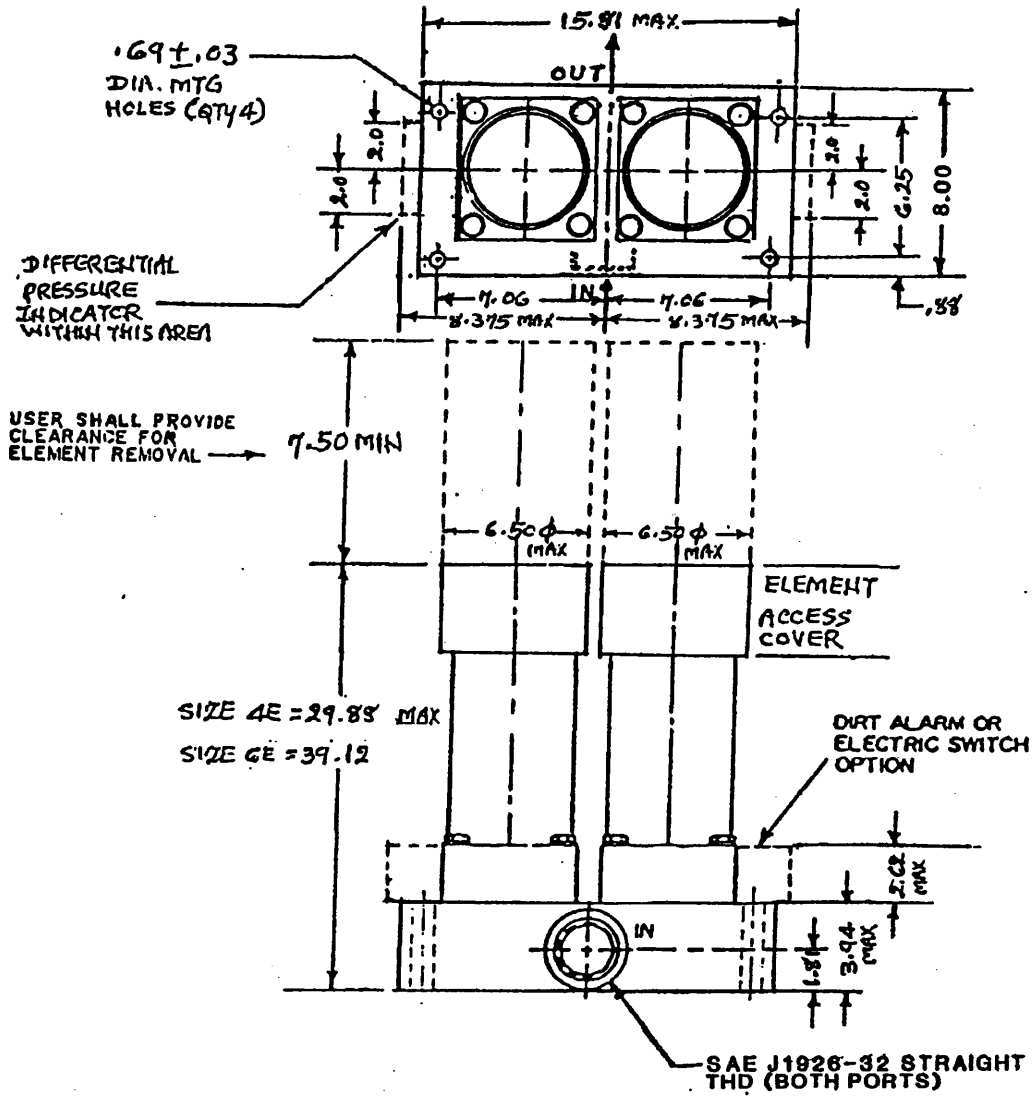


FIGURE 1. Filter housing.

NOTES:

1. Filter housing shall be in accordance with figure 1.
2. Unless otherwise specified, dimensions are in inches. All dimensions have tolerance of ±.06, except as noted.
3. Element access cover shall incorporate a sealing device, integral to the access cover, for the filter element.
4. Sizes in table I are specific to the number of elements required (size 4E, four elements; size 6E, six elements).
5. Servicing clearance required to change elements shall be 7.50 inches maximum.
6. A bypass valve assembly shall be an integral part of the filter housing. Indicators shall be designated as "M", mechanical or "E", electrical.
7. For these filter housings, use MIL-F-24702/1 filter element, as applicable.
8. In filter housings requiring more than one element, use MIL-F-24702/1 element connector to connect elements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Bypass relief valve setting:
   (a) Cracking pressure: see table I.
   (b) Minimum reseat pressure: 80 percent of minimum cracking pressure
   (c) Maximum full flow pressure: 150 percent of minimum cracking pressure.
2. Housing pressure drop: see table I.
3. Fatigue impulse cycles: 10 million.
4. Operating pressure: 3,000 lb/in^2.

TABLE I. Filter size and flow capacity and pressure indicator style.

Housing size dash no.	Flow vs. differential pressure drop MIL-H-17672, 68 centistoke		Pressure indicator style	Cracking pressure setting min (lb/in^2)
	gal/min	lb/in^2 differential (max)		
4E	120	10	"M" or "E"	25 or 50
6E	180	15		50

Part numbers: The part number consists of the basic number of this specification sheet number plus applicable dash number for housing size, pressure indicator style, and cracking pressure setting selected from table I.

EXAMPLE: M24724/2-4E-M 25

- 25 — Bypass setting
- M — Indicator style
- 4E — Housing size
- 2 — Specification sheet number
- M24724 — Specification number

Preparing activity:
Navy - SH
(Project 4330-N051-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:21Z
Check the source to verify that this is the current version before use.