METRIC
MIL-R-24727/1(NAVY)
31 August 1989

MILITARY SPECIFICATION SHEET

ROTARY JOINTS, FIBER OPTIC, SHIPBOARD, SINGLE FIBER, ON-AXIS, MULTIMODE CABLE PIGTAIL (METRIC)

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-24727.

CLASSIFICATION

Type S - Single fiber.
Style A - On-axis.
Port construction B - Cable pigtail, multimode.

MATERIALS

Shaft: 17-4 PH stainless steel.
Housing: 303 stainless steel.

DESIGN AND CONSTRUCTION

Fiber optic pigtail: In accordance with MIL-C-85045 and MIL-C-85045/14.
Seals: N/A.
Enclosures: Watertight.
Size: See figure 1.
Weight: ≤ 0.170 kg.
Color: Gray.

AMSC N/A
FSC 6004
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20260-20T01:23Z
Check the source to verify that this is the current version before use.

PERFORMANCE REQUIREMENTS

Insertion loss: ≤ 3.0 dB.
Return loss: N/A.
Rated rotational rate: 1000 revolutions per minute.

Rotational torque:

With seals: ≤ 0.014 N-m.
Without seals: ≤ 0.0011 N-m.

Temperature range: 2 (Operating, minus 28 to plus 65°C, Storage, minus 62 to plus 71°C).

Crosstalk: N/A.
Radiation: Conducted at low operating temperature only.


PART OR IDENTIFYING NUMBER: D24727/01-001.

PART DESIGNATOR: SAB.

Review activities:
Navy - EC, YD

Preparing activity:
Navy - SH
(Project 6004-N001-01)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:23Z
Check the source to verify that this is the current version before use.

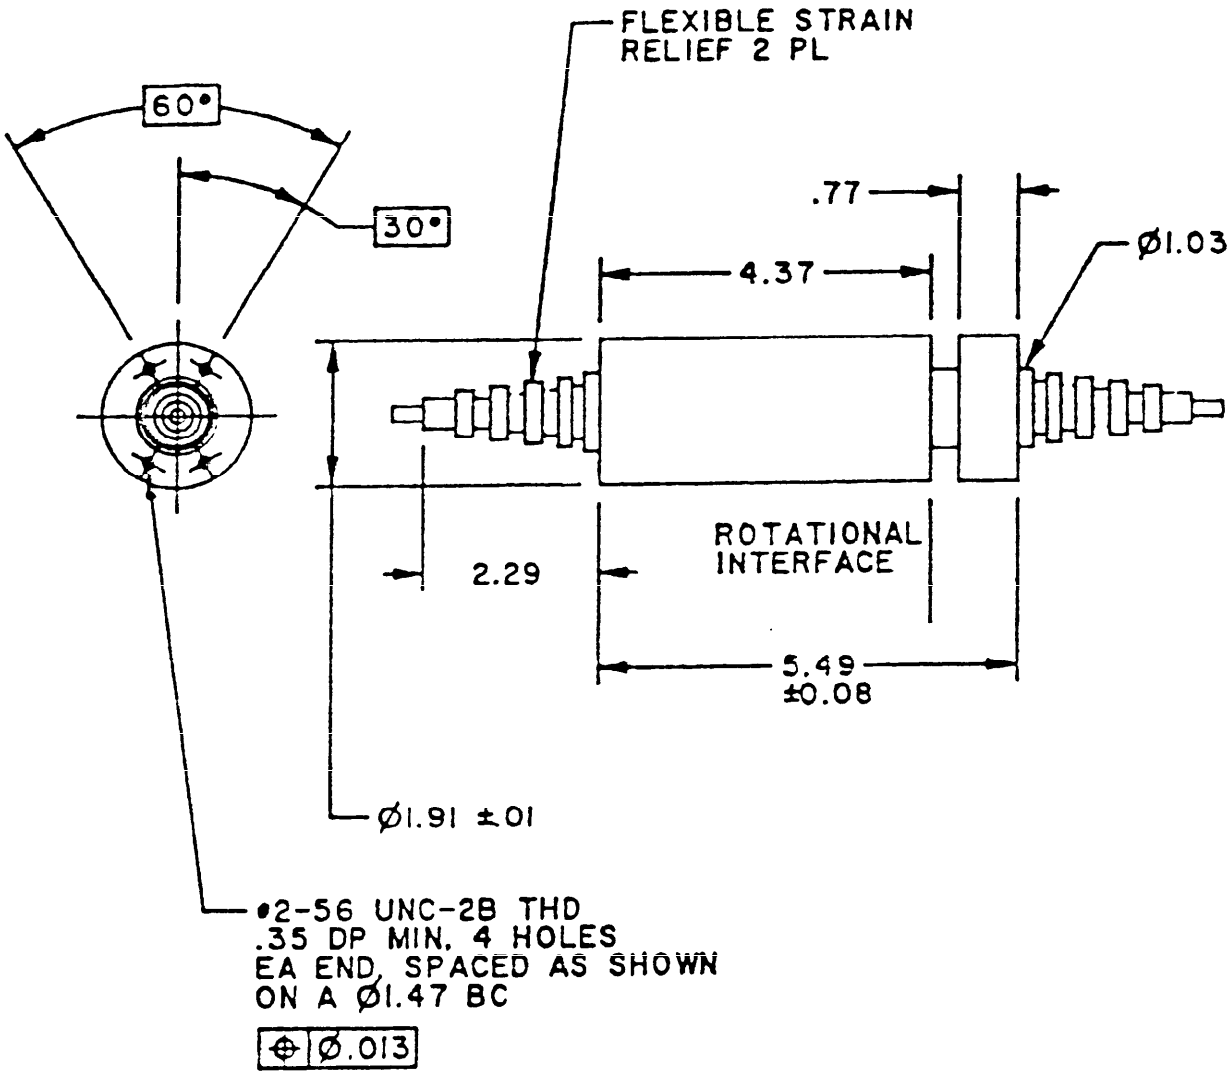

NOTES:
1. Dimensions in centimeters unless otherwise specified.
2. Tolerances: 2-place decimals plus or minus 0.03 except where noted.
3. External fiber optic pigtails shall be 1 meter.

FIGURE 1. Single fiber rotary joint.

Source: https://assist.dla.mil -- Downloaded: 202610-20T01:23Z
Check the source to verify that this is the current version before use.