MILITARY SPECIFICATION SHEET

ROTARY JOINTS, FIBER OPTIC, SHIPBOARD, MULTIPLE FIBERS, ON-AXIS, MULTIMODE CABLE PIGTAIL (METRIC)

This specification is approved for use by the Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-R-24727.

CLASSIFICATION

Type M - Multiple fibers.
Style A - On-axis.
Port construction B - Cable pigtail, multimode. .

MATERIALS: Interior torque coupling mechanism may contain magnetic components.

DESIGN AND CONSTRUCTION

Fiber optic pigtail: In accordance with MIL-C-85045 and MIL-C-85045/14.
Seal: N/A.
Enclosures: Watertight.
Size: See figure 1.
Weight: $\leq (1.5 + n(1.1))$ kg, where n = number of passes.
Color: Gray.

AMSC N/A
FSC 6004
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T01:23Z
Check the source to verify that this is the current version before use.

PERFORMANCE REQUIREMENTS

Insertion loss: ≤ 4.0 dB.
Return loss: N/A.
Rated rotational rate: 20 revolutions per minute.
Rotational torque: ≤ 6.8 N-m.
Temperature range: 2 (Operating, minus 28 to plus 65°C, Storage, minus 62 to plus 71°C).
Radiation: Conducted at the low operating temperature only.

PART OR IDENTIFYING NUMBER: D24727/02-001 for 2 fibers
D24727/02-002 for 3 fibers
D24727/02-003 for 4 fibers
D24727/02-004 for 5 fibers

PART DESIGNATOR: MAB.

Review activities:
Navy - EC, YD

Preparing activity:
Navy - SH
(Project 6004-N001-02)

Source: https://assist.dla.mil -- Downloaded: 20260-20T01:23Z
Check the source to verify that this is the current version before use.

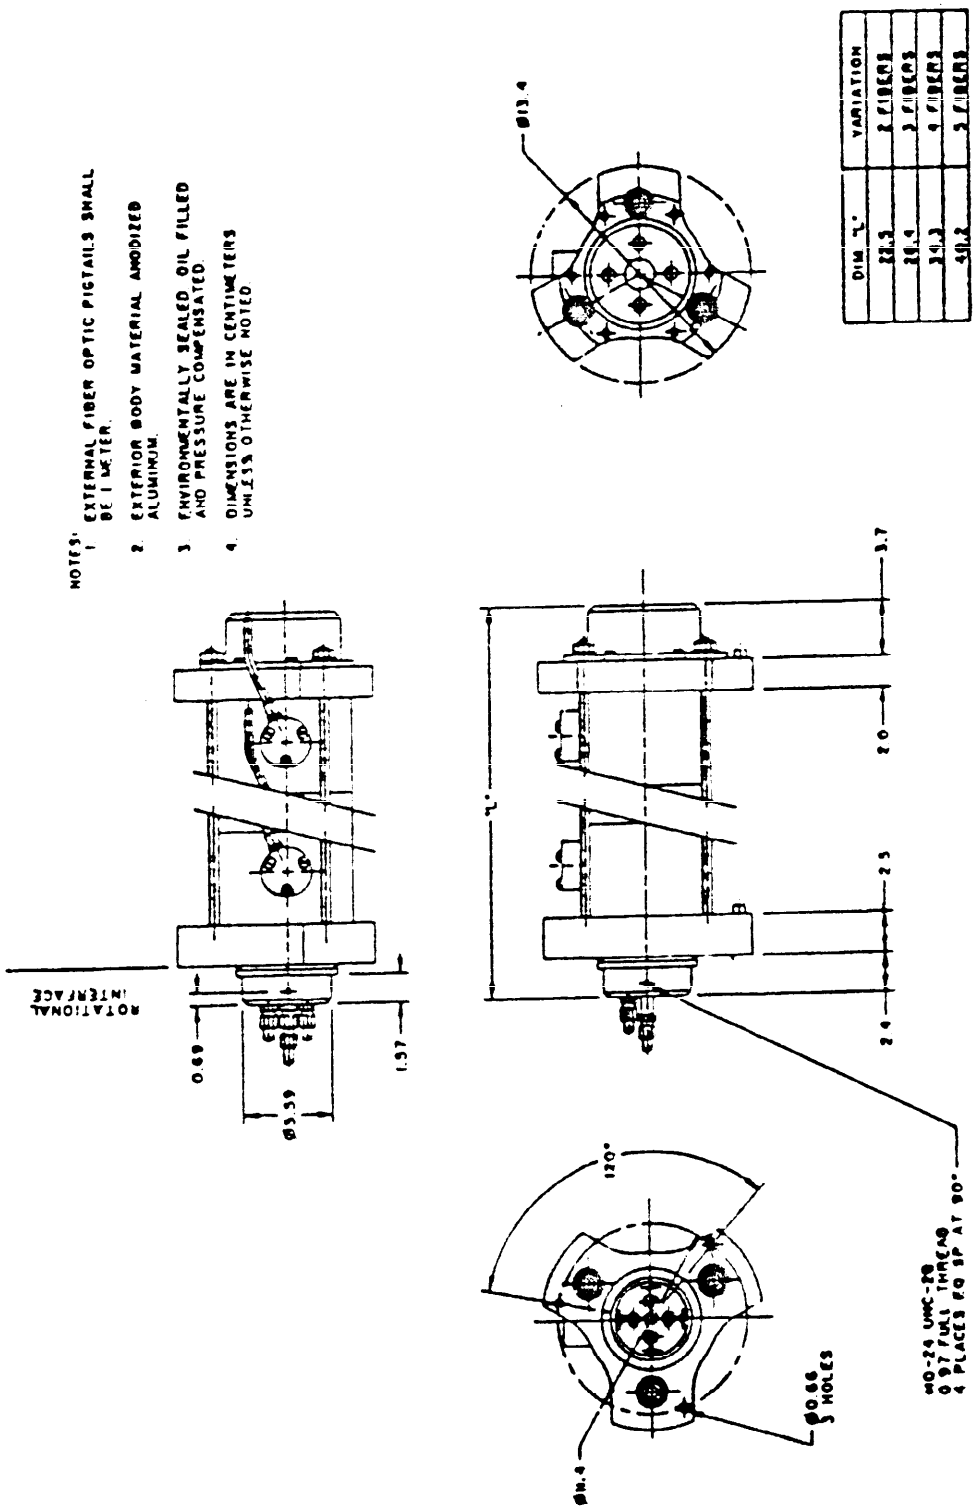


FIGURE 1. Multiple fiber rotary joint.

Source: https://assist.dla.mil -- Downloaded: 202610-20T01:23Z
Check the source to verify that this is the current version before use.