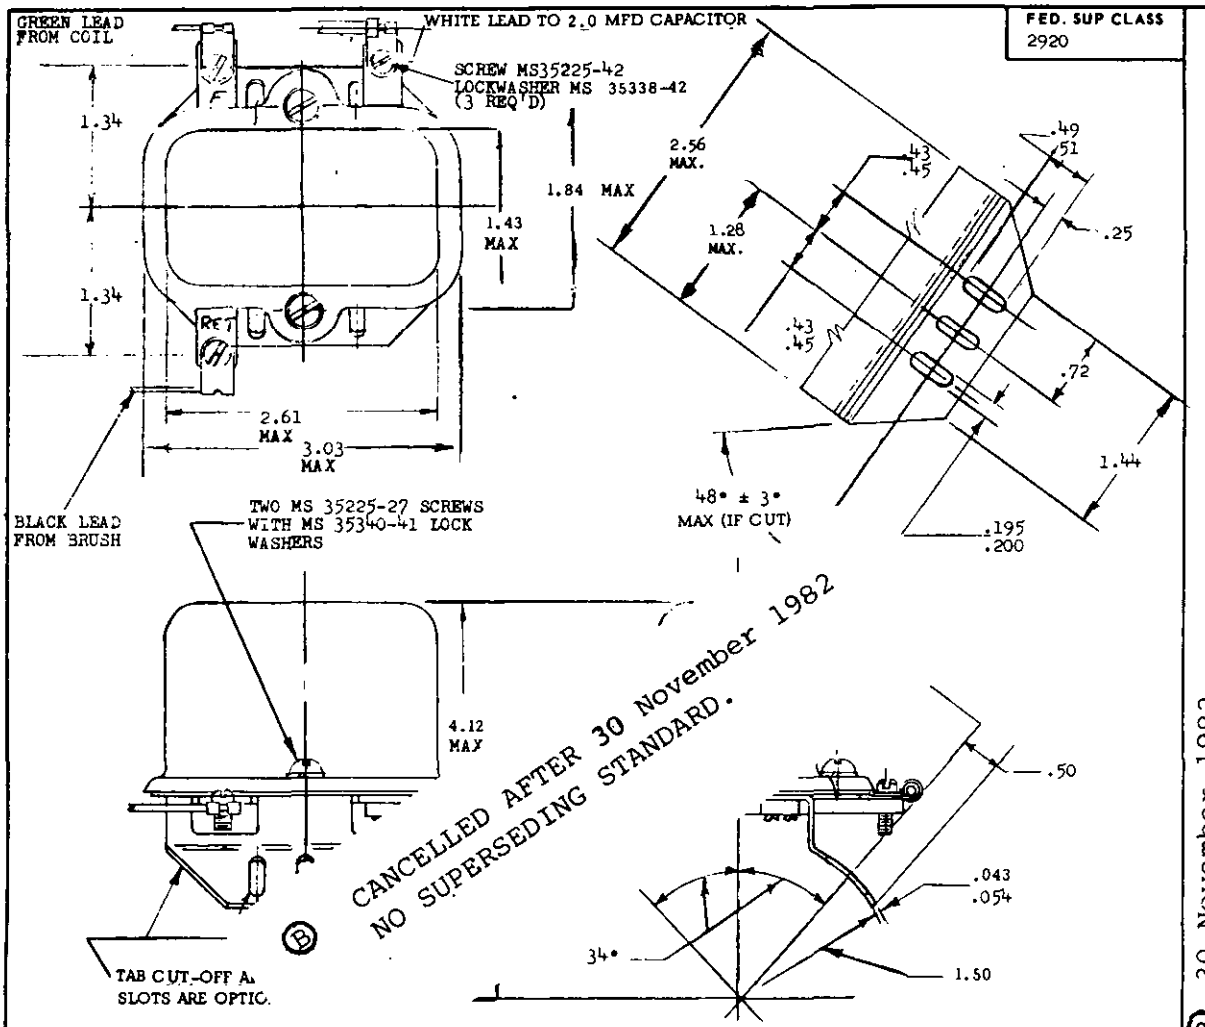

FED. SUP CLASS
2920

CANCELLED AFTER 30 November 1982
NO SUPERSEDING STANDARD.

APPROVED 7 MAY 1959 REVISED (A) 31 OCTOBER 1963 (B) 30 November 1982

NOTES:

1. MODIFICATIONS IN O[illegible]E APPEARANCE AND CONSTRUCTION ARE ACCEPTABLE IF UNIT INTERCHANGEABILITY IS NOT AFFECTED.
2. TOLERANCE UNLESS OTHERWISE SPECIFIED:
   DIMENSIONAL - PLUS OR MINUS 0.030
   ANGULAR - PLUS OR MINUS 1 DEGREE
3. VOLTAGE CONTROL:
   OPENS AT 80 DEGREES F. - 28.0/29.5 VOLTS
   OPENS AT 160 DEGREES F. - 29.0/30.5 VOLTS
   RE-CLOSES - 24.0 VOLTS MAXIMUM
4. ALL DIMENSIONS ARE IN INCHES.
5. FOR ASSOCIATED GENERATOR SEE MS 35876.
6. REGULATOR SHALL BE TESTED ON ASSOCIATED GENERATOR (MS 35876) FOR CONFORMANCE TO PERFORMANCE CURVES SHOWN ON SHEET 2 OF MS 35876.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
8. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(A) ENTIRE STANDARD REVISED

P.A. MD (EHDL) Other Cust DOCKS	TITLE: REGULATOR, VOLTAGE CONTROL, STEP TYPE; ENGINE GENERATOR (GENERATOR, ENGINE ACCESSORY, D. C., 28-VOLT, 5-AMPERE)	MILITARY STANDARD MS 35877
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET OF

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1982—605-034-293

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:30Z
Check the source to verify that this is the current version before use.