FED. SUP CLASS
6640

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
NAVY - AS
AIR FORCE - 82

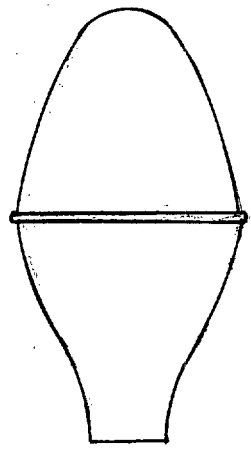

PART NUMBER	CAPACITY ML	O/A LENGTH (± 5) MM	OUTSIDE DIAMETER (± 5) MM
MS35978-1	2	38	8*
MS35978-2	Canceled - Replaced with MS35978-3		
MS35978-3	30	67	44
MS35978-4	60	86	54
MS35978-5	10	51	35
MS35978-6	15	60	38

*Tolerance ± 1 mm

MATERIAL: New natural, nonblooming, rubber.

DESIGN: Bulbs shall be ovoid-shaped with one end closed and the other ending in a circular neck having an opening into the interior of the bulb of 5+1 mm in diameter. It shall have an integral reinforcing bead at the midpoint of the body well.

NOTES:

1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. For design feature purposes, this standard takes precedence over procurement document referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. FSCM: 08455, 11273, and 22527.

APPROVED 23 DEC 1959 REVISED (A) 14 JUL 1969 (B) 17 FEB 1984

(B) ENTIRE STANDARD REVISED

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		BULB, DROPPING PIPET	MS35978
Procurement Specifications NNN-B-788	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1217

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:32Z
Check the source to verify that this is the current version before use.