FED. SUP CLASS
6630

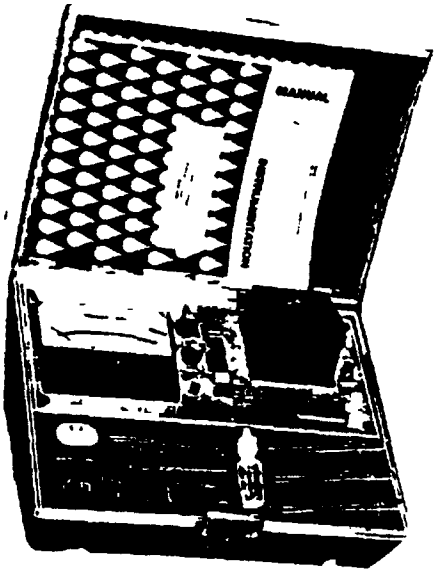

PART NUMBER	RANGE NTU*	RESPONSE TIME	POWER REQUIREMENT	O/L CASE DIMENSIONS
MS36582-1	0-1, 0-10, 0-100	1 to 50 seconds	6V Rechargeable Battery or 120V/ 60Hz AC	36 x 27 x 22 cm
MS36582-2	SAME	SAME	6V Rechargeable Battery or 240V/ 50Hz AC	SAME

*NTU - Nephelometric Turbidity Units

MATERIAL: Case shall be of black ABS (acrylonitrile-butadiene-styrene) plastic in accordance with Federal Specification L-P-1183B

DESIGN: Kit shall be a portable, self-contained instrument powered by rechargeable nickel-cadmium batteries. The electronic components shall be completely solid state, requiring no warm-up time to stabilize the detector and no drifting of the meter. The kit shall come complete with 10 NTU turbidity standards, battery pack, charger and instruction manual

PURPOSE: For determining turbidity of water

NOTE:
1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein
2. Referenced documents shall be of the issue in effect on date of invitations for bid

USER ACTIVITIES: ARMY - CE

REVIEWER ACTIVITIES: ARMY - AR, ME; AIR FORCE - ; NAVY - YD

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED 18 DEC 1981 REVISED

P A	INTERNATIONAL INTEREST	TITLE
EA		TURBIDIMETER, WATER TESTING
Other Cust MS 99		
Procurement Specifications NONE	SUPERSEDES:	

MILITARY STANDARD
MS36582
SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE
PROJECT NUMBER 6630-0194
STANDARD DATE

Downloaded from assist.dla.mil -- Downloaded: 2026-10-23T17:42Z
Check the source to verify that this is the current version before use.