FED. SUP CLASS
2640

(B) CANCELLED AFTER 25 JUNE 1976

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARD YEARBOOK PER ZZ-V-25

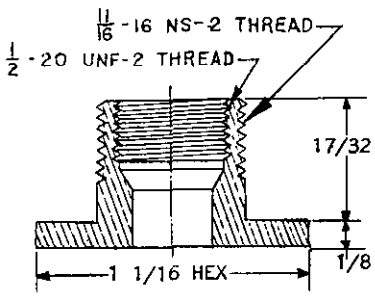

VALVE SPUD

NOTES:

1. MATERIAL-BRASS QQ-B-626, HALF HARD, COMPOSITION 11.
2. DIMENSIONS SHOWN ARE IN INCHES.
3. THIS STANDARD IS NOT INDENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. THIS IS A DESIGN STANDARD AND SHOULD NOT BE USED AS A PART NUMBER.

APPROVED 25 MARCH 1971 REVISED (A) 1 JUNE 1971 (B) 25 JUNE 1976

MS DASH NO.	TR. NO.
MS 52118	HS-2

P.A. ARMY-AT Other Cust	TITLE VALVE SPUD, PNEUMATIC TIRE:	MILITARY STANDARD MS 52118(AT)
PROCUREMENT SPECIFICATION (A) NONE	SUPERSEDES:	SHEET OF

This military standard is approved by the U. S. Army Tank-Automotive Command, Department of the Army, and shall be used by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:20Z
Check the source to verify that this is the current version before use.