This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

USER ACTIVITIES

REVIEW ACTIVITIES

FED. SUP CLASS
2540

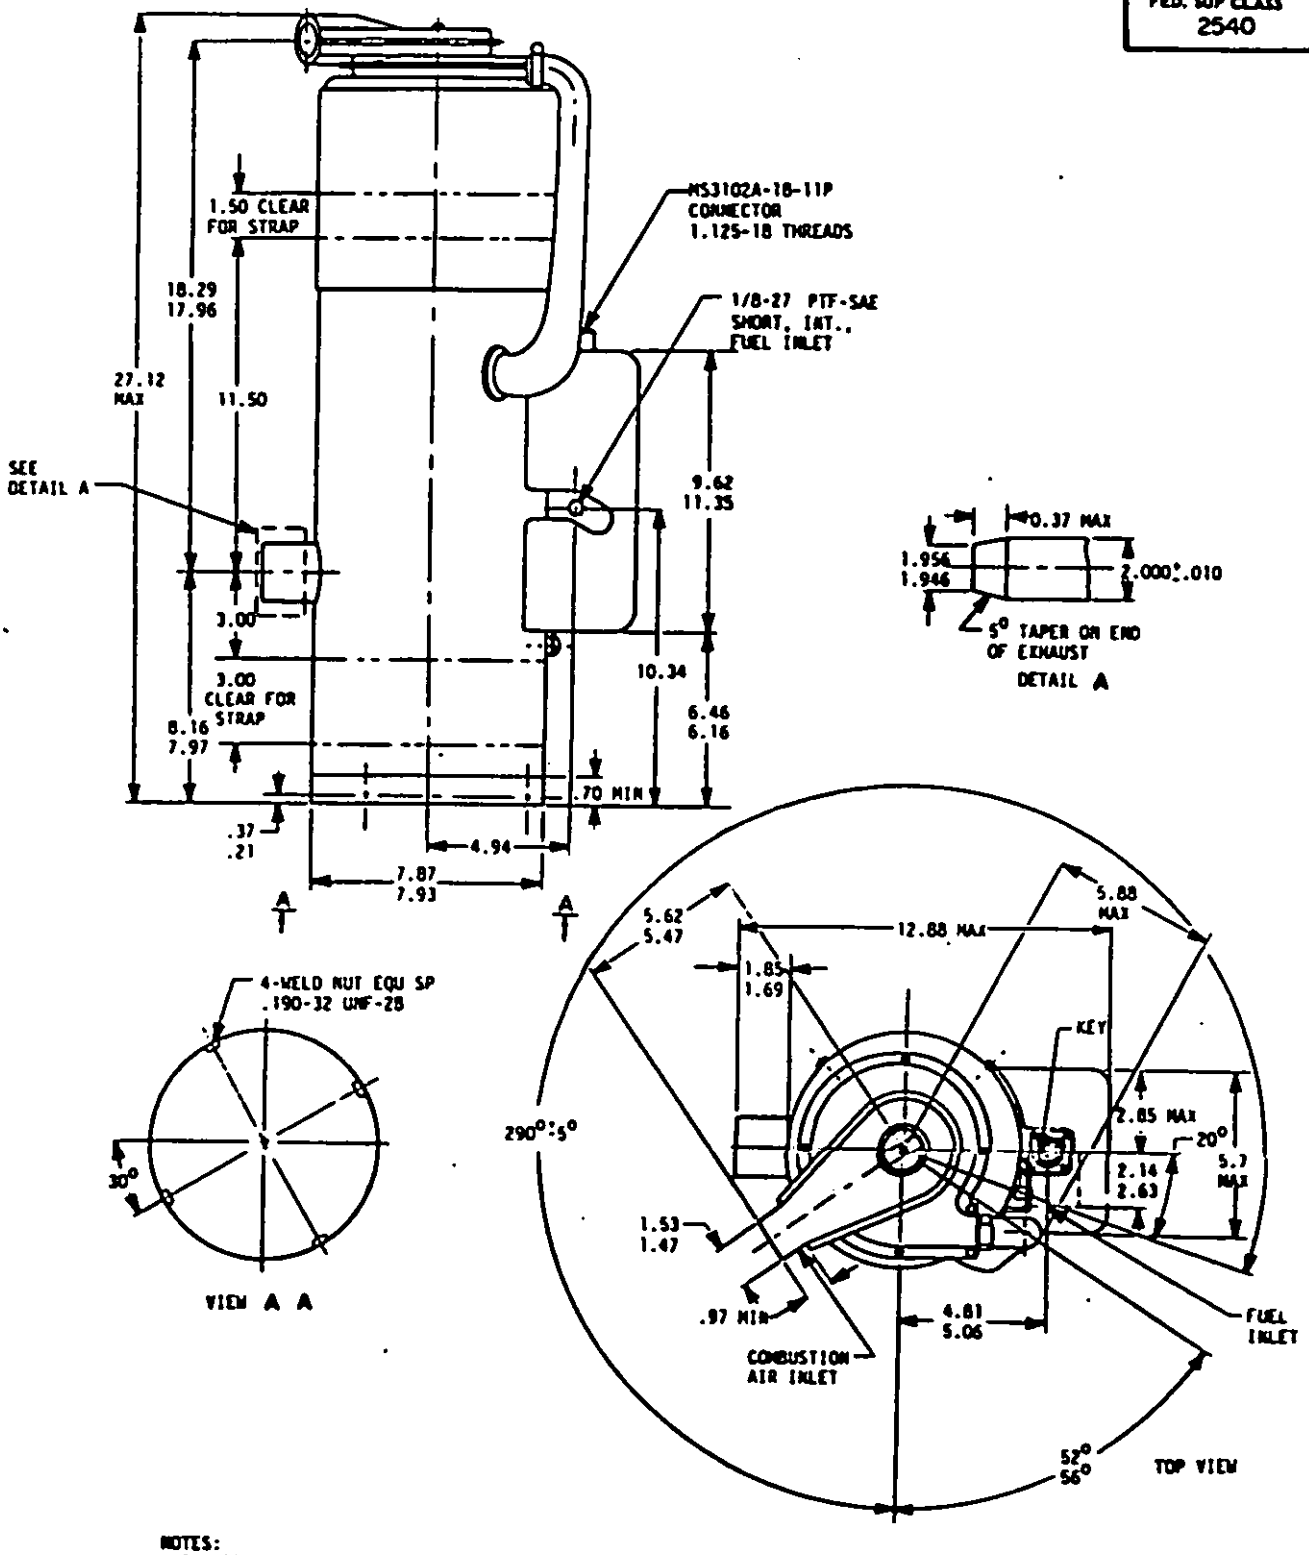

NOTES:
1. PERSONNEL HEATER MUST BE IN ACCORDANCE WITH SPEC MIL-H-62315 WHEN OPERATED WITH CONTROL BOX 11669705.
2. COMBUSTION AIR INLET MUST BE ROTATABLE TO ANY ANGLE WITHIN THE 290° RANGE.
3. SCREW HEAD ENVELOPE DIAMETER SHALL NOT EXCEED 0.19 INCHES.
4. A MINIMUM INSTALLATION CLEARANCE OF 4 INCHES AT THE AIR INLET TO THE BLOWER MUST BE PROVIDED.
5. A MINIMUM CLEARANCE OF 3 INCHES ABOVE THE HEATER COVER IS REQUIRED FOR SERVICING.
6. DIMENSIONS ARE IN INCHES. UNLESS NOTED, TOLERANCES ARE: ANGULAR ± 1°, 2 PLACE DECIMAL ± .06 INCHES.
7. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
8. THIS COMPONENT SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MI. 48397-5000.

P.A. ARMY-AT Other Cost	INTERNATIONAL INTEREST	TITLE HEATER ASSEMBLY, COMBUSTION, VEHICULAR COMPARTMENT, 60,000 BTU/HR, DUAL AIR TYPE	MILITARY STANDARD MS52288(AT)
PROCUREMENT SPECIFICATION MIL-H-62315	SUPERSEDES		SHEET 1 OF 1

Source: https://assist.dla.mil - Downloaded: 2026-10-28T18:24Z
Check the source to verify that this is the current version before use.

AMSC N/A 28 OCT 86