MIL-H-19793C(MC)
29 May 1979
SUPERSEDING
MIL-H-19793B(MC)
7 March 1962

MILITARY SPECIFICATION

HAVELOCK, PLASTIC

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a havelock made of clear vinyl film and constructed with heat sealed seams.

1.2 Classification. The havelocks shall be of one type in the following sizes, as specified (see 6.2).

Schedule of Sizes

21	21-1/2	22	22-1/2	23	23-1/2	24

2. APPLICABLE DOCUMENTS.

*2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-375	- Plastic Film, Flexible, Vinyl Chloride
V-T-276	- Thread, Cotton
UU-P-268	- Paper, Kraft, Wrapping
DDD-L-20	- Label; for Clothing, Equipage, and Tentage, (General Use)
DDD-T-86	- Tape, Textile, Cotton, General Purpose, (Unbleached, Bleached, or Dyed).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters, U. S. Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:40Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-F-10884	- Fastener, Snap
MIL-B-17757	- Box, Shipping, Fiberboard, (Modular Sizes)
MIL-C-17867	- Caps, Service, Women's Wool and Polyester/Wool

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitching

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington D. C. 20026).

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:40Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS.

*3.1 Standard samples. Standard samples are furnished solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the sample, in which case the specification shall govern.

*3.2 Frist article. When specified (see 6.2), the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.4 and 6.4).

3.3 Materials.

*3.3.1 Basic Material. The basic material shall be 0.0040 ± 0.0004 inch thick clear, colorless, flexible vinyl film conforming to type I, class 1 of L-P-375. The material shall have a smooth, dull matte finish on both sides.

*3.3.2 Sweatband. The sweatband shall be grosgrain ribbon made of rayon warp yarns and cotton filling yarns. The finished ribbon shall be 15/16 inch ± 1/16 inch wide, shall have a minimum weight of 0.20 ounce per linear yard, and have a minimum thread count of 185 in the warp and 30 per inch in the filling. The color of the ribbon shall be silver gray to harmonize with the vinyl film, and the colored ribbon shall show good fastness to water, crocking, and perspiration when tested as specified in 4.5.2

3.3.3 Thread. Thread shall be white mercerized cotton, ticket No A, 3 ply, conforming to type IC1 of V-T-276.

3.3.4 Snap fastener. The snap fastener shall conform to style 3, finish 3, construction A, B, or C of MIL-F-10884.

*3.3.5 Tape. The white cotton tape shall be 1/4 inch wide preshrunk and shall conform to type I, class 1 or 2 of DDD-T-86, except that only the characteristics for yarn count and ply breaking strength (warp) and shrinkage shall apply.

*3.3.6 Labels. Each havelock shall have a combination identification-size label conforming to type IV, class 4 of DDD-L-20. The labels shall have colorfastness to laundering and transference as specified in DDD-L-20. Location of the label shall be on the underside of the sweatband. The content and format shall be as follows:

Size:
Stock Number:
Name of Contractor:
Contract Number:

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:40Z
Check the source to verify that this is the current version before use.

*3.4 Design. The havelock shall consist of a top crown piece, a lower crown piece, a two-piece visor, a one-piece cape with one snap fastener at front closure, and a grosgrain ribbon sweatband sewn to the bottom part of the visor. The havelock is designed to fit on service caps conforming to MIL-C-17867 (see Figure 1).

*3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The contractor's working pattern shall be identical to the standard patterns. The standard patterns provide 1/8-inch seam allowance for the heat sealed seams. Standard patterns show size and seam allowances, and are marked or notched for proper placement and assembly of the component parts.

*3.5.1 Pattern parts. The havelock shall be cut from the materials specified herein in accordance with the pattern parts indicated below:

Item	Pattern Nomenclature	No. of cut parts
	Material: Vinyl film	
1.	Top crown	1
2.	Lower crown	1
3.	Cape	1
4.	Visor	2
5.	Reinforcement patch	2

*3.6 Construction. Crown parts, including top crown dart, visor parts, and cape, shall each be joined together with heat sealed seams. Top and bottom edges of cape shall have sewn hems. Front ends of cape shall be self reinforced with a heat sealed him for attachment of snap fastener. Juncture point of visor and cape shall be reinforced with cotton tape and a patch of basic material. Center of visor and center front of crown shall be aligned. Back seam of lower crown shall be in line with dart seam of top crown. Center back of cape shall be in line with back seam of lower crown.

*3.6.1 Stitches, seams, and stitching. The stitch, seam, and stitching types specified herein shall conform to FED-STD-751. Thread breaks and ends of stitching shall be securely backstitched at least 1/2 inch when not caught in other stitching. All stitching shall be made with stitch type 301, 8-10 stitches per inch.

Source: https://assist.dla.mil -- Downloaded: 202640-19T06:40Z
Check the source to verify that this is the currentversion before use.

*3.6.2 Heat sealed seams. The heat sealed seams shall meet the strength requirement specified for bondability of the vinyl film in L-P-375, and shall be watertight showing no evidence of leakage when tested as specified in 4.5.1. The sealed seams shall be a minimum of 1/8 inch wide, neatly made, uniformly heat sealed, continuous and shall not weaken the basic material. All raw edges of heat sealed seams shall be located on the interior of the havelock.

*3.6.3 Reinforcement patch. The reinforcement patches for use at juncture of cape front edges and crown shall be cut in accordance with pattern. They shall be heat sealed to the inside of the havelock 1-1/8 ± 1/8 inches to the front of the juncture point of visor and cape, and with the bottom edge of the patch 1/4 to 5/16 inch below bottom seam of crown. The length of the patch shall be parallel with the bottom seam of the crown.

*3.6.4 Reinforcement tape. A 3 ± 1/4 inch long piece of the cotton tape specified in 3.3.5 shall be sewn along the back raw edge of bottom part of visor and continued along front edge of cape, on the inside, from 1-1/2 ± 1/4 inches to the front to 1-1/2 ± 1/4 inches to the back of the juncture point of visor and cape. Stitching shall be along center of tape, seam type SSa-1.

*3.6.5 Sweatband. The ends of the sweatband shall be hemmed 1/2 ± 1/8 inch, stitching type EFa-1, stitched 1/8 inch from the raw ends. The hem shall be made on the underside (label side) of the sweatband. The underside of the sweatband shall be lapped on the outside of bottom part of visor 1/4 to 3/8 inch over inner edge. Seam the sweatband to the visor 1/16 inch from edge of sweatband, seam type LSa-1. On the finished havelock, the finished ends of the sweatband shall be not more than 1/4 inch from the ends of the visor.

*3.6.6 Snap fastener.

*3.6.6.1 Form hems. A 3/8-inch-wide strip of the vinyl film shall be placed on the inside of the cape parallel with each front end and approximately 3/4 inch from the edges, and heat sealed to the cape as a reinforcement for the snap fastener parts. The front ends of the cape shall be folded 1/2 to 5/8 inch to the inside over the reinforcement strip with the cut edge of the ends turned under not less than 1/16 inch, forming a hem. The inner edge of the hem shall be heat sealed to the body of the cape, and the outer edge of the hem shall be heat sealed to form a 1/32 inch beaded edge along the finished front ends. As an alternate, two 0.008 inch vinyl films, 1/2 inch in width and 2-3/4 ± 1/8 inches in length, shall be superimposed over the front ends with edges sealed on all sides to form a 1/32 inch beaded edge.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:40Z
Check the source to verify that this is the current version before use.

*3.6.6.2 Attach snap fasteners. The snap fastener parts shall be correctly positioned and securely attached to the film. The stud and socket shall conform in position to properly engage with each other. Snap fastener shall be attached through hem and reinforcement strip at top front corner of front ends of cape, with prong ring and socket on right side and stud and post on left side.

*3.6.7 Hems. The top and bottom edges of the cape shall be hemmed 1/4 inch wide using stitch type EFb-1, stitched not more than 1/8 inch from inner edge of hem. As an alternate, the top and bottom edges of the cape may be hemmed using a BSc-1 seam type. When alternate BSc-1 seam type is used, ends of stitching shall be secured by heat sealing a distance of 1/2 $\pm$ 1/8 inch from the end.

*3.6.8 Cleaning. Trim all ends of stitching and remove all loose ends of thread from the havelock. Remove all spots, stains and markings without injury to the material.

*3.7 Finished measurements. The finished havelock shall conform to the measurements shown of Figure 1.

*3.8 Fit. Havelocks shall fit snugly on the corresponding size cap for which it is intended (see 3.4).

*3.9 Workmanship. The finished havelocks shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the levels set by the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS.

*4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disappoved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

*4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:40Z
Check the source to verify that this is the current version before use.

*4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated havelock for all provisions of this specification.

*4.5 Quality conformance inspection.

*4.5.1 Testing of components. Testing of components shall be in accordance with the applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing shall be as specified in FED-STD-191, wherever applica e. Testing shall be performed on components listed in Table I for characteristics noted.

*4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements.

*4.5.3 Examination of the end item. The end item shall be examined for defects in 4.5.3.1, 4.5.3.2 and 4.5.3.3. The lots shall be inspected in accordance with 4.5.3.4. The sample unit for these examinations shall be one completely fabricated havelock.

*4.5.3.1 Visual examination. The end item shall be visually examined for defects. The inspection level and AQL for this visual examination shall be as specified in 4.5.3.4. The defects shall be classified as indicated below, except those with an asterisk (*) in classification column, which shall be classified as follows:

Major defect - When seriously affecting appearance or serviceability.

Minor defect - When affecting appearance or serviceability but not seriously.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:40Z
Check the source to verify that this is the current version before use.

TABLE I

Component & lot expressed in terms of	Character-istics	Rqmt. para.	Test method	Rqmts. appl. to: Spl. unit	Rqmts. appl. to: Lot avg	No. deter. per spl. unit	Results reported as	Insp. level	AQL
Sweatband (1 yard)	Color	3.3.2	Visual	X	-	1	Pass or fail	S-1	6.5
	Weight	3.3.2	5041	X	-	5	Avg. of 5 deter. to nearest 0.1 oz. per linear yard	S-1	6.5
	Width	3.3.2	Visual	X	-	1	Pass or fail	S-1	6.5
	Thread count: a. Warp ends	3.3.2	5050	X	-	5	Avg. of 5 deter. to nearest whole number	S-1	6.5
	b. Filling	3.3.2	5050	X	-	5	Avg. of 5 deter. to nearest whole number	S-1	6.5
	Material identification a. Warp yarns	3.3.2	1500	X	-	1	Pass or fail	S-1	6.5
	b. Filling yarn	3.3.2	1200	X	-	1	Pass or fail	S-1	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-04-19T06:40Z
Check the source to verify that this is the current version before use.

TABLE I

Component & lot expressed in terms of	Character-istics	Rqmt. para.	Test method	Rqmts. appl. to Spl. unit	Rqmts. appl. to Lot avg	No. deter. per spl. unit	Results reported as	Insp. level	AQL
Sweatband (1 yard) (cont'd)	Colorfastness								
	a. Water	3.3.2	5630	X	-	1	Excellent, good fair or poor	S-1	6.5
	b. Crocking:								
	Wet	3.3.2	5650	X	-	1	Excellent, good fair or poor	S-1	6.5
	Dry	3.3.2	5650	X	-	1	Excellent, good fair or poor	S-1	6.5
	c. Perspiration	3.3.2	5682	X	-	1	Excellent, good fair or poor	S-1	6.5

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
Quality of plastic material	Not of specified type	X		
	Tear, cut, hole, crack or break	X		
	Any mend or burn.	*		
	Not dull, matte finish		X	
	Crease, brittle or tacky film		X	
	Any weakening defect that may develop into a hole (including needle holes or needle chews).	*		
	Dirt, oil, foreign matter, spot, stain, ink or other discoloration which cannot be removed with a solvent or cleaning agent.	*		
	Objectional odor.		X	
Design and Construction	Varies from specified design and construction or approved sample.	X		
	Any characteristic not in accordance with specified requirements or approved sample.	X		
Workmanship and assembly				
General	Operation not accomplished as specified.	*		
	Component omitted or operation omitted.	X		
	Component not attached as specified.	*		
Seams				
a. Heat Sealed	Seam open or not sealed as specified.	X		

Source: https://assist.dla.mil -- Downloaded: 202640-19T06:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
a. Heat sealed (cont'd)	Poor heat seal, resulting in inadequate fusion.	*		
	Seal not in proper location.		X	
	Any area of seal not continuous resulting in weak or incomplete juncture.	X		
	Raw edge of film showing on outside of havelock.		X	
b. Seams, stitches, and stitching	Any part or component caught in any unrelated operation or stitching.	X		
	Hem appears on wrong side of havelock.		X	
	Seams twisted, puckered or pleated.	*		
	Thread break or ends of stitching not backstitched (when not caught in other seam or stitching).		X	
	Thread ends of stitching not heat sealed (alternate - see 3.6.7).		X	
	Wrong color thread.		X	
	Stitch margin irregular.		X	
	Wrong stitch margin.	*		
	Open seam 1/4 inch or more.	X		
	Open seam less than 1/4 inch.		X	
	NOTE: One or more broken (not backstitched) stitches or 2 or more continuous skipped or run-off stitches (not restitched) constitutes an open seam.			

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
b. Seams, stitches, and stitching (cont'd)	Raw edges.	*		
	Wrong seam or wrong stitch type.		X	
	Loose stitch tension resulting in loose seam or exposed needle or bobbin thread.		X	
	Tight tension (stitches break when normal strain is applied to seam or stitching.		X	
	One or two stitches per inch less than specified.		X	
	Three or more stitches per inch less than specified.	X		
	More than the required number of stitches per inch specified resulting in weakening or cutting of plastic material.	X		
	Thread ends not trimmed throughout havelock.		X	
Components				
a. Sweatband	Wrong material	X		
	Ends of sweatband hemmed less than 3/8 inch or more than 5/8 inch.		X	
	Not specified type or color.		X	
	Finished ends of sweatband more than 1/4 inch but less than 1/2 inch from ends of visor.		X	
	Finished ends of sweatband more than 1/2 inch from ends of visor.	*		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
b. Snap fastener	Not fabricated of material specified.	X		
	Not formed as specified.	X		
	Broken, bent, cracked, split, damaged, deformed or distorted.	*		
	Fin, burr, sharp edges, machine or die marks.		X	
	Subcomponent loose, not permitting good closure.		X	
	Wrong type, size, metal or finish.		X	
	Mismated.		X	
	Misplaced so that top or bottom corners of cape are uneven at front opening by more than 3/8 inch when snapped.		X	
	Reversed, i.e., stud on right side and socket on left side (of wearer).		X	
c. Reinforcement tape	Misshaped, mispositioned or uneven.	*		
	Not material specified.		X	
	Cut fabric used in lieu of cotton tape.		X	
d. Reinforcement patch	Reinforcement patch not of basic material.	X		
	Misshaped or mispositioned.	*		
	Not positioned on inside of havelock.	X		

Source: https://assist.dla.mil -- Downloaded: 20261O-19T06:40Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
e. Labels	Label missing, incorrect or illegible.		X	
	Not specified type or size.		X	
	Not printed on underneath side of sweatband.		X	

*4.5.3.2 Examination of finished measurements. The end item shall be examined for conformance to the finished measurements specified in Figure 1. The inspection level for examination of the finished measurements shall be S-3 of MIL-STD-105. The AQL for this examination shall be 4.0 defects per hundred units (DHU) for defects. Any finished measurement deviating from the finished measurements specified herein shall be classified as a finished measurement defect.

*4.5.3.3 Examination for size. The havelock shall fit properly on the applicable service cap listed in 3.4. Any havelock that does not fit properly shall be classified as a defect under 4.5.3.2.

NOTE: Service caps of corresponding size shall be obtained by the contractor for this examination.

*4.5.3.4 AQL's and inspection levels. The inspection levels and AQL's expressed in DHU shall be as follows:

	Inspection Level	AQL's	
		Major	Totals
For defects applicable to 4.5.3.1	II	2.5	10.0
For defects applicable to 4.5.3.2	S-3		4.0
For defects applicable to 4.5.3.3	S-1		6.5

*4.5.3.5 End item testing. Testing of the completely fabricated havelock shall be performed in accordance with Table II for the characteristic shown therein. The sample unit shall be one completely fabricated havelock.

Table II

Characteristic	Rqmt. para.	Test method	Rqmts. appl. to		No. det. per sample unit	Results reported as	Insp. level	AQL
			Spl. unit	Lot avg				
Waterproofness of heat seal seams	3.6.2	4.5.1	X	-	1	Pass or Fail	S-2	2.5

Source: https://assist.dla.mil -- Downloaded: 202640-19T06:40Z
Check the source to verify that this is the current version before use.

*4.5.4 Examination of preparation for delivery. Shipping containers fully prepared for delivery shall be examined for the defects listed below to determine conformance to packaging, packing and marking requirements. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 of MIL-STD-105. The AQL shall be 2.5 DHU.

Examine	Defect
Marking	Omitted, incorrect, illegible, or improper size, location, sequence or method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling, bulging or distortion of container.
Content	Number of bundles per shipping container is more or less than required. Number of havelocks per bundle is more or less than required. 1/

*4.5 Test.

*4.5.1 Test for leakage of seams. Havelocks shall be reversed (turned inside out) and placed over a sturdy framework without tension. The havelock shall then be filled with sufficient water (approximately 2 pints) to assure testing of all crown seams except lower seam attaching crown to cape. The seams shall withstand the water pressure for a minimum of 1 minute without evidence of leakage.

*4.5.2 Test for colorfastness and physical characteristics. Tests shall be conducted in accordance with methods of testing specified in FED-STD-191, wherever applicable, and as listed below:

Colorfastenss to	Method
Water	5630
Wet-dry crocking	5650
Perspiration	5682
Weight	5041

1/ For this defect, one bundle shall be examined from each shipping container in the sample.

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:40Z
Check the source to verify that this is the currentversion before use.

Thread count	Method
Warp and filling	5050
Material identification	
Warp yarns	1500
Filling yarns	1200

*5. PACKAGING.

*5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial as specified (see 6.2).

*5.1.1 Level A. Twenty-five (25) havelocks of one size only shall be put up in a bundle and securely tied with twine or cotton tape.

*5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice provided it meets the requirements specified for commercial packaging.

*5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

*5.2.1 Level A.

*5.2.1.1 Method 1. Seventy-five (75) havelocks of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container, conforming to weather-resistant class, size No. 1 of MIL-B-17757 and assembled, closed, and reinforced in accordance with the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.1.2 Method 2. When specified (see 6.2), 12 level B shipping containers (900 havelocks of one size only) shall be overpacked in a fiberboard shipping container, conforming to weather-resistant class, size No. 4 of MIL-B-17757 and assembled, closed, and reinforced in accordance with the appendix thereto. Towards the end of the contract, or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:40Z
Check the source to verify that this is the current version before use.

*5.2.2 Level B. Seventy-five (75) havelocks of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container, conforming to domestic class, size No. 1 of MIL-B-17757 and assembled and closed in accordance with the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.3 Commercial. Havelocks shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classifiecation Rule and U. S. Postal Service Manual or regulations of other carriers applicable to the mode of transportation.

*5.3 Marking. In addition to any special marking required by the contract shipping containers shall be marked in accordance with MIL-STD-129.

*5.3.1 Mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 X 4 inches with the words "MIXED SIZES" plainly stamped or printed thereon and under these words shall be legibly printed the correct quantity and sizes contained therein.

6. NOTES.

6.1 Intended use. Havelocks are worn on women's service caps for protection against inclement weather.

*6.2 Ordering data. Procurement documents should specify the folowing:

*6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. Size required (see 1.2).
c. When first article is not required (see 3.2 and 6.4).
d. Selection of applicable levels of preservation, packing packing (see 5.1 and 5.2).
e. When level A, method 2, packing is required (see 5.2.1.2).

*6.2.2 Contract data requirements. Data conforming to Data Item Description DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903, and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on DD Form 1423 included in the contract.

Source: https://assist.dla.mil -- Downloaded: 20260-19T06:40Z
Check the source to verify that this is the current version before use.

*6.3 Standard sample. The standard sample and color sample may be obtained from the procuring activity or as directed by the contracting officer (see 3.1).


*6.4 First article. Examination, tests and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Figure. Figure 1 shows the general design of the havelock and is furnished for information only. In the event of conflict between the figure and the text of this specification, the text of this specification shall govern.


*6.6 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Project No. 8410-N279


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T06:40Z
Check the source to verify that this is the current version before use.

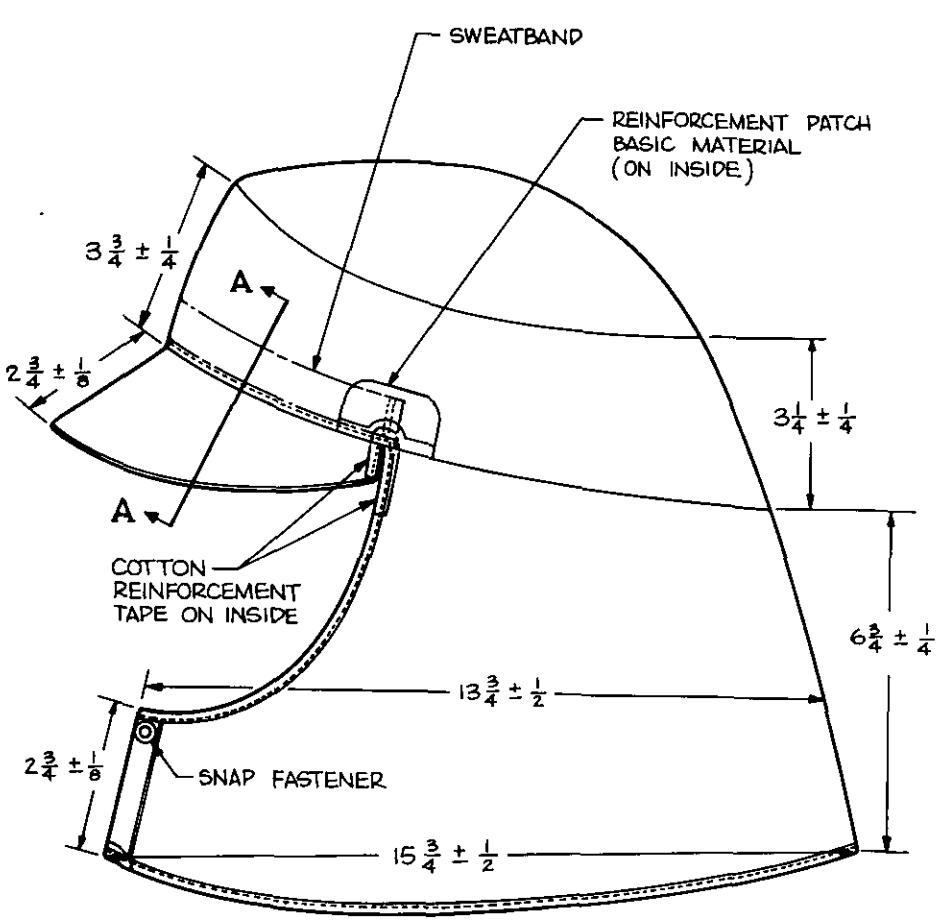

SIDE VIEW



SECTION A-A

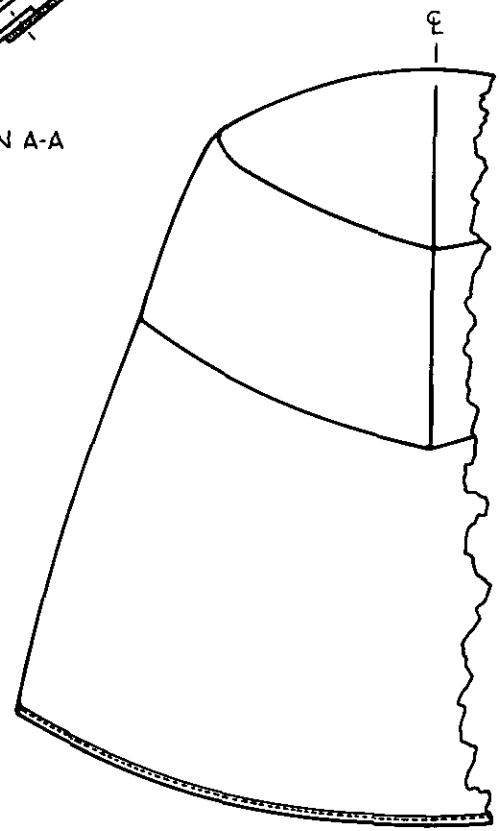

BACK VIEW

FIGURE 1A. HAVELOCK, PLASTIC

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-H-19793B(MC) Havelock, Plastic

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-19T06:40Z
Check the source to verify that this is the current version before use.