
MILITARY SPECIFICATION SHEET

BIT, SCREWDRIVER, SLOT, EXTERNAL HEX SHANK, MANUALLY DRIVEN

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the bits described herein shall consist of this specification and the latest issue of MIL-B-9946.

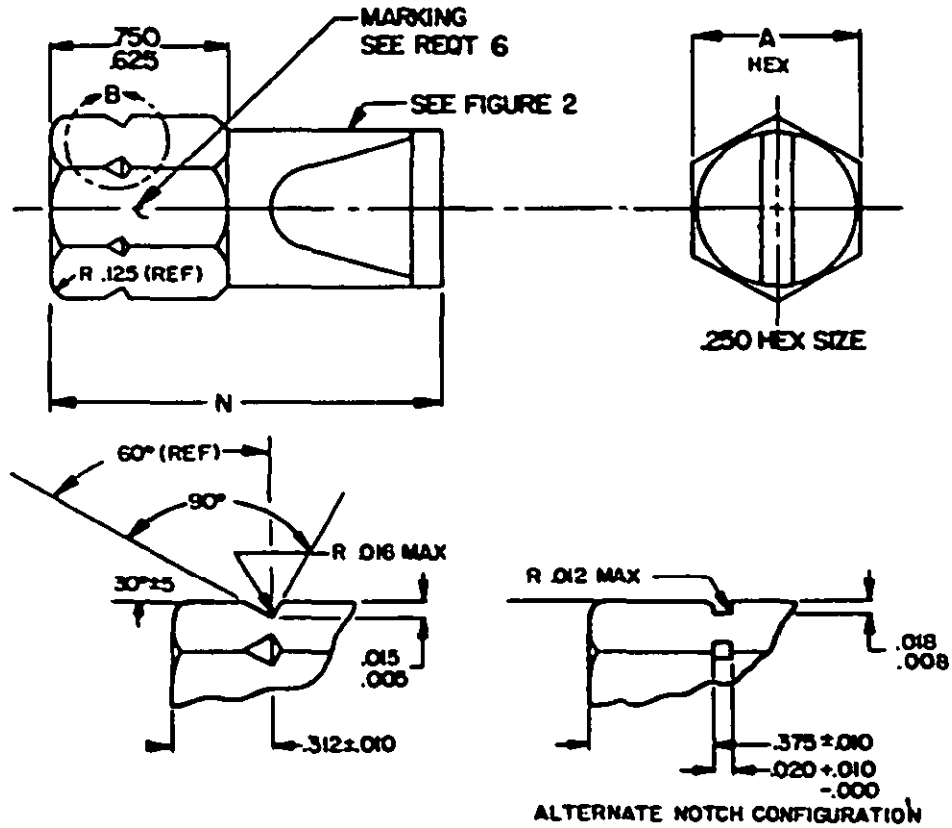

VIEW B-RETAINING GROOVE-NOTCH TYP SIX PLACES

NOTES:
1. All dimensions are in inches
2. Bit and retaining groove blade shall be in accordance with TABLE I.

FIGURE 1. BIT, SCREWDRIVER, SLOT, EXTERNAL HEX SHANK, MANUALLY DRIVEN

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:14Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	BIT DIMENSIONS						BLADE DIMENSIONS				ULTIMATE TORQUE MIN LBF - IN	FATIGUE TORQUE LBF - IN
	DRIVER SIZE NOM	SLOT SIZE NOM	SCREW DIAMETER SIZE RANGE FOR RECESS SIZE REF		A HEX +.000 -.004	N LENGTH ±.120	T THICKNESS +.000 -.003	W WIDTH		L LENGTH SCREW DRIVING SURFACE MIN		
			FLAT HEAD	ROUND HEAD				MAX	MIN			
1	.034	.034	#4	#5	.250	1.00	.034	.197	.182	.129	35	14
2	.040	.040	#6	#8	.250	1.00	.040	.229	.214	.150	75	30
2A	.040	.040	#6	#8	.312	1.50	.040	.229	.214	.150	75	30
3	.042	.042	#8	#10	.250	1.00	.042	.260	.245	.165	90	36
3A	.042	.042	#8	#10	.312	1.50	.042	.260	.245	.165	90	36
4	.046	.046	#10	#12	.250	1.00	.046	.291	.276	.179	135	54
4A	.046	.046	#10	#12	.312	1.50	.046	.291	.267	.179	135	54
5	.050	.050	#12	#14	.250	1.50	.050	.322	.307	.194	180	72
5A	.050	.050	#12	#14	.312	1.50	.050	.322	.307	.194	180	72
6	.055	.055	#14	#16	.250	1.50	.055	.369	.354	.208	230	92
6A	.055	.055	#14	#16	.312	1.50	.055	.385	.370	.208	275	110

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:14Z
Check the source to verify that this is the current version before use.

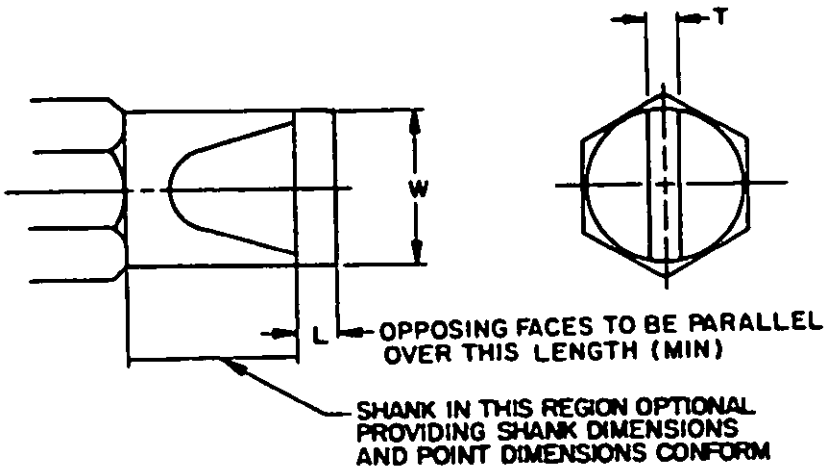


FIGURE 2. TIP POINT

REQUIREMENTS:

1. Material: Alloy Tool Steel in accordance with American Society for Testing Material (ASTM) A681, Shock-Resisting Steel, Type S-2, (UNS T41902).

2. Hardness: Macrohardness, (Rockwell C Scale) 56-62HRC. Three macrohardness readings shall be taken at the locations shown in FIGURE 3. Each hardness value must be within the range specified.

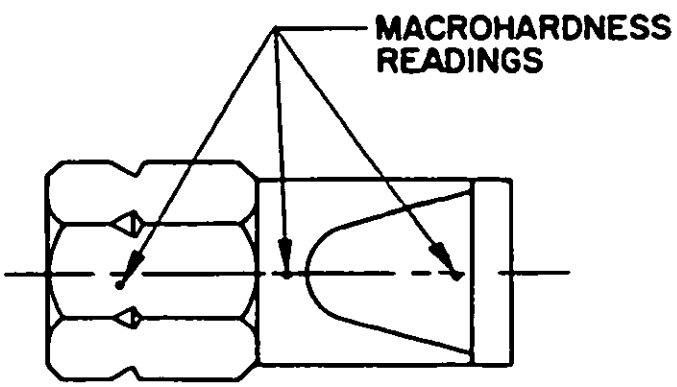


FIGURE 3. MACROHARDNESS READING LOCATIONS

Superficial hardness (Rockwell HR15N scale) 87-90. Superficial hardness readings shall be taken on bid samples at two locations on sectionalized specimens along the blade.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:14Z
Check the source to verify that this is the current version before use.

3. Tip point: Tip point shall be in accordance with FIGURE 2 and TABLE I.

4. Driver bit gage: Driver bit gage shall be in accordance with FIGURE 4 and TABLE II.

5. Test block: Test block shall be in accordance with FIGURE 5 and and TABLE III. Torque tests are conducted using this block as described herein and in MIL-B-9946.

6. Identification marking: Driver bits shall be marked by etching, stamping or engraving onto each bit the following minimum information:

   a. Military specification part number.

   b. Manufacturer's symbol or code.

   c. Country of manufacture.

7. Part number: The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number taken from TABLE I.

Example: M9946/14-4A

M9946/14-4A indicates - Bit, Screwdriver, Slot, External Hex Shank, Manually Driven; Screw Diameter Size, Flat Head 10, Round Head 12; Hex Size .312, Length 1.50.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:14Z
Check the source to verify that this is the current version before use.

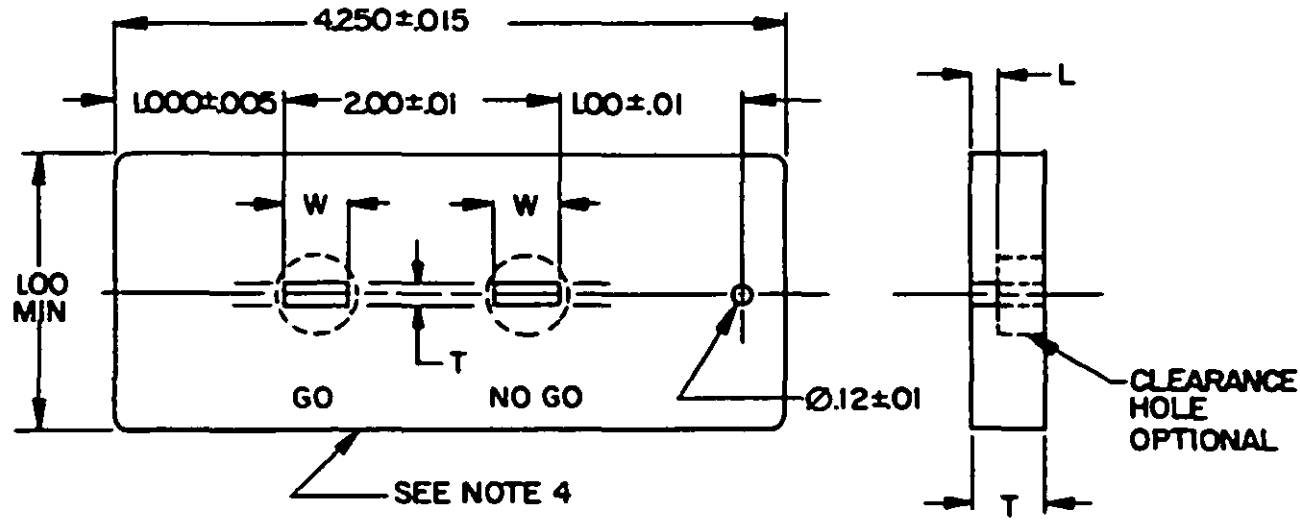


FIGURE 4. DRIVER BIT GAGE

TABLE II. DRIVER POINT GAGE DIMENSIONS FOR SLOT

DRIVER 1/ AND SLOT THICKNESS NOMINAL	GO				NO GO				L	T
	T		W		T		W			
	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MIN	±.005
1	.0343	.0340	.1973	.1970	.0310	.0307	.1820	.1817	.129	.250
2, 2A	.0403	.0400	.2293	.2290	.0370	.0367	.2140	.2137	.150	.250
3, 3A	.0423	.0420	.2603	.2600	.0390	.0387	.2450	.2447	.165	.250
4, 4A	.0463	.0460	.2913	.2910	.0430	.0427	.2760	.2757	.179	.250
5, 5A	.0503	.0500	.3223	.3220	.0470	.0467	.3070	.3067	.194	.312
6	.0553	.0550	.3693	.3690	.0520	.0517	.3540	.3537	.208	.312
6A	.0553	.0550	.3853	.3850	.0520	.0517	.3700	.3697	.208	.312

1/ Dash Numbers from TABLE I.

NOTES:
1. All dimensions are in inches.
2. Material: CRES in accordance with ASTM A276, Type 440C (UNS S44004).
3. Hardness: 58-62HRC
4. Marking: Stamp nominal driver and slot size and "GO" and "NO GO".

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:14Z
Check the source to verify that this is the current version before use.

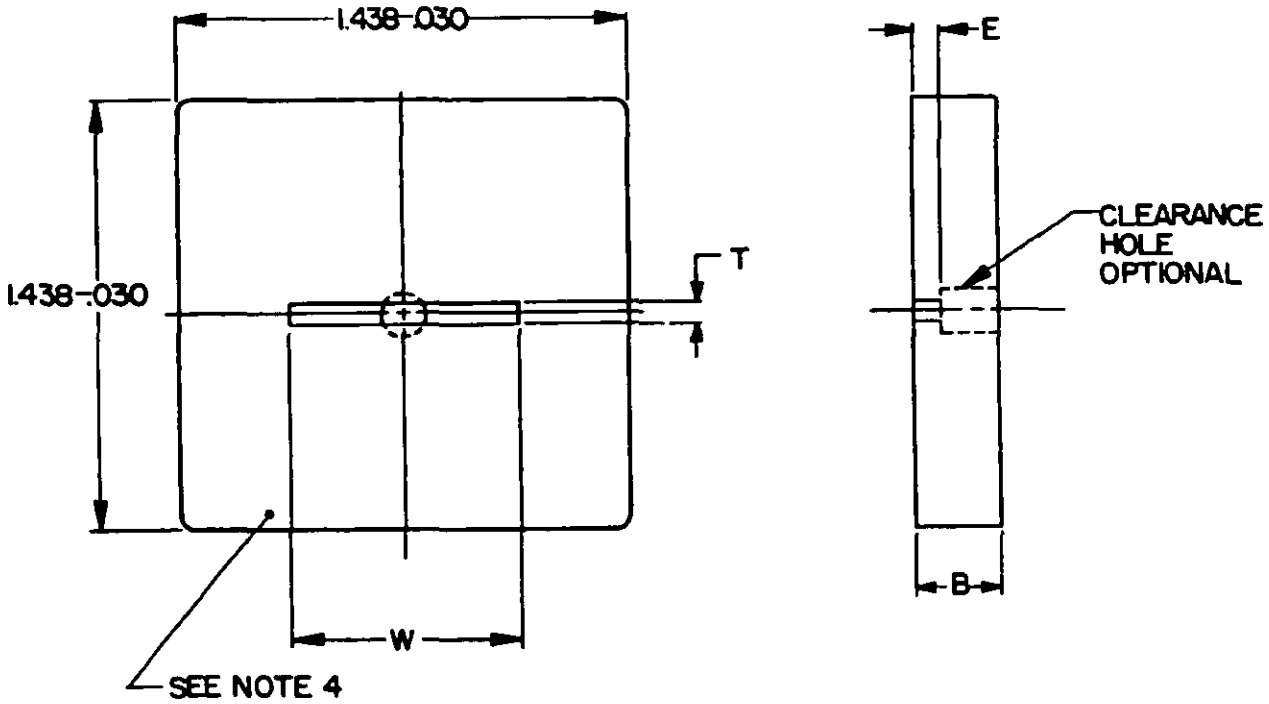


FIGURE 5. TEST BLOCK

TABLE III. TEST BLOCK DIMENSIONS FOR SLOT BITS

DASH NUMBER	W WIDTH ACROSS BLADE		T THICKNESS		E ENGAGEMENT		B BLOCK THICKNESS
	MAX	MIN	MAX	MIN	MAX	MIN	REF
1	.202	.197	.040	.035	.037	.034	.375
2, 2A	.234	.229	.046	.041	.043	.040	.375
3, 3A	.265	.260	.048	.043	.045	.042	.375
4, 4A	.296	.291	.052	.047	.049	.046	.437
5, 5A	.327	.322	.056	.051	.053	.050	.437
6	.374	.369	.061	.056	.058	.055	.437
6A	.390	.385	.061	.056	.058	.055	.437

NOTES:
1. All dimensions are in inches.
2. Material: Alloy Tool Steel in accordance with ASTM A681, Type S-2 (UNS T41902).
3. Hardness: 62-64HRC
4. Marking: Stamp nominal blade and slot size.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:14Z
Check the source to verify that this is the current version before use.

Custodians:
Army - GL
Navy - AS
Air Force - 99

Review Activities:
Army - AV
Air Force - 80
DLA - IS

User Activities:

Civil Agencies Coordinating Activities:
GSA - FSS

Preparing Activity:
Air Force - 84

Agent:
DLA - IS

(Project 5120-B063)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:14Z
Check the source to verify that this is the current version before use.