
MILITARY SPECIFICATION SHEET


BIT, SCREWDRIVER, PHILLIPS, STANDARD AND LONG EXTERNAL HEX SHANK, POWER DRIVEN

NON-RIBBED DRIVERS WITH DASH NUMBERS 1, 1A, 2, 2A, 3, 3A, 4 AND 4A ARE NOT RECOMMENDED FOR DOD USE, SEE MIL-B-9946/11 FOR RIBBED DRIVERS IN THESE SIZES.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the bits described herein shall consist of this specification and the latest issue of MIL-B-9946.

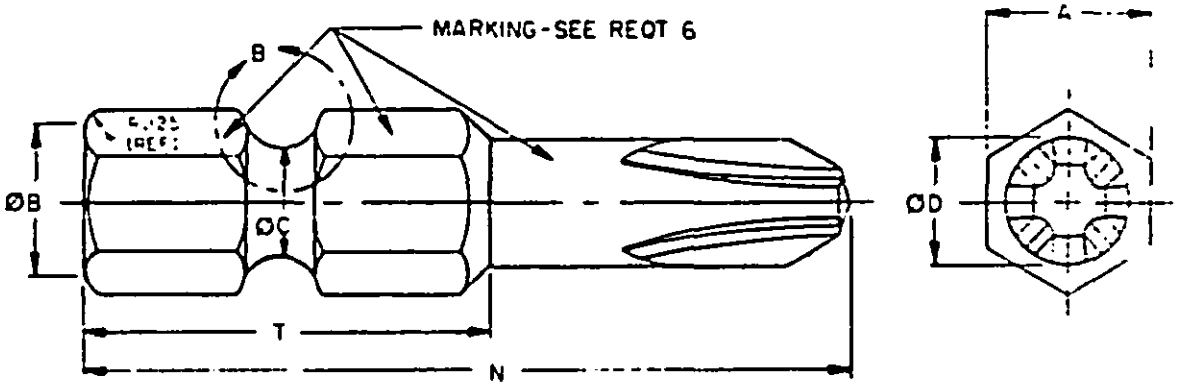

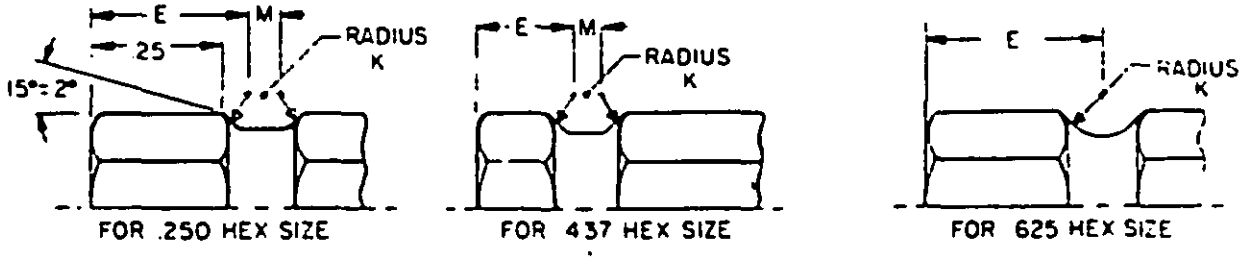

VIEW-B-RETAINING GROOVE

NOTES:
1. All dimensions are in inches.
2. Bit and retaining groove shall be in accordance with TABLE I.

FIGURE 1. BIT, SCREWDRIVER, PHILLIPS, STANDARD AND LONG EXTERNAL HEX SHANK, POWER DRIVEN

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

FIRST DASH NUMBER	DRIVER SIZE	RECESS SIZE	SCREW DIAMETER SIZE RANGE FOR RECESS SIZE REF	A HEX +.000 −.004	ØB REF	ØC ±.010	ØD SHANK	E ±.020	K RAD ±.005	M ±.020	T	SECOND DASH NUMBER N ±.120 BIT LENGTH 1.94	2.75	3.50	6.00	SHANK DIAMETER	ULTIMATE TORQUE MIN LBF-IN	FATIGUE TORQUE LBF-IN
0	0	0	#0, #1	.250	.203	.188	.125 / .121	.375	.094	.062	1.375 / .625	A	B	C	D	STD	12	-
1	1	1	#2, #4	.250	.203	.188	.125 / .121	.375	.094	.062	1.375 / .625	A	B	C	D	STD	33	17
1A	1	1	#2, #4	.250	.203	.188	.185 / .180	.375	.094	.062	1.375 / .625	A	B	C	D	LARGE	33	17
2	2	2	#6, #8, #10	.250	.203	.188	.185 / .180	.375	.094	.062	1.375 / .625	A	B	C	D	STD	90	45
2A	2	2	#6, #8, #10	.437	.391	.344	.434 / .429	.250	.109	.047	1.375 / 1.000	A	B	C	D	LARGE	90	45
3	3	3	1/4	.250	.203	.188	.247 / .242	.375	.094	.062	1.375 / .625	A	B	C	D	STD	325	160
3A	3	3	1/4	.437	.391	.344	.434 / .429	.250	.109	.047	1.375 / 1.000	A	B	C	D	LARGE	325	160
4	4	4	5/16, 3/8, 7/16, 1/2, 9/16	.437	.391	.344	.434 / .429	.250	.109	.047	1.375 / 1.000	A	B	C	D	STD	500	250
4A	4	4	5/16, 3/8, 7/16, 1/2, 9/16	.625	.609	.531	.622 / .617	.344	.172	—	1.375 / 1.000	A	B	C	D	LARGE	500	250

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Alloy Tool Steel in accordance with American Society for Testing Material (ASTM) A681, Shock-Resisting Steel, Type S-2, (UNS T41902).

2. Hardness: Macrohardness, (Rockwell C Scale) 56-62HRC. Three macrohardness readings shall be taken at the locations shown in FIGURE 2. Each hardness value must be within the range specified.

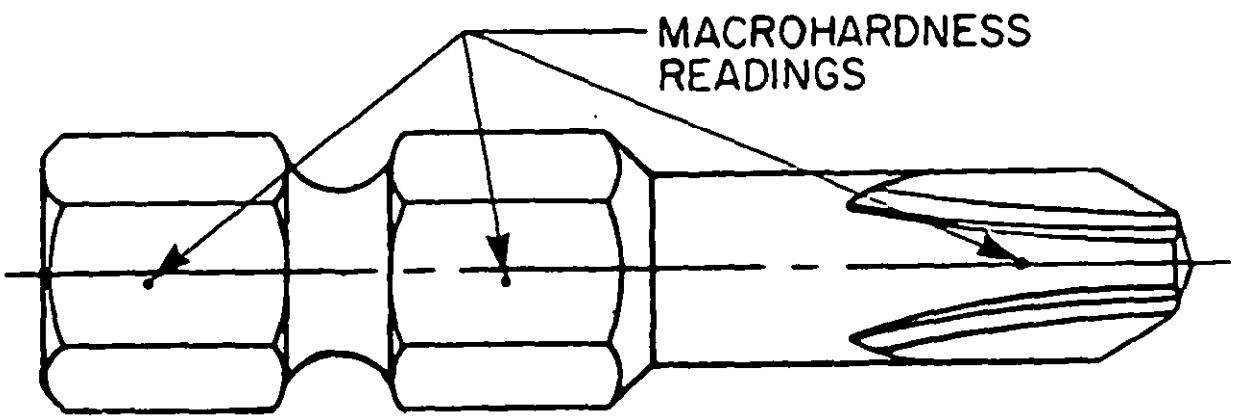


FIGURE 2. MACROHARDNESS READING LOCATIONS

Superficial hardness, Rockwell HR15N scale, 87-90 superficial hardness readings shall be taken on bid samples at two locations on sectionalized specimens along the blade.

3. Tip point: Tip point shall be in accordance with MS9006.

4. Driver bit gage: Driver bit gage shall be in accordance with NAS 7101.

5. Test block: Test block shall be in accordance with MS9006. Torque tests are conducted using this block as described herein and in MIL-B-9946.

6. Identification marking: Driver bits shall be marked by etching, stamping or engraving onto each bit the following minimum information:

   a. Military specification part number.


   b. Manufacturer's symbol or code.

   c. Country of manufacture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.

7. Part number: The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number and a code letter taken from TABLE I.

Example: M9946/18-2A-A

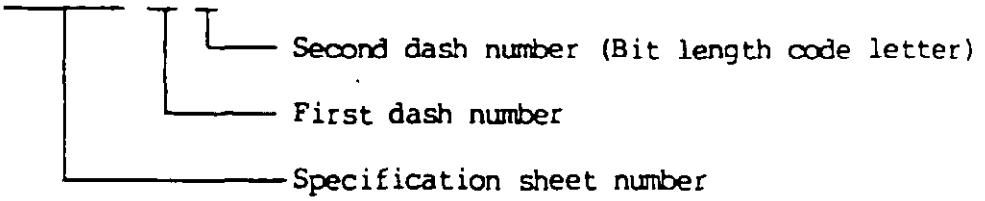

M9946/18-2A-A Indicates - Bit, Screwdriver, Phillips, Standard and Long External Hex Shank, Power Driven; Driver size 2; Recess size 2; Screw diameter size range #6, #8, #10; Bit length 1.94; Shank diameter, large.

8. Phillips is a registered trademark of Phillips Screw Company. The Government does not have a royalty-free license.

Custodians:
Army - GL
Navy - AS
Air Force - 99

Review Activities:
Army - AV
Air Force - 80
DLA - IS

User Activities:

Civil Agencies Coordinating Activities:
GSA - FSS

Preparing Activity:
Air Force - 84

Agent:
DLA - IS

(Project 5130-0310)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:15Z
Check the source to verify that this is the current version before use.