
MILITARY SPECIFICATION SHEET

BIT, SCREWDRIVER, PHILLIPS, EXTERNAL HEX SHANK, MANUALLY DRIVEN

NON-RIBBED DRIVERS WITH DASH NUMBERS 1, 2, 2A, 3, 3A AND 4A ARE NOT RECOMMENDED FOR DOD USE, SEE MIL-B-9946/15 FOR RIBBED DRIVERS IN THESE SIZES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the bits described herein shall consist of this specification and the latest issue of MIL-B-9946.

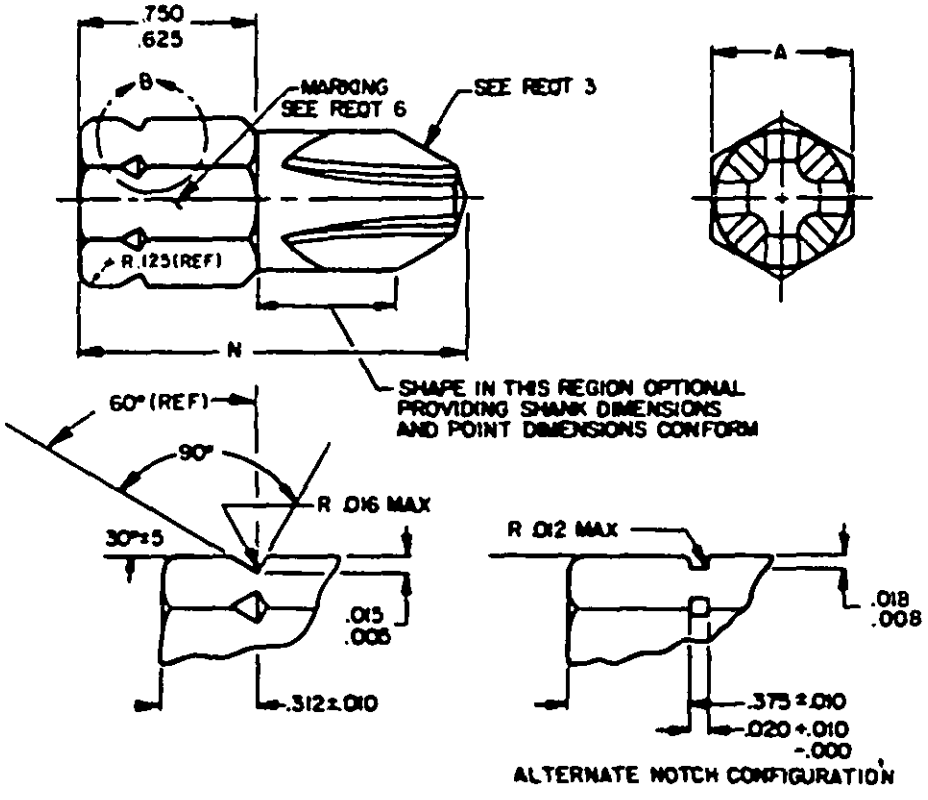

VIEW B-RETAINING GROOVE-NOTCH TYP SIX PLACES

NOTES:
1. All dimensions are in inches
2. Bit and retaining groove shall be in accordance with TABLE I.

FIGURE 1. BIT, SCREWDRIVER, PHILLIPS, EXTERNAL HEX SHANK, MANUALLY DRIVEN

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:13Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	DRIVER SIZE	RECESS SIZE	SCREW DIAMETER SIZE RANGE FOR RECESS SIZE REF	A HEX +.000 -.004	N LENGTH ±.120	ULTIMATE TORQUE MIN LBf-IN	FATIGUE TORQUE LBf-IN
0	0	0	#0, #1	.250	1.00	12	-
1	1	1	#2, #4	.250	1.00	33	17
2	2	2	#6, #8, #10	.250	1.00	90	45
2A	2	2	#6, #8, #10	.312	1.25	90	45
3	3	3	1/4	.250	1.00	325	160
3A	3	3	1/4	.312	1.25	325	160
4A	4	4	5/16, 3/8, 7/16, 1/2, 9/16	.312	1.25	500	250
5A	5	5	5/8, 3/4	.625	2.25	900	450

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Alloy Tool Steel in accordance with American Society for Testing Material (ASTM) A681, Shock-Resisting Steel, Type S-2, (UNS T41902).

2. Hardness: Macrohardness, (Rockwell C Scale) 56-62HRC. Three macrohardness readings shall be taken at the locations shown in FIGURE 2. Each hardness value must be within the range specified.

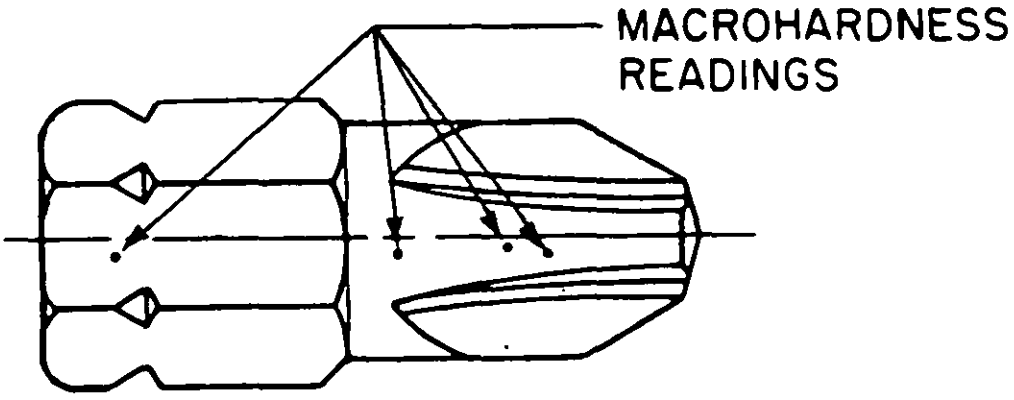


FIGURE 2. MACROHARDNESS READING LOCATIONS

Superficial hardness, (Rockwell HR15N Scale) 87-90. Superficial hardness readings shall be taken on bid samples at two locations on sectionalized specimens along the blade.

3. Tip point: Tip point shall be in accordance with NAS 7101.

4. Driver bit gage: Driver bit gage shall be in accordance with MS9006.

5. Test block: Test block shall be in accordance with NAS 7101. Torque tests are conducted using this block as described herein and in MIL-B-9946.

6. Identification marking: Driver bits shall be marked by etching, stamping or engraving onto each bit the following minimum information:

   a. Military specification part number.


   b. Manufacturer's symbol or code.

   c. Country of manufacture.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:13Z
Check the source to verify that this is the current version before use.

7. Part number: The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number taken from TABLE I.

Example: M9946/3-2A

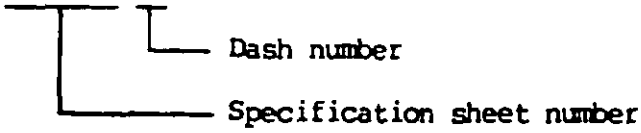

M9946/3-2A Indicates - Bit, Screwdriver, Phillips, External Hex Shank, Manually Driven; Driver size 2; Recess size 2; Screw diameter size range #6, #8, #10; Hex size .312; Length 1.25.

8. Phillips is a registered trademark of Phillips Screw Company. The Government does not have a royalty free license.

9. Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - GL
Navy - AS
Air Force - 99

Review Activities:
Army - AV
Air Force - 80
DLA - IS

User Activities:

Civil Agencies Coordinating Activities:
GSA - FSS

Preparing Activity:
Air Force - 84

Agent:
DLA - IS

(Project 5120-B058)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:13Z
Check the source to verify that this is the current version before use.