MIL-H-9890D(GL)

28 September 1973
SUPERSEDING
MIL-H-9890C
4 June 1968

MILITARY SPECIFICATION

HARDWARE, INDIVIDUAL LOAD CARRYING EQUIPMENT: AND HARDWARE, MISCELLANEOUS

1. SCOPE

1.1 Scope. This specification covers hardware for individual load carrying equipment.

* 1.2 Classification. Hardware shall be of the following types and classes as specified:

Type I - Fastener, Belt, Pistol, Female, Round Stud
Type II - Fastener, Belt, Pistol, Male, Round Stud
Type III - Fastener, Pouch, Ammunition, Male
Type IV - Fastener, Pouch, Ammunition, Female
Type V - Fastening, End, 1 inch, with Loop and Clip; Right Hand
Type VI - Fastening, End, 1 inch, with Loop and Clip; Left Hand
Type VII - Fastening, End, 1 inch, with Clip
Type VIII - Keeper, Clamp, 5/8 inch

Class A - Brass
Class B - Steel

Type IX - Keeper, Clamp, 1 inch, with Loop

Class A - Brass
Class B - Steel

Type X - Keeper, with Slide
Type XI - Keeper, Sliding, 2-5/16 inch

Class A - Brass
Class B - Steel

Type XII - Buckle, Tongueless, Double Bar, 5/8 inch, with Lip

Class A - Brass
Class B - Steel

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the current version before use.

Type XIII - Fastener, Belt, Male and Female, Aluminum
Type XIV - Buckle, 1 inch Non-Slip, Quick Release, Pack Suspenders
Type XV - Buckle, Clinch, 2-1/4 inch Adjustment, Pistol Belt

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-A-250/11	-	Aluminum Alloy 6061, Plate and Sheet
QQ-B-613	-	Brass, Leaded and Non-Leaded; Flat Products (Plate, Bar, Sheet, and Strip)
QQ-C-390	-	Copper Alloy Castings (Including Cast Bar)
QQ-S-698	-	Steel, Sheet and Strip, Low Carbon
QQ-S-700	-	Steel, Sheet and Strip, Medium and High Carbon
QQ-W-461	-	Wire, Steel, Carbon, (Round, Bare and Coated)
QQ-Z-325	-	Zinc Plating Electrodeposited, Requirements for
TT-E-529	-	Enamel, Alkyd Semigloss
* TT-P-1757	-	Primer Coating, Zinc Chromate, Low-Moisture-Sensitivity
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-621	-	Boxes; Wood, Nailed and Locked-Corner
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-B-640	-	Boxes, Fiberboard, Corrugated, Triple Wall
PPP-B-665	-	Boxes, Paperboard, Metal Stayed (Including Stay Materials)
PPP-B-676	-	Boxes, Setup

MILITARY

MIL-E-480	-	Enamel, Baking, Phenol or Urea Formaldehyde
MIL-F-495	-	Finish, Chemical, Black, for Copper Alloys
MIL-C-5541	-	Chemical Conversion Coatings on Aluminum and Aluminum Alloys
MIL-H-6088	-	Heat Treatment of Aluminum Alloys
MIL-L-10547	-	Liners, Case, and Sheet Overwrap, Water-Vaporproof or Waterproof, Flexible
* MIL-T-12879	-	Treatment, Chemical, Prepaint and Corrosion Inhibitive for Zinc Surfaces
MIL-C-13924	-	Coating, Oxide, Black for Ferrous Metals

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-151 - Metals; Test Methods

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized and Containerized Loads, 40 by 48 inch Pallets

DRAWINGS

ARMY NATICK LABORATORIES

4-1-137 - Hardware, Individual Load Carrying Equipment; Fastener, Belt, Pistol, Fastener, Pouch; AMMO; Fastening End, 1 inch, With and Without Loop; Clip; Assembly and Details
4-1-138 - Hardware, Individual Load Carrying Equipment; Keeper, Clamp, 1 inch, with Loop and Keeper, Clamp, 5/8 inch, Assembly and Details
4-1-139 - Hardware, Individual Load Carrying Equipment: Keeper, with Slide, Assembly, Keeper, Sliding, 2-5/16 inch, and Buckles, Tongueless, Double Bar, 5/8 inch with Lip
4-1-231 - 1 inch Non-Slip, Quick Release Buckle Assembly with Spring
4-1-443 - Hardware, Individual Load Carrying Equipment: Fastener, Belt, Male and Female
4-1-453 - Buckle, Clinch, Adjustment, 2-1/4, Assembly

(Miniature copies of Drawings 4-1-137, 4-1-138, 4-1-139, 4-1-231, 4-1-443, and 4-1-453 identified as figures 1 through 6, respectively, are attached for information purposes only.)

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the currentversion before use.

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.3 and 6.4).

* 3.2 Materials and components. Materials and components shall be as specified herein and on the applicable drawings. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial fastener, keeper or buckle provided the completed item complies with all provisions of this specification.

* 3.2.1 Brass.

3.2.1.1 Castings. Brass castings shall conform to alloy No. A1, A3 or B5 of QQ-C-390.

* 3.2.1.2 Sheet or strip. The brass sheet or strip shall conform to alloy 260 or 268, quarter-hard, of QQ-B-613.

3.2.2 Steel.

3.2.2.1 Steel wire. The steel wire shall conform to steel number 1006-1010, finish 1, hard temper of QQ-W-461.

3.2.2.2 Sheet or strip (low carbon). The sheet shall conform to HRCQ or CRCQ of QQ-S-698. The strip shall be hot rolled commercial quality or cold rolled No. 2 or 3 temper of QQ-S-698.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the current version before use.

3.2.2.3 Sheet or strip (medium carbon). The sheet or strip shall conform to steel numbers 1025-1050 of QQ-S-700.

3.2.2.4 Aluminum alloy. Aluminum alloy shall conform to 6061-0 of QQ-A-250/11.

* 3.3 Construction. The hardware shall be constructed in accordance with Drawings 4-1-137, 4-1-138, 4-1-139, 4-1-231, 4-1-443 and 4-1-453 as applicable, and as specified herein.

3.3.1 Types I and II hardware. The types I and II hardware shall be cast from alloy specified in 3.2.1.1.

3.3.2 Types III and IV hardware. The loops for the types III and IV hardware shall be formed of steel wire as specified in 3.2.2.1. The clips shall be stamped from steel as specified in 3.2.2.2.

* 3.3.3 Types V, VI and VII hardware. The loops for the types V, VI and VII hardware shall be stamped from steel as specified in 3.2.2.3. After forming, the loops shall be heat treated to the hardness specified on Drawing 4-1-137. Testing for hardness shall be as specified in table I. The clips for the types V, VI, and VII hardware shall be stamped from steel as specified in 3.2.2.2, or from alloy as specified in 3.2.1.2.

3.3.4 Types VIII and IX hardware. The body and latch of the type VIII and type IX hardware shall be stamped from steel as specified in 3.2.2.2 or alloy as specified in 3.2.1.2 (see 1.2).

3.3.5 Type X hardware. The keeper, body, and slide for the type X hardware shall be stamped from steel as specified in 3.2.2.3 and heat treated to the hardness specified on Drawing 4-1-139. Testing for hardness shall be as specified in table I. The hardware shall be assembled so that the force to open the slide from the closed position shall be from 2 to 8 pounds when tested as specified in 4.4.1.

3.3.6 Types XI and XII hardware. The types XI and XII hardware shall be stamped from steel as specified in 3.2.2.2 or alloy as specified in 3.2.1.2 (see 1.2).

3.3.7 Type XIII hardware. The type XIII hardware shall be stamped from aluminum as specified in 3.2.2.4 and after forming heat treated to temper T-4 in accordance with MIL-H-6088.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the currentversion before use.

* 3.3.8 Type XIV, hardware. The type XIV hardware shall be stamped and cast from material specified on Drawing 4-1-231.

* 3.3.9 Type XV, hardware. The type XV hardware shall be stamped from material specified on Drawing 4-1-453.

3.4 Finish. Any welding or brazing required shall be completed prior to the finish operation. Components of the type X hardware shall be finished prior to assembly.

3.4.1 Brass hardware. The brass hardware shall be given a black chemical finish conforming to MIL-F-495.

3.4.2 Steel hardware.

* 3.4.2.1 Steel, carbon. The carbon steel hardware, shall be given a phosphate treated zinc plate conforming to type III, class 2 of QQ-Z-325, followed by bake enameling. The bake enamel shall conform to types I or II of MIL-E-480. The color shall be black.

* 3.4.2.2 Steel, corrosion resistant. The finish for CRES (stainless) components of types XIV and XV shall be a black oxide coating in accordance with class 2, 3 or 4 of MIL-C-13924.

* 3.4.3 Aluminum hardware. All surfaces of the aluminum hardware shall be given a chemical treatment conforming to class 1a of MIL-C-5541. After the chemical treatment, all treated surfaces shall be coated with primer conforming to composition G or L, as applicable, and color Y of TT-P-1757, followed by bake enameling. The enamel shall conform to type I or II of MIL-E-480 or class B of TT-E-529. The color shall be black.

* 3.4.4 Zinc alloy. The alternate zinc alloy allowed on Drawing 4-1-231 for the tongue component of type XIV shall be finished as follows: Zinc surfaces shall be prepared for painting in accordance with type I, class 1 requirements of MIL-T-12879. Primer and black enamel coating shall be as specified in 3.4.3 for aluminum surfaces.

3.5 Marking for identification. All hardware shall be marked with the manufacturer's identification. The identification marks shall be incorporated in such a manner that the surfaces opposite those markings shall show no signs of penetration or unevenness or cause distortion in any part of the hardware.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

* 3.6 Workmanship. The finished hardware shall be free from dirt and other harmful extraneous material. The coating shall level out to a smooth and uniform film without orange peel, wrinkles, drops, streaks or areas of no film.

3.6.1 Stampings. The stampings shall be clean, smooth, and free from cracks, burrs, drag, step, and rough edges.

3.6.2 Castings. The castings shall be smooth and free from blowholes, porosity, cracks, and shrinkage.

3.6.3 Welds. Where welding is required, the welds shall be sound, smooth, and free from porosity, holes, fissures, and burns or reduced areas.

3.6.4 Brazing. When brazing is required, brazing shall be complete, smooth, and uniform. All flux deposits shall be removed.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article. When a first article is required, the fastener, keeper or buckle shall be examined for defects listed in table II, dimensions specified and tested as specified in 4.4.1. The presence of any defect or failure of test shall be cause for rejection of first article.

4.3 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the current version before use.

4.3.2 In-process inspection.

* 4.3.2.1 In-process examination. Examination shall be made to determine that the following are as specified. Whenever nonconformance is noted, correction shall be made to the item affected and process.

Requirement operation	Paragraph
a. Phosphate treated zinc plate	3.4.2.1
b. Chemical treatment	3.4.3
c. Primer coat	3.4.3
d. Heat treatment	3.3.7
e. Finish prior to assembly (type X)	3.4
f. Zinc alloy preparation and primer coat	3.4.4

4.3.2.2 Intermediate testing. Testing of the fabricated components of types V, VI, VII, and X hardware shall be performed in accordance with table I for the characteristics shown therein. The sample unit for types V, VI, and VII hardware shall be one loop of each type. The sample unit for type X hardware shall be one of each, keeper, body, and slide. Testing of the hardware shall be accomplished prior to the finish and assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the current version before use.

TABLE I. Instructions for testing

Component and unit of product	Characteristics	Requirement reference	Test method	Requirements applicable to: Individ Unit	Requirements applicable to: Lot Aver	Number determinations per sample unit	Results reported as	Sample unit	Inspect level	AQL
Types V, VI and VII hardware (loops)	Hardness Rockwell C36-44	Drawing 4-1-137	Method 243 FED-STD-151	X	--	3	Average of 3 determinations to nearest Rockwell hardness number	1	S-2	6.5
Type X hardware (keeper)	Hardness Rockwell 15N-74-83	Drawing 4-1-139	Method 243 FED-STD-151	X	--	3	Average of 3 determinations to nearest Rockwell hardness number	1	S-2	6.5
(Body)	Hardness Rockwell C35-45	Drawing 4-1-139	Method 243 FED-STD-151	X	--	3	Average of 3 determinations to nearest Rockwell hardness number	1	S-2	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

TABLE I. Instructions for testing (cont'd)

Component and unit of product	Characteristics	Requirement reference	Test method	Requirements applicable to: Individ Unit	Requirements applicable to: Lot Aver	Number determinations per sample unit	Results reported as	Sample unit	Inspect level	AQL
Type X hardware (cont'd) (Slide)	Hardness Rockwell C35-45	Drawing 4-1-139	Method 243 FED-STD-151	X	--	3	Average of 3 determinations to nearest Rockwell hardness number	1	S-2	6.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

4.3.3 End item inspection. The lot shall be all hardware of one type and class offered for inspection at one time.

4.3.3.1 Visual examination. Examination of the hardware shall be in accordance with the defects in table II. The inspection level shall be II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE II. Classification of defects

Examine	Defect	Classification Major	Minor
Finish	Not black chemical or enamel finished as applicable	X	
	Area of no film	X	
	Finish not adherent, orange peel		X
	Wrinkles, drops, or streaks		X
Design	Component not formed as specified in applicable drawings, e.g., fastening end, 1 inch, with loop, does not conform to design shown, or clip for fastener, pouch, ammunition, female is not formed to shape as specified in Drawing 4-1-137	X	
Construction and workmanship	Not properly assembled	X	
	Any part missing	X	
	Fractured, split, bent, dented, sprung, or malformed	X	
	Any sharp burr, sliver, or sharp edge	X	
	Holes in hardware missing where required	X	
	Holes in hardware misplaced or out of alignment, affecting assembly	X	
	Holes, in hardware too large or too small	X	
	Keeper clamp latch cannot be operated by thumb without the aid of a tool		X
	Keeper clamp latch requires no force or slight force to operate	X	
	NOTE: Opening of latch of keeper, clamp becomes easier with repeated operations. Tight fit is preferred, provided it can be operated by thumb.		

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Construction and workmanship (cont'd)	Slide cannot be operated	X	
	Slide is too loose, i.e., will operate without moderate push or pull		X
	Slide tip contacts any portion of the slot in the body end while activating the slide	X	
Welding and brazing	Missing, fissures, burns, holes, or reduced areas	X	
	Incomplete, porous		X
	Not smooth and uniform, or scale or flux deposits not removed	X	
	Loops not welded or brazed to clips where required	X	
Identification markings	Missing, incomplete, illegible, or incorrect		X
	Not stamped or etched on hardware as specified		X
	Indication of penetration, unevenness, or distortion marking on hardware		X

4.3.3.2 Dimensional examination. The hardware shall be examined for compliance with dimensions specified. Any dimension not within this specification tolerance shall be a defect. The inspection level shall be S-2 with an AQL of 4.0 defects expressed in terms of defects per hundred units.

4.3.3.3 Testing of the end item. Testing of the fabricated hardware shall be performed in accordance with table III for the characteristics shown therein. The sample unit shall be one completely fabricated unit of hardware. The inspection level shall be S-1 with an AQL of 6.5, expressed in terms of defects per hundred units for each characteristic.

Source: https://assist.dla.mil -- Downloaded: 20260-17T13:09Z
Check the source to verify that this is the current version before use.

TABLE III. Testing of the end product

Characteristics	Requirement paragraph	Test method	Number determinations per sample unit	Results reported as
Black chemical finish:				
Color and gloss	3.4.1	MIL-F-495	1	Pass or fail
Resistance to hot soap solution	3.4.1	MIL-F-495	1	Pass or fail
Resistance to accelerated weathering	3.4.1	MIL-F-495	1	Pass or fail
Force to start slide (applicable to type X hardware)	3.3.5	4.4.1	1 (after the first cycle)	Nearest 1.0 ounce

4.3.4 Examination of preparation for delivery. An examination shall be made to determine that the packaging, packing, and marking, as required by section 5 of this specification, are complied with. Defects shall be scored as specified in table IV. The sample unit shall be one shipping container fully prepared for delivery, with the exception that it need not be sealed. The lot shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units. Examination for closure and strapping shall be in accordance with the applicable container specification.

TABLE IV. Examination of preparation for delivery

Examine	Defect
Marking (exterior and interior containers)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Material	Component missing, damaged or otherwise defective
Contents (exterior and interior containers)	Number per container is more or less than required

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

4.3.5 Examination of palletization. An examination shall be made to determine that palletization is in compliance with section 5 of this specification. Defects shall be scored as specified in table V. The sample unit for this examination shall be one palletized unit load ready for shipment. The lot shall be the number of palletized unit loads submitted for inspection at one time. The inspection level shall be S-1 with an AQL of 6.5 expressed in terms of defects per hundred units.

TABLE V. Examination of palletization

Examine	Defect
Finished dimension	Length, width, or height exceeds specified maximum requirement
Palletization	Not as specified Container pattern not as specified Interlocking of loads not as specified Load not bonded with required straps as specified
Weight	Exceeds maximum load limit
Marking	Omitted; incorrect; illegible; of improper size, location, sequence or method of application

4.4 Tests.

4.4.1 Force test. The force test may be applied by means of a spring balance or any force measuring device in accordance with the manufacturer's standard practice.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Unless otherwise specified (see 6.2) hardware of one type and class only shall be packaged in the quantities specified in table VI in a snug-fitting fiberboard box conforming to style RSC, type CF or SF, class domestic, grade 200 of PPP-B-636. When quantities per package other than those in table VI are specified, hardware shall be packaged in boxes conforming to PPP-B-566, PPP-B-665, PPP-B-675 or PPP-B-636. Each box shall be

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the current version before use.

agitated from time to time to assure a compact and well-filled box. Closure shall be in accordance with the appendix of the box specification. When specified (see 6.2), boxes conforming to style RSC, type CF or SF, class weather resistant Grade W5c or W6c of PPP-B-636, closed and waterproofed in accordance with the appendix thereto, shall be used.

TABLE VI. Packaging and packing of hardware

Type and class of hardware	Quantity per package	Quantity per shipping container
Type I	350	2100
Type II	300	1800
Type III	1300	7800
Type IV	1000	6000
Type V	600	3600
Type VI	600	3600
Type VII	800	4800
Type VIII		
Class A	700	4200
Class B	700	4200
Type IX		
Class A	400	2400
Class B	400	2400
Type X	400	2400
Type XI		
Class A	800	4800
Class B	800	4800
Type XII		
Class A	1750	10,500
Class B	2000	12,000
Type XIII	100	1,000
Type XIV	300	1800
Type XV	300	1800

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Hardware shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Unless otherwise specified (see 6.2), hardware of one type and class only, packaged as specified in 5.1, shall be packed in the quantities specified in table VI in snug-fitting fiberboard shipping containers conforming to style FTC, V2s of PPP-B-636, except that weight limitation shall be waived and the inside dimensions of the container (length, width and depth added) shall not exceed 48 inches; or a nailed wood shipping container conforming to class 2, style 2 of PPP-B-621. When quantities per shipping container other than those in table VI are specified, hardware shall be packed in snug-fitting shipping containers conforming to style RSC, class weather-resistant Grade V2s of PPP-B-636, or class 2 of PPP-B-621, in accordance with the weight limitation of the specification. Each fiberboard shipping container shall be waterproofed, closed, and reinforced with flat strapping or tape banding in accordance with PPP-B-636. Each wood shipping container shall be provided with the type I or II, grade C case liner conforming to MIL-L-10547 and closed and strapped in accordance with PPP-B-621. When hardware is packaged in boxes conforming to W5c or W6s as specified in 5.1.1 waterproofing will not be required.

* 5.2.2 Level B. Unless otherwise specified (see 6.2), hardware of one type and class only, packaged as specified in 5.1, shall be packed in the quantities specified in table VI in a snug-fitting fiberboard shipping container conforming to style FTC, type CF, class domestic, variety DW, grade 350 of PPP-B-636 or class 1 of PPP-B-640, except that weight limitation shall be waived and the inside dimensions of the container (length, width and depth added) shall not exceed 48 inches; or a nailed wood shipping container conforming to class 1, style 2 of PPP-B-621. When quantities per shipping container other than those in table VI are specified, hardware shall be packed in snug-fitting shipping containers conforming to style RSC, class domestic of PPP-B-636, class 1 of PPP-B-621, or class 1 of PPP-B-640 in accordance with the weight limitation of the specification. Closure shall be in accordance with the appendix of the container specification.

* 5.2.2.1 When specified (see 6.2) the shipping container shall be V3c, V3s, or V4s, fabricated and closed in accordance with PPP-B-636.

* 5.2.3 Level C. Hardware, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:09Z
Check the source to verify that this is the current version before use.

at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

* 5.3 Marking. In addition to any special marking required by the contract or order, interior packages, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129.

* 5.4 Palletization. When specified (see 6.2), hardware packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern intended to be used shall be submitted to and approved by the contracting officer.

6. NOTES

6.1 Intended use. This specification covers hardware intended to be used on individual load carrying equipment.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type and class (when applicable) of hardware required (see 1.2).
(c) When a first article is required (see 3.1, 4.2 and 6.4).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) If quantity of hardware per package and shipping container differ from the specified in table V (see 5.1.1, 5.2.1, and 5.2.2).
(f) When weather-resistant containers are used for packaging and packing (see 5.1.1 and 5.2.2.1).
(g) When palletization is required (see 5.4).

6.3 The margins of this specification have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

* 6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Custodians:

Army - GL

Review activities:

Army - AV
Other - IS

User activity:


Army - ME

Preparing activity:


Army - GL

Project No. 5340-0872


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

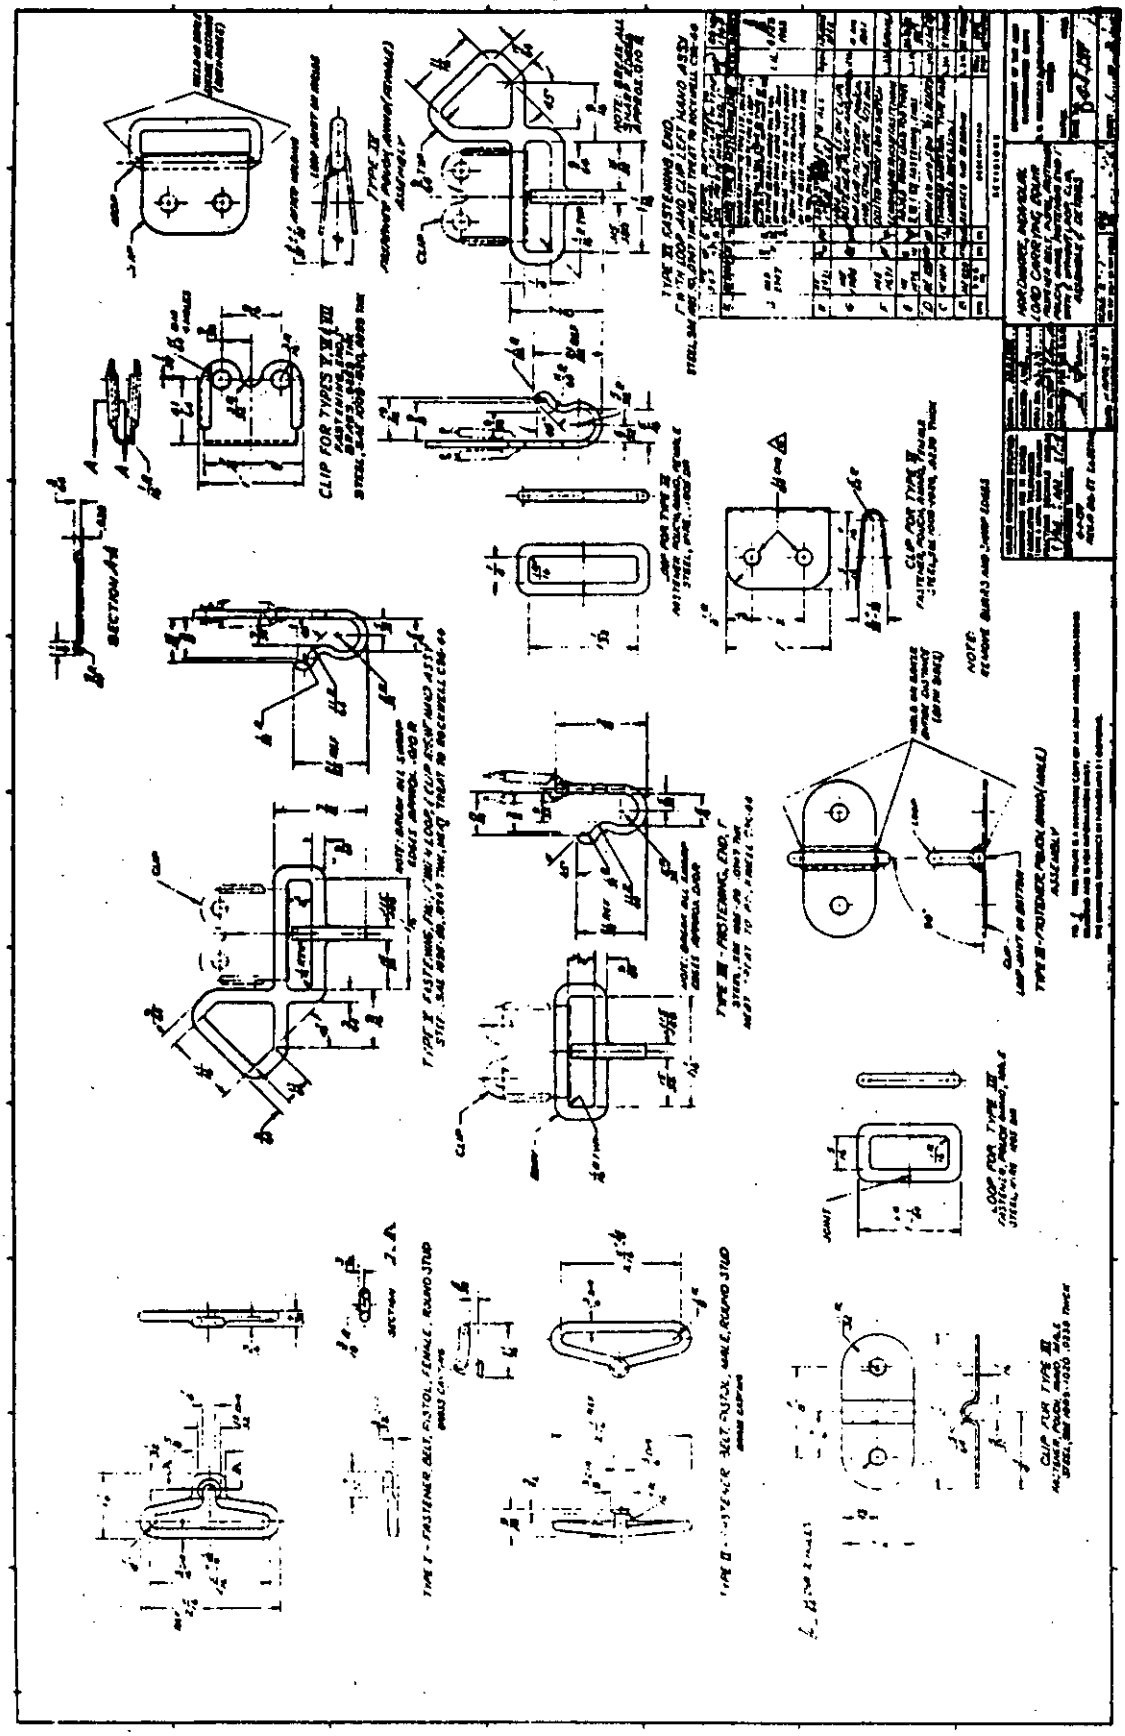


Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the current version before use.

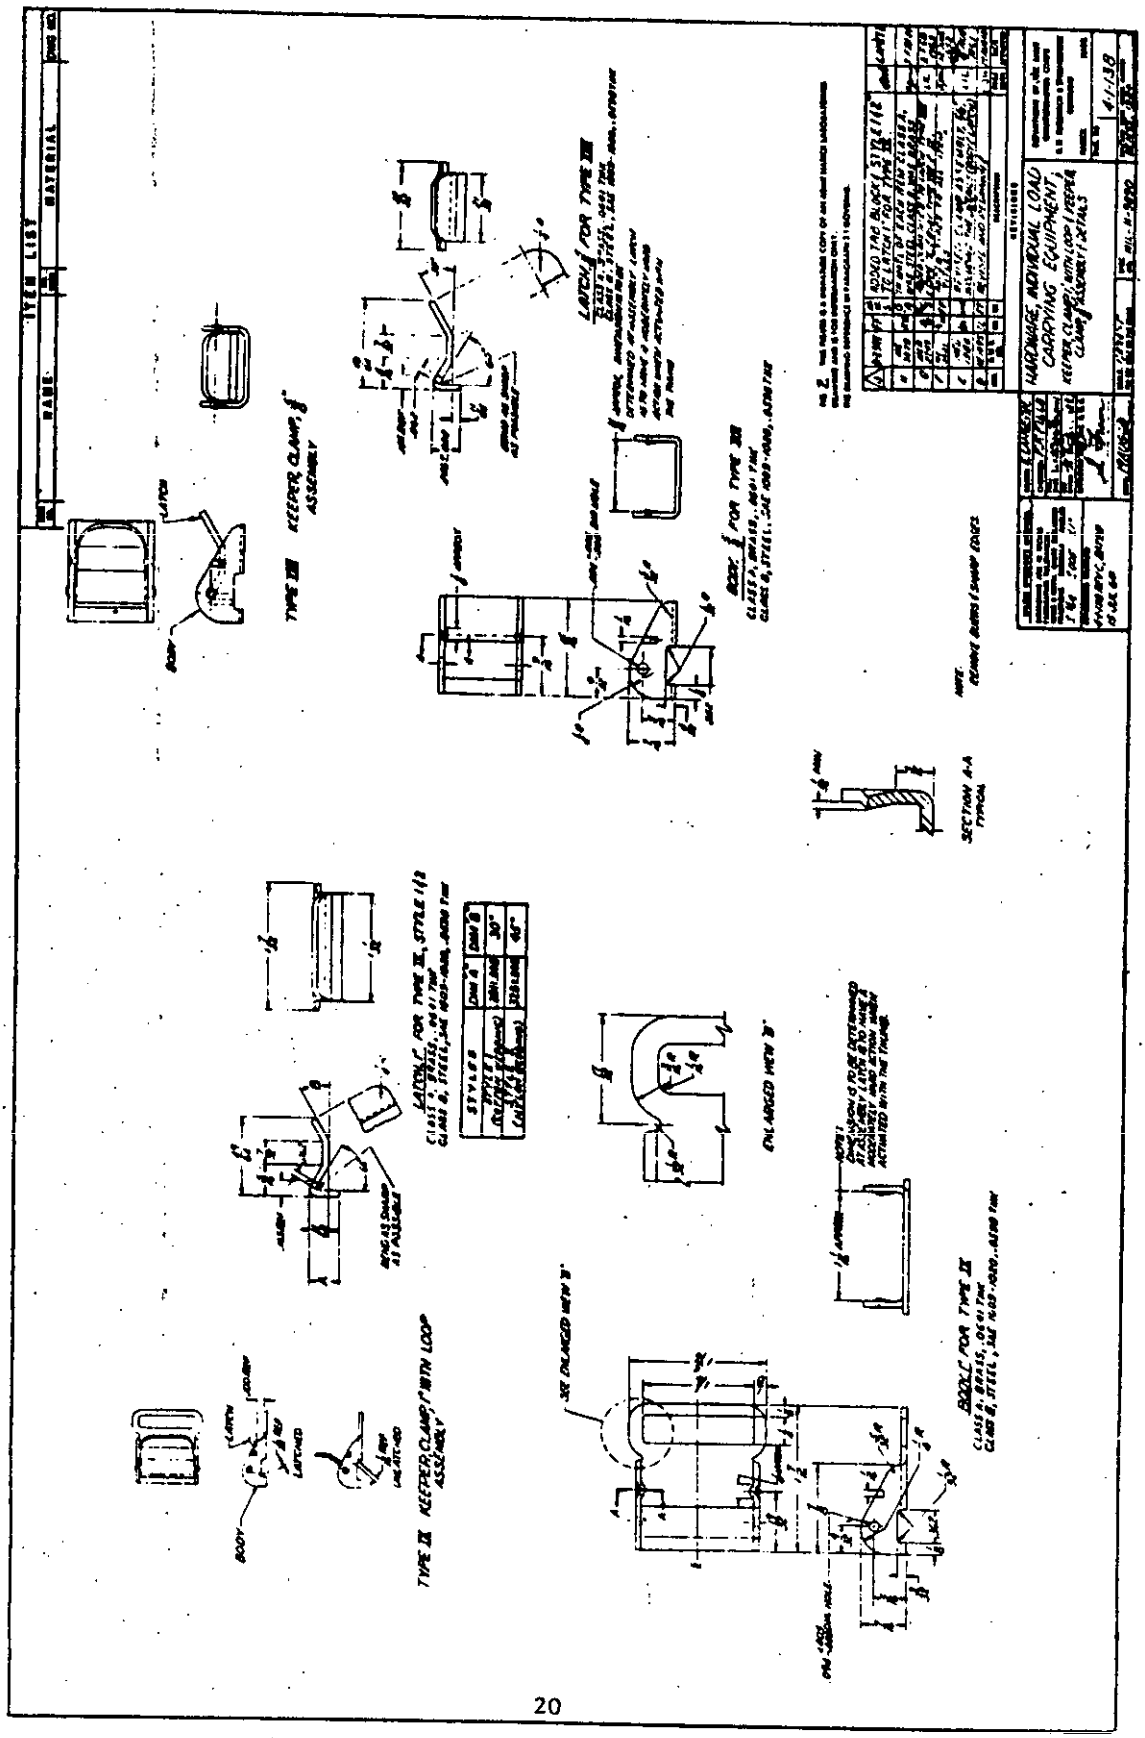


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

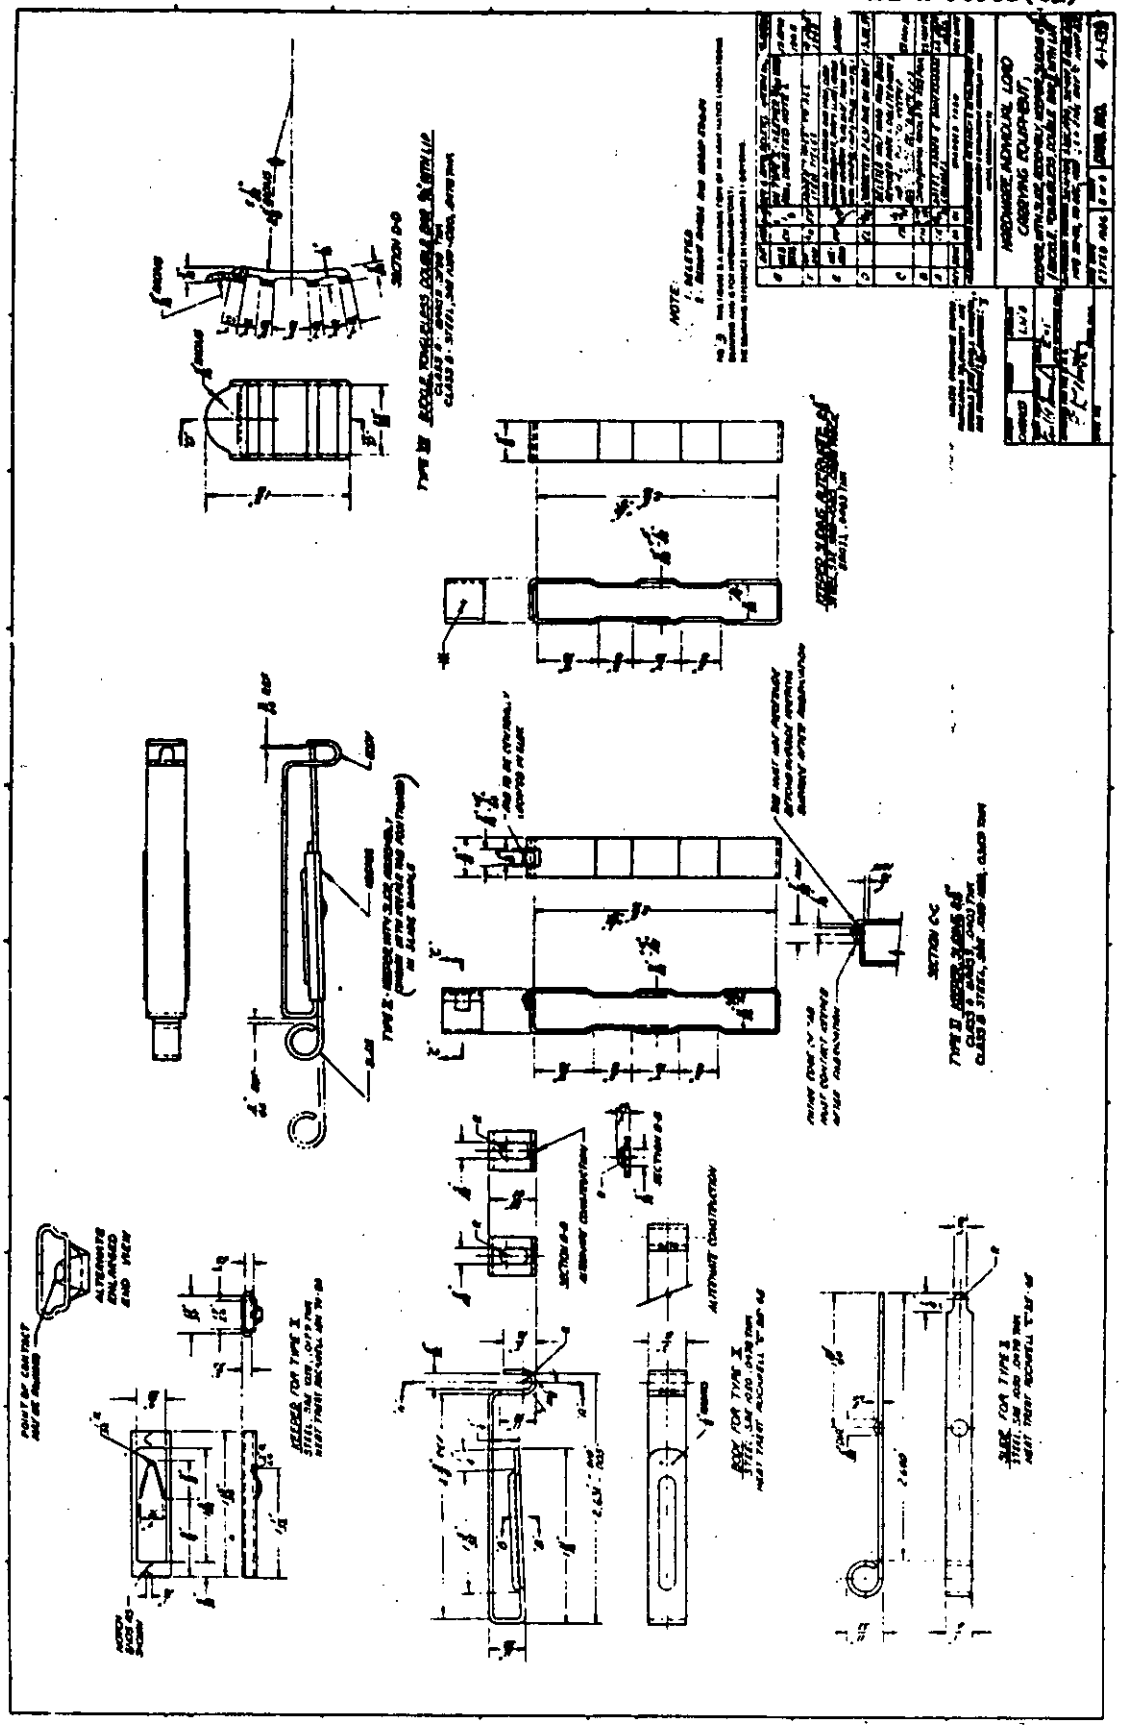


Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the current version before use.

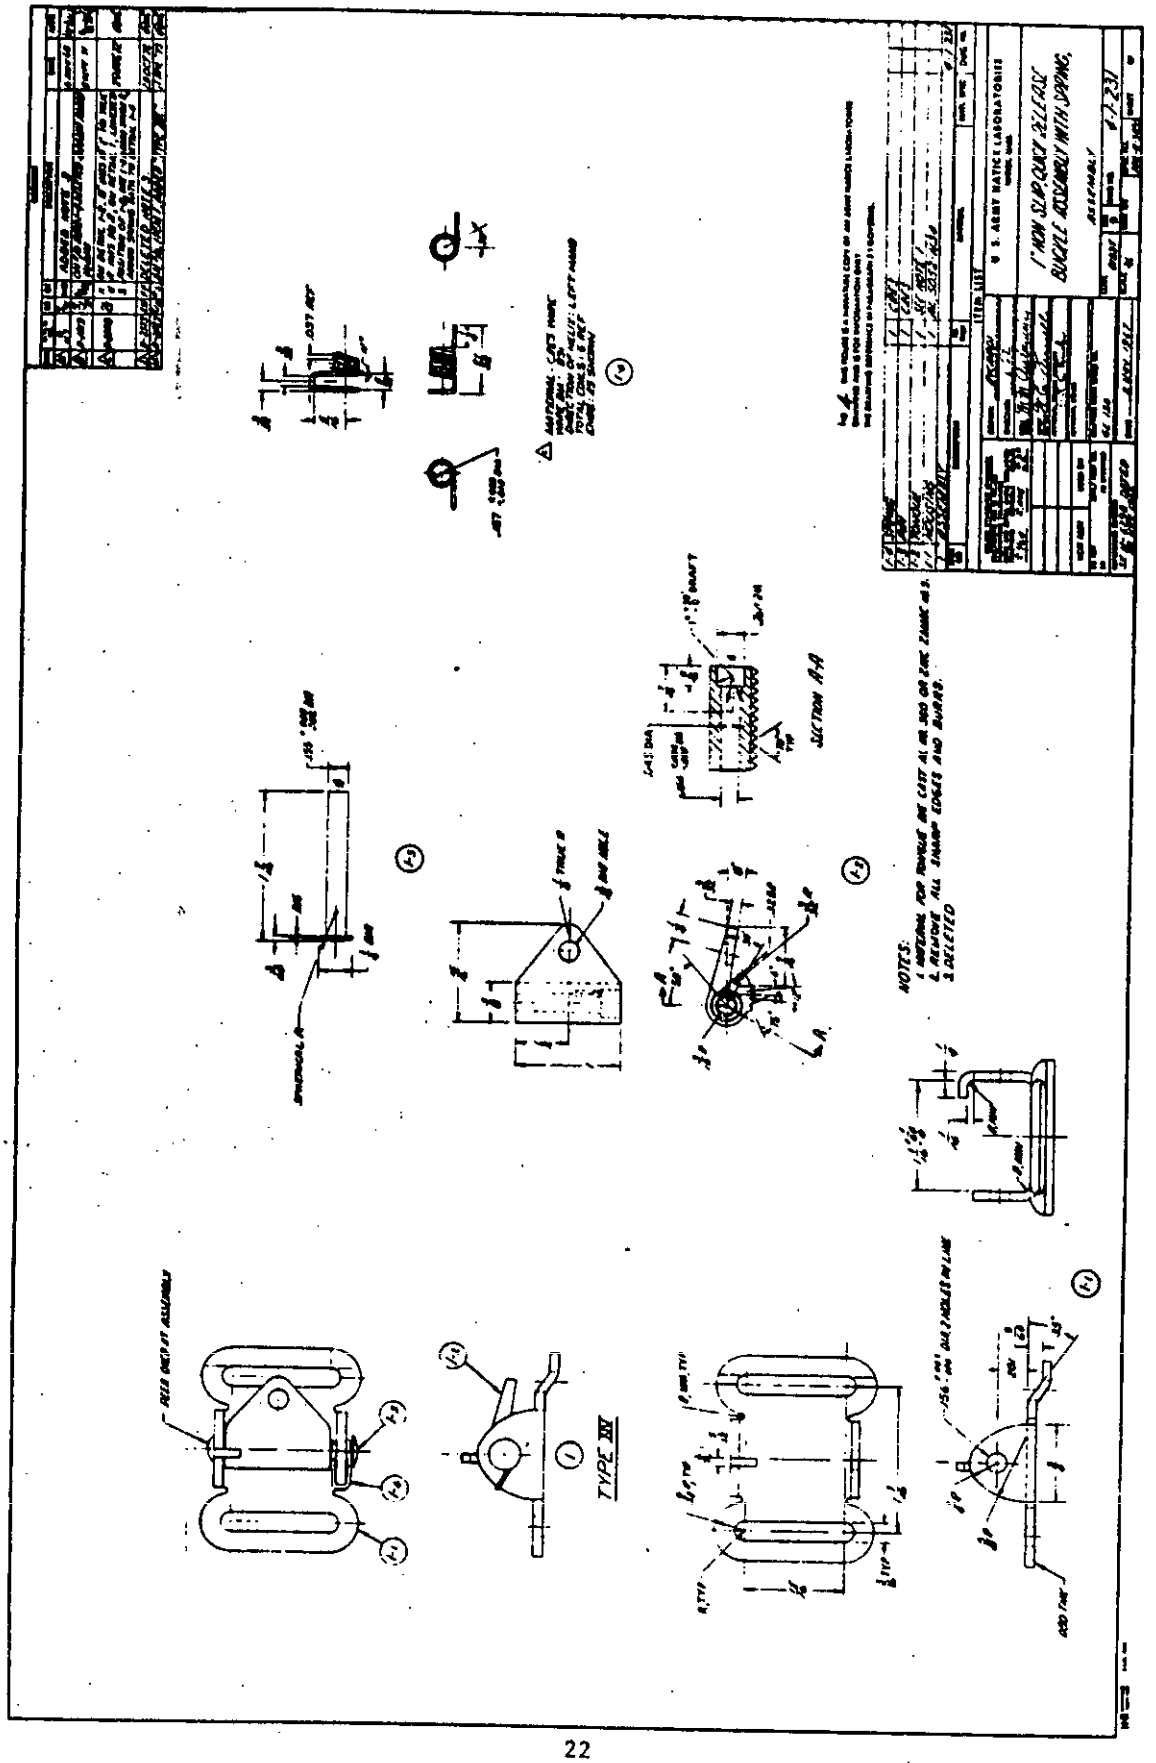

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

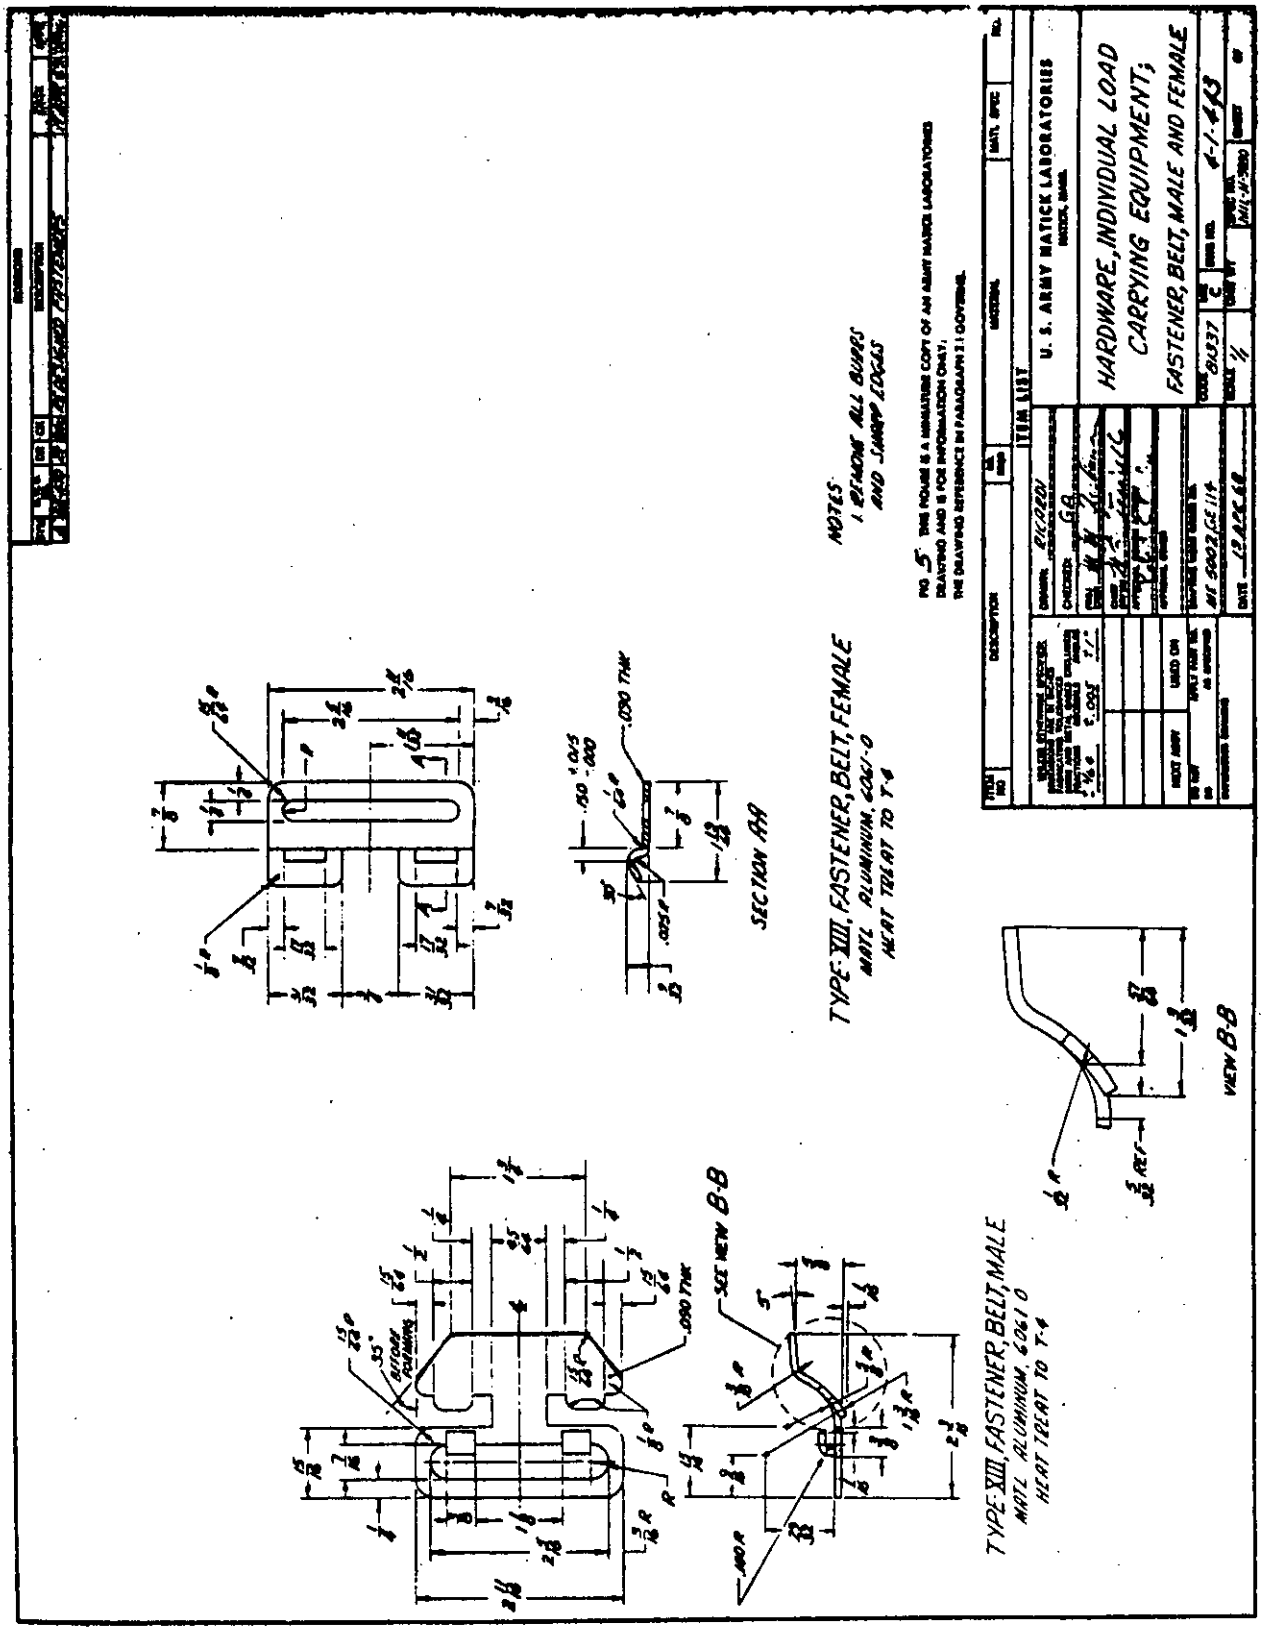

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:09Z
Check the source to verify that this is the current version before use.

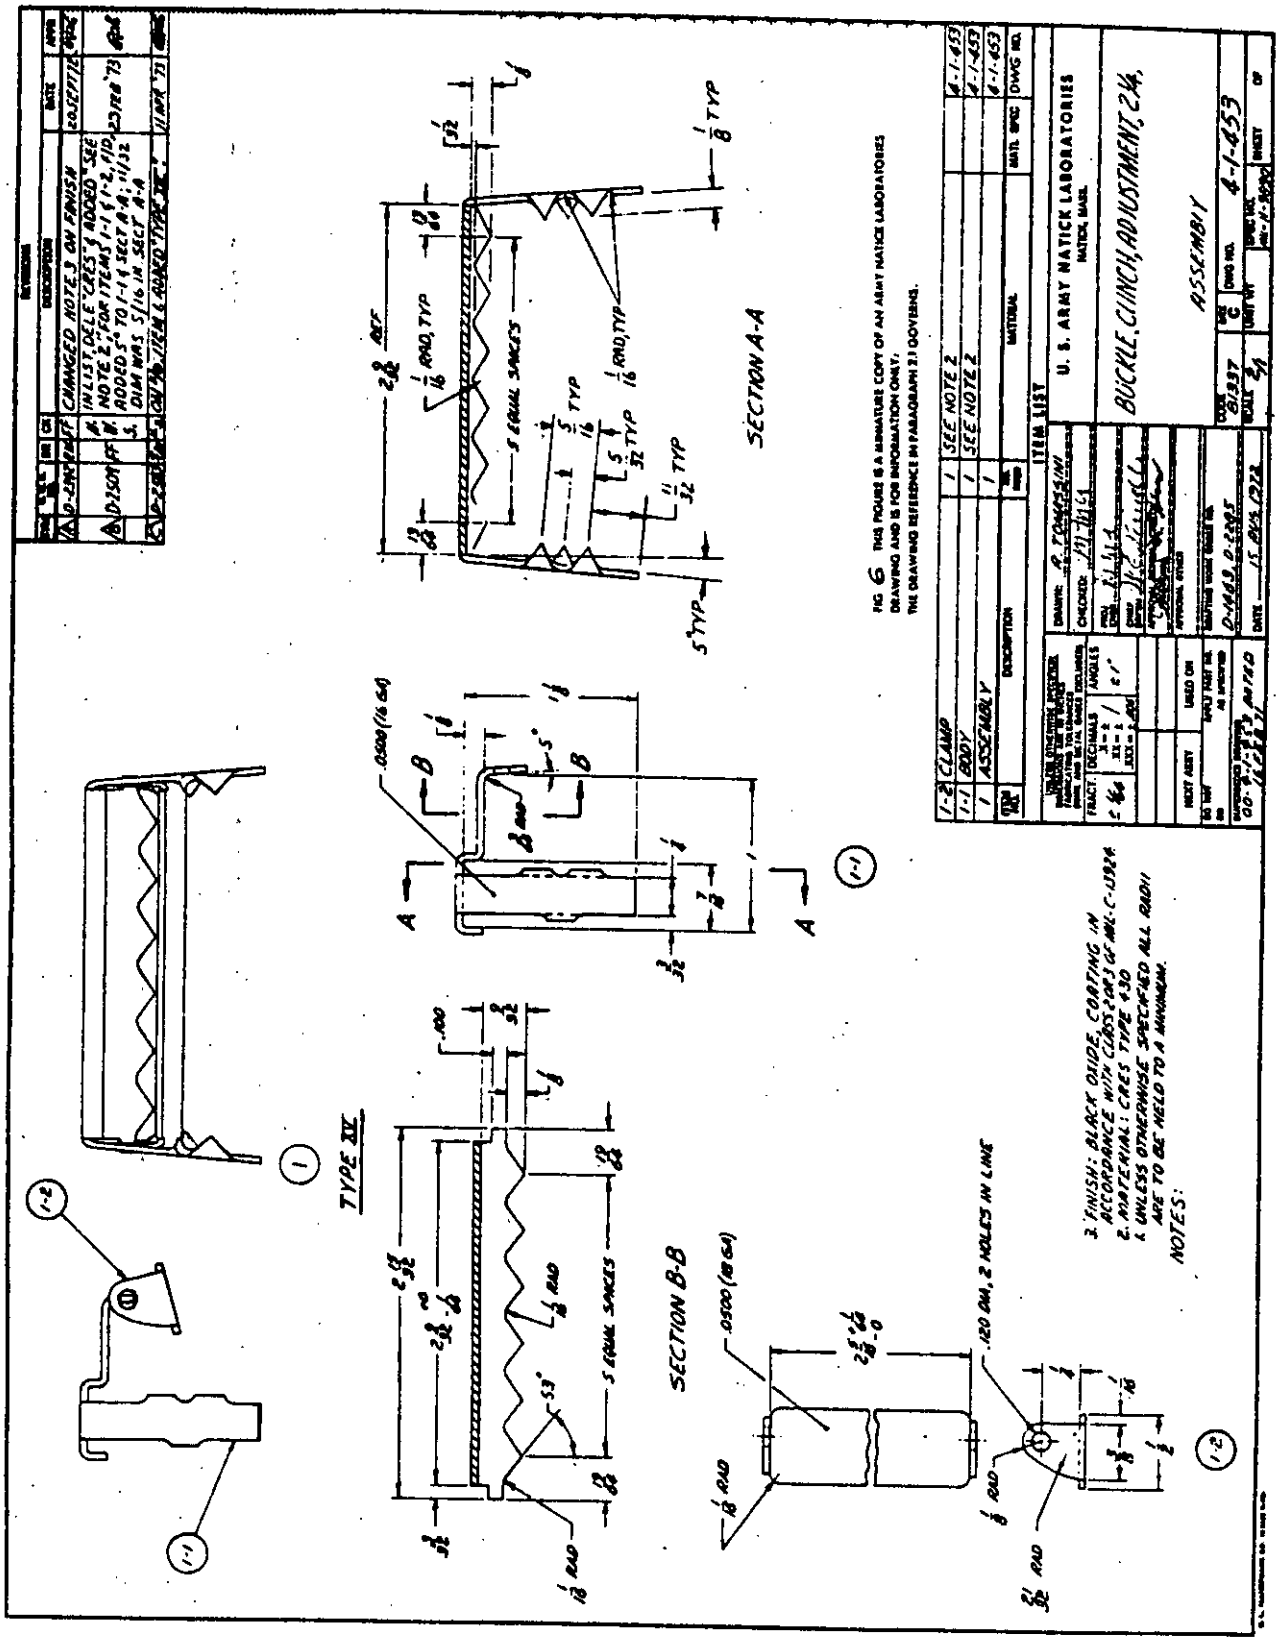

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:09Z
Check the source to verify that this is the current version before use.