MILITARY SPECIFICATION

HARDWARE, UNIVERSAL LOAD CARRYING SLING

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope.- This specification covers hardware for the universal, individual load carrying sling.

1.2 Classification.- Hardware shall be of the following types as specified (see 6.2).

Type I - Buckle, quick adjustable slide, 1-3/4 inches
Type II - Buckle, quick adjustable slide, 1-3/4 inches, with eye and attached snap
Type III - Loop, slide, 1-3/4 inches
Type IV - Ring, V, with bar, 1-3/4 inches

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

NN-P-530	-	Plywood, Flat-Panel
QQ-A-250/8	-	Aluminum Alloy 55052, Plate and Sheet
QQ-W-470	-	Wire, Steel, High Carbon, Spring, Bright, Music
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings
TT-P-666	-	Primer Coating, Zinc Yellow, for Aluminum and Magnesium Surfaces
PPP-B-566	-	Boxes, Folding, Paperboard
PPP-B-601	-	Box, Wood, Cleated-Plywood
PPP-B-621	-	Box, Wood, Nailed and Lock-Corner
PPP-B-636	-	Box, Fiberboard

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:10Z
Check the source to verify that this is the current version before use.

PPP-B-655 - Boxes, Paperboard, Metal Stayed (Including Stay Material)
PPP-B-676 - Boxes, Set-Up, Paperboard

MILITARY

MIL-M-3171 - Magnesium Alloy, Processes for Pretreatment and Prevention of Corrosion On
MIL-C-5541 - Chemicals Films and Chemical Film Materials for Aluminum and Aluminum Alloys
MIL-R-5674 - Rivets, Aluminum and Aluminum Alloy

STANDARDS

FEDERAL

Fed. Test Method Std. No. 141 - Paint, Varnish, Lacquer, and Related Materials, Methods of Inspection, Sampling and Testing

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWINGS

ARMY NATICK LABORATORIES

4-1-190 - Hardware, Universal Load Carrying Sling; buckle, Quick Adjustable, Slide 1-3/4 Inches with Eye and Attached Snap, Buckle, Quick Adjustable Slide, 1-3/4 Inches
4-1-191 - Hardware, Universal Load Carrying Sling, Slide, Quick Adjustable, 1-3/4 Inches (Magnesium)
4-1-192 - Hardware, Universal Load Carrying Sling; Ring "V" with Bar, 1-3/4 Inches, Loop Slide, 1-3/4 Inches
4-1-193 - Hardware, Universal Load Carrying Sling; Snap, Round Eye, 1/2 Inch Diameter for Type II Buckle
4-1-194 - Hardware, Universal Load Carrying Sling; Method of Testing
4-1-435 - Hardware, Universal Load Carrying Sling, Alternate Type I and Type II Buckle Assembly, 1-3/4 Inch, Aluminum Slide

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:10Z
Check the source to verify that this is the current version before use.

(Miniature copies of Drawings 4-1-190, 4-1-191, 4-1-192, 4-1-193, 4-1-194 and 4-1-435, identified as figures 1 through 6 respectively, are attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following document forms a part of the specification to the extent specified herein. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING MATERIALS STANDARDS

B94-58 Standard Specification for Magnesium-Alloy Die Castings

(Application for copies should be addressed to the American Society for Testing Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

3. REQUIREMENTS

3.1 Preproduction sample.- When specified (see 6.2), before production is commenced, a sample of the finished specified hardware covered by this specification shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production hardware.

3.2 Material.- The material specified shall conform to the referenced specifications and requirements specified hereinafter.

3.2.1 Magnesium alloy die-castings.- Magnesium alloy die-castings shall conform to alloy AZ91B of American Society of Testing Material Standard ASTM B94-58.

3.2.2 Aluminum alloy sheet.- Aluminum alloy sheet shall conform to temper 5052-H32 of QQ-A-250/8.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:10Z
Check the source to verify that this is the current version before use.

3.2.3 Wire, steel.- The steel wire shall be high carbon, spring, bright, music, conformimg to QQ-W-470.

3.2.4 Rivets, aluminum alloy.- The aluminum alloy rivets shall conform to composition 5056, condition H-32 of MIL-R-5674.

3.2.5 Primer.- The primer shall conform to TT-P-666.

3.2.6 Enamel.- The enamel shall be baked urea resin modified epoxy type, pigmented with carbon black and ultra fine silica (see 6.3). The color shall be black.

3.2.6.1 Resistance to abrasion.- The abrasion loss shall not be more than 25 milligrams when calibrase wheels apply a pressure of 1000 grams against the film for 500 cycles as specified in test of 4.4.1.

3.3 Construction.- The construction of the hardware shall conform to the requirements specified herein, and to the design, size, and dimensions of Drawings 4-1-190, 4-1-191, 4-1-192 and 4-1-193. At the option of the supplier, for types I and II hardware, an alternate one-piece aluminum slide conforming to 3.3.3 may be substituted for the magnesium slide specified on Drawing 4-1-191.

3.3.1 Types I, III and IV hardware.- The types I, III and IV hardware shall be cast from magnesium specified in 3.2.1, except for aluminum slide when applicable (see 3.3 and 3.3.3).

3.3.2 Type II hardware.- The type II hardware, shall be cast from magnesium specified in 3.2.1 except for the snap tongue (see 3.3.2.1), snap spring (see 3.3.2.2), and aluminum slide when applicable (see 3.3 and 3.3.3).

3.3.2.1 Snap tongue for type II hardware.- The snap tongue for type II hardware shall be fabricated from aluminum specified in 3.2.2.

3.3.2.2 Snap spring for type II hardware.- The snap spring for type II hardware shall be fabricated from material specified in 3.2.3.

3.3.3 Alternate aluminum slide.- When supplied (see 3.3), the alternate slide shall be fabricated from aluminum alloy sheet specified in 3.2.2, except that the temper shall be temper O. The aluminum slide shall be of one-piece construction conforming to the size and dimensions of Drawing 4-1-435. The slide shall not be detachable after final assembly to buckle body.

3.3.4 Rivets.- Rivets shall conform to the aluminum specified in 3.2.4 and shall be of the size and style specified on drawings. All rivets shall be spun and smoothly headed. The rivets shall not split, crack or fracture the castings.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:10Z
Check the source to verify that this is the currentversion before use.

3.3.5 Castings.- All castings shall be of uniform quality, free from blowholes, porosity, hardspots, shrinkage defects and cracks. All castings shall be smooth, clean and free from burrs or sharp edges.

3.3.6 Die ejector pins for slide cap, and slide base for type I and II buckles.- When internal ejector pins are used to release the slide cap and slide base from the die, the centerline of the ejector pins shall be located equidistant between the centerline of the rivet holes in the slide. The ejector pin marks shall be flush with the surface of the casting to a maximum of 0.005 inch in depth.

3.3.7 Proof load of hardware of types I, II, III and IV.- The hardware types I, II, III and IV shall not fracture or permanently distort under a 375 pound load when tested as specified in 4.4.2.

3.4 Finish.-

3.4.1 Surface preparation.-

3.4.1.1 Type I buckle, type III loop and type IV ring.- The type I buckle body with magnesium slide, type III loop, and type IV ring shall be given a treatment conforming to type III of MIL-M-3171. The treatment shall be applied at any stage of assembly of the buckle. When the buckle is supplied with an aluminum slide (see 3.3), the slide shall be given a treatment conforming to class 2 of MIL-C-5541, prior to assembly.

3.4.1.2 Type II buckle with eye and snap.-

3.4.1.2.1 Buckle, eye and snap body.- The type II buckle body with magnesium slide, eye, and snap body shall be given a treatment conforming to type III of MIL-M-3171. This treatment shall be applied at any stage of assembly. When the buckle is supplied with an aluminum slide (see 3.3), the slide shall be given a treatment conforming to class 2 of MIL-C-5541, prior to assembly.

3.4.1.2.2 Rivets and tongue.- Before assembly, the aluminum rivets and tongue of the snap shall be given a treatment conforming to class 2 of MIL-C-5541.

3.4.1.2.3 Spring.- Before assembly, the steel spring shall be given a treatment conforming to any method, type I or II of TT-C-490.

3.4.2 Priming.- Surfaces of all types of hardware shall, after surface preparation specified in 3.4.1, be coated with primer specified in 3.2.5. Application of primer to snap tongue, spring and tongue rivet of type II buckle shall be made before assembly. Application of primer to other components may be made during any stage of assembly. Rivets joining

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

the eye to type II buckle and rivets of the slide need not be primed.

3.4.3 Enameling.- Surfaces of all types of hardware shall, after priming, be coated with enamel specified in 3.2.6 and baked. Application of enamel to snap tongue, spring and tongue rivet of type II buckle shall be made before assembly. Application of enamel to other components may be made at any stage of assembly. Rivets joining the eye to type II buckle, and rivets of the slide need not be enameled prior to spinning. Rivet heads of completed hardware, after spinning, shall be cleaned and coated with enamel specified in 3.2.6 and baked, or with an adherent air drying black enamel or lacquer. Coating weight of primer and enamel combined shall be a minimum of 20 milligrams per square inch of surface when tested as specified in 4.4.3.

3.4.3.1 Gloss.- Gloss of enamel shall be 40 maximum, when tested as specified in 4.4.4.

3.4.3.2 Resistance to accelerated weathering.- The enamel shall show no more than slight chalking when tested for resistance to accelerated weathering as specified in 4.4.5.

3.4.3.3 Resistance to salt spray.- The enamel shall be tested for resistance to salt spray as specified in 4.4.6. The enamel shall show no wrinkling or blistering when examined immediately upon removal of the panel from the salt spray chamber; nor shall there by any evidence of corrosion of the base metal. Upon air drying for 24 hours after removal from salt spray, the enamel shall be no softer than an unexposed enamel prepared in the same manner.

3.4.3.4 Knife test.- A film of the enamel shall be difficult to score through to the metal. The score produced in the enamel film shall not have the jagged edge characteristic of brittle films when tested as specified in 4.4.7.

3.5 Marking for indentification.- Each type of hardware shall have the manufacturer's name or trademark integrally cast in the location identified on Drawings 4-1-190 and 4-1-192.

3.6 Workmanship.- All surfaces shall be free of burrs, slivers, and rough or sharp edges. Components shall bot be broken, cracked, or malformed. The enamel coating shall level out to a continuous, smooth, dry film thickness without runs, drops, streaks or areas of no film. The coating shall be free from imbedded foreign matter and shall show no evidence of peeling, flaking or blistering.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:10Z
Check the source to verify that this is the current version before use.

of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection.- When a preproduction sample is required, it shall be examined for the defects specified in table IV and dimensions specified. The preproduction sample shall be tested as specified in 4.4.2, 4.4.3, 4.4.4, 4.4.5, 4.4.6 and 4.4.7.

4.3 Sampling for inspection.- Sampling for inspection shall be made in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3.1.1 Enamel tests.- The enamel shall be tested for the characteristics in table I. The inspection level shall be S-1 with an acceptable quality level (AQL) of 6.5 expressed in terms of defects per hundred units.

TABLE I - Enamel tests

Material and lot expressed in terms of	Characteristic	Requirement para.	Test method	Requirement appl to ind. unit	No. deter. per unit	Results reported as	Test unit
Baking enamel (1 gal.)	Resistance to abrasion	3.2.6.1	4.4.1	X	2	Average of 2 deter. to the nearest milligram	Two 4 in. by 4 in. unprimed magnesium panels

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

TABLE I - Enamel tests (cont'd)

Material and lot expressed in terms of	Characteristic	Requirement para.	Test method	Requirement appl to ind. unit	No. deter. per unit	Results reported as	Test unit
Baking enamel (1 gal.) (cont'd)	Urea resin modified epoxy type pigment with carbon black and ultra fine silica	3.2.6	Std. commercial	X	1	Pass or fail	Two 1 pint containers

4.3.2 In-process inspection.-

4.3.2.1 Process examination.- Examination shall be made during the manufacturing process for the requirements specified in table II to establish that no deviation is made from indicated requirements. Whenever nonconformance is noted, correction shall be made to affected items and process.

TABLE II - Process examination.-

Requirements	Requirement paragraph
Prepaint treatment	3.4.1
Priming	3.4.2
Riveting (spinning of heads)	3.3.4

4.3.2.2 Inspection of castings.- The castings shall be inspected prior to assembly and surface preparation. The lot shall be all the castings of one type offered for inspection at one time. The sample unit for this inspection shall be one casting of each type.

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:10Z
Check the source to verify that this is the current version before use.

4.3.2.2.1 Visual examination of intermediate product.- Examination shall be made of the castings for defects in table III. The inspection level shall be S-3 with an acceptable quality level (AQL) of 2.5, expressed in terms of defects per hundred units.

TABLE III - Visual examination of casting

Examine	Defect
Workmanship	Blowhole(s)
	Not uniform, i.e., any porosity, hard spots, shrinkage defects, cracks
	Not smooth
	Not clean
	Holes not countersunk when required

4.3.2.3 Dimensional examination of castings.- Examination shall be made of castings for compliance with dimensions specified. Any deviation therefrom shall constitute a defect. The inspection level shall be S-1 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3 End item inspection.- The lot shall be all the hardware of one type offered for inspection at one time. The sample unit for this inspection shall be one completed buckle, slide loop, or V-ring as applicable.

4.3.3.1 Visual examination.- Examination shall be made of the end item for defects in table IV. The inspection level shall be level II with an AQL of 2.5 for major defects, and 10.0 for total defects, expressed in terms of defects per hundred units.

TABLE IV - Classification of defects

Examine	Defect	Classification Major	Minor
Finish of magnesium, aluminum and steel hardware	Color not black	X	
	Area of no film	X	
	Rivet head not coated with enamel	X	
	Finish not continuous, smooth, and adherent, i.e., has run, creep, peel, streaked, wrinkled or blistered	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

TABLE IV - Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Finish of magnesium, aluminum and steel hardware	Finish is rough, i.e., appreciable lint, dust or other matter imbedded in finish		X
Construction, assembly and workmanship	Part or component missing from the assembly	X	
	Part or component broken, fractured, cracked, twisted, warped, misaligned or malformed	X	
	Any sharp edge, projections, burr, or metal sliver	X	
	Pronounced tool or forming marks clearly noticeable, except for ejector marks on castings		X
	Any functioning part that cannot be operated, or requires abnormal force to operate	X	
	Open joint between mating faces of slide		X
	Knurling omitted from adjustable slide	X	
	Knurling not coarse, cross-diamond design		X
	Knurling incomplete		X
	Die ejector pin marks not located equidistant between center line of rivet holes in slides		X
	Die ejector pin mark not approximately flush with surface of casting		X
	Rivet insufficiently headed, not smoothly headed, not concentric with hole, or is loose	X	
	Rivet head on wrong side of assembly		X
Aluminum slide, when applicable	Slide can be detached by hand from buckle body	X	
	Slide assembled backwards	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

TABLE IV.- Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Identification marking	Manufacturer's name or trademark and stock number missing, incorrect, illegible; of improper size, location or method of application		X

4.3.3.2 Dimensional inspection.- Inspection shall be made of hardware for compliance with dimensions specified. Any deviation therefrom shall constitute a defect. The inspection level shall be S-3 with an AQL of 4.0 expressed in terms of defects per hundred units.

4.3.4 Testing of end item.- Testing of the completely finished hardware shall be performed in accordance with table V for the characteristics shown therein. The inspection level for all tests shall be S-1 with an AQL of 4.0 expressed in terms of defects per hundred units. The sample unit shall be 6 complete buckles, slide loops or V rings as applicable.

TABLE V.- Testing of end item

Characteristic	Requirement para.	Test method	Number determinations per sample unit	Results reported as
Proof load test on hardware types I, II, III, and IV	3.3.7	4.4.2	1	Pass or fail
Coating weight of primer and enamel combined	3.4.3	4.4.3	1	To the nearest milligram per square inch
Gloss of enamel	3.4.3.1	4.4.4	1	Pass or fail
Accelerated weathering	3.4.3.2	4.4.5	2	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:10Z
Check the source to verify that this is the currentversion before use.

TABLE V.- Testing of end item (cont'd)

Characteristic	Requirement para.	Test method	Number determinations per sample unit	Results reported as
Resistance to salt spray	3.4.3.3	4.4.6	1	Pass or fail
Knife test	3.4.3.4	4.4.7	1	Pass or fail

4.3.5 Examination of preparation for delivery requirements.- An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table VI. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. The lot shall be the number of shipping containers offered for delivery at one time. The inspection level shall be S-2 and the AQL shall be 2.5 expressed in terms of defects per hundred units.

TABLE VI.- Examination of preparation for delivery

Examine	Defect
Marking, exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence or method of application
Materials	Any component missing or damaged
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping or tape banding and inadequate stapling Bulging or distortion of containers
Contents, exterior and interior	Number per package is more or less than required

4.4 Tests.-

4.4.1 Resistance to abrasion.- Resistance to abrasion shall be tested by method 6192 of Federal Test Method Standard No. 141. The enamel shall be applied on 4-inch square, clean, unprimed magnesium panels. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

thickness shall be 1.0 mil plus or minus 0.1 mils and shall be measured at four places equidistant from the center of the panel. The enamel shall be baked as specified by the supplier and aged at least 24 hours prior to testing. At least two panels shall be used and the results averaged. The CA-17 calibrase wheels are to be used to apply a pressure of 1000 grams against the test film for 500 cycles on each panel to determine conformance with 3.2.6.1.

4.4.2 Proof load on hardware types I, II, III, and IV.- The hardware types I, II, III and IV shall be subjected to a 375 pound load applied as indicated on Drawing 4-1-194 and at a rate not to exceed 1000 pounds per minute.

4.4.3 Coating weight of finish.- The test specimen shall be a piece of finished hardware, or a portion thereof, and shall be weighed to the nearest milligram. The coated area shall be measured in square inches (the area may be subdivided into component simple geometric shapes and then combined). The enamel shall then be stripped completely from the metal using a chemical stripper of a type that does not dissolve the base metal. The stripped metal shall be dried and weighed again. Coating weight shall be calculated by dividing the change in weight in milligrams by the coated area in square inches, and reported in milligrams per square inch to determine compliance with 3.4.3.

4.4.4 Gloss.- Gloss shall be estimated visually by examination of finished hardware against a black panel whose gloss is 40, as determined by method 6101 of Federal Test Method Standard No. 141. Highlight effects due to sharp curvatures of the hardware will be ignored as enamel is examined to determine conformance with 3.4.3.1.

4.4.5 Resistance to accelerated weathering.- The test specimen shall be a finished piece of hardware. The specimen shall be exposed for 168 hours to accelerated weathering in accordance with method 6152 of Federal Test Method Standard No. 141. The exposed surface shall be examined for chalking, by rubbing with a piece of light colored velvet, or cheese cloth wrapped around the finger using moderate pressure, to determine compliance with 3.4.3.2.

4.4.6 Resistance to salt spray.- Test specimen shall be a finished piece of hardware. The specimen shall be exposed to salt spray for 200 hours in accordance with method 6061 of Federal Test Method Standard No. 141 to determine compliance with 3.4.3.3. The thumbnail or knife shall be used to determine evidence of softening.

4.4.7 Knife test.- A cut shall be made in the enamel film on a portion of the hardware by a knife blade held at 30 degrees to the surface being tested. A narrow band (about 1/8 inch) of exposed metal shall be produced to determine compliance with 3.4.3.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging.- Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A.- Unless quantities are specified otherwise (see 6.2), 400 type I buckles; 200 type II buckles; 500 type III loops; or 400 type IV V-rings, shall be packaged in a fiberboard box conforming to style RSC, V2s or V3c of PPP-B-636. Boxes shall be well-filled and compact. If quantities are other than as specified above, the gross weight of boxes shall not exceed 70 pounds.

5.1.2 Level B (see 6.4).- Unless quantities are specified otherwise (see 6.2), the same quantities as specified in level A shall be packaged in a fiberboard box conforming to style RSC, type CF, variety SW or type SF, class domestic, grade 200 of PPP-B-636. If quantities are other than as specified above, buckles, loops, or V-rings may be packaged in boxes conforming to PPP-B-566, PPP-B-665, PPP-B-676, in lieu of PPP-B-636, provided the gross weight does not exceed the weight limitation of the box specification. Closure shall be in accordance with the appendix of the box specification.

5.1.3 Level C.- Hardware shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity.

5.2 Packing.- Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A.- Unless quantities are specified otherwise, 2400 type I buckles; 1200 type II buckles; 3000 type III loops; or 2400 type IV V-rings, packaged as specified in 5.1, shall be packed in a snug-fitting cleated-plywood box conforming to PPP-B-601, overseas type, constructed of plywood conforming to type I of NN-P-30, or exterior type.

5.2.2 Level B.- Unless quantities are specified otherwise (see 6.2), 2400 type I buckles; 1200 type II buckles; 3000 type III loops, or 2400 type IV V-rings, packaged as specified in 5.1, shall be packed in a snug-fitting, cleated-plywood box conforming to PPP-B-601, domestic type or in a snug-fitting nailed wood box conforming to PPP-B-621.

5.2.3 Level C.- Hardware, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.- In addition to any special marking required by the contract

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use.- The hardware covered by this specification is intended for use with the sling, universal, individual load carrying (MIL-S-43013).

6.2 Ordering data.- Procurement documents should specify the following:

a. Title, number and date of this specification
b. Type hardware required (see 1.2)
c. When a preproduction sample is required (see 3.1)
d. Selection of applicable levels of packaging and packing (see 5.2 and 6.4)
e. Whether quanitity per package and pack is other than specified (see 5.1.1, 5.2.1 and 5.2.2)

6.3 The enamel requirements of this specification have been met by an enamel of the following formulation:

	Parts by weight
Ultrafine Silica Syloid 244	30.7
Elf-1 Channel Black (Godfrey L. Cabot Co.)	8.4
Epon 1007 (Shell Chemical Co.)	226.0
Beckamine P-138 (Reichold)	161.2
Diacetone Alcohol	187.0
Xylol	286.1
Cyclohexanone	97.5
Bentonite, Bentone 18-C	3.0
Silicon, SF-69 (10% Toluol)	0.1
Total	1000.0

6.4 Level B packaging.- Level B packaging should not be specified for overseas shipment on outside storage (see 5.1.2).

6.5 Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - MC
Air Force - 69

Preparing activity:

Army - GL

Project No. 5340-0530

Review activities:


Army - AV
Navy - MC
Air Force - 69

User activity:

Army - CE

Review and User information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing Of DOD Documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

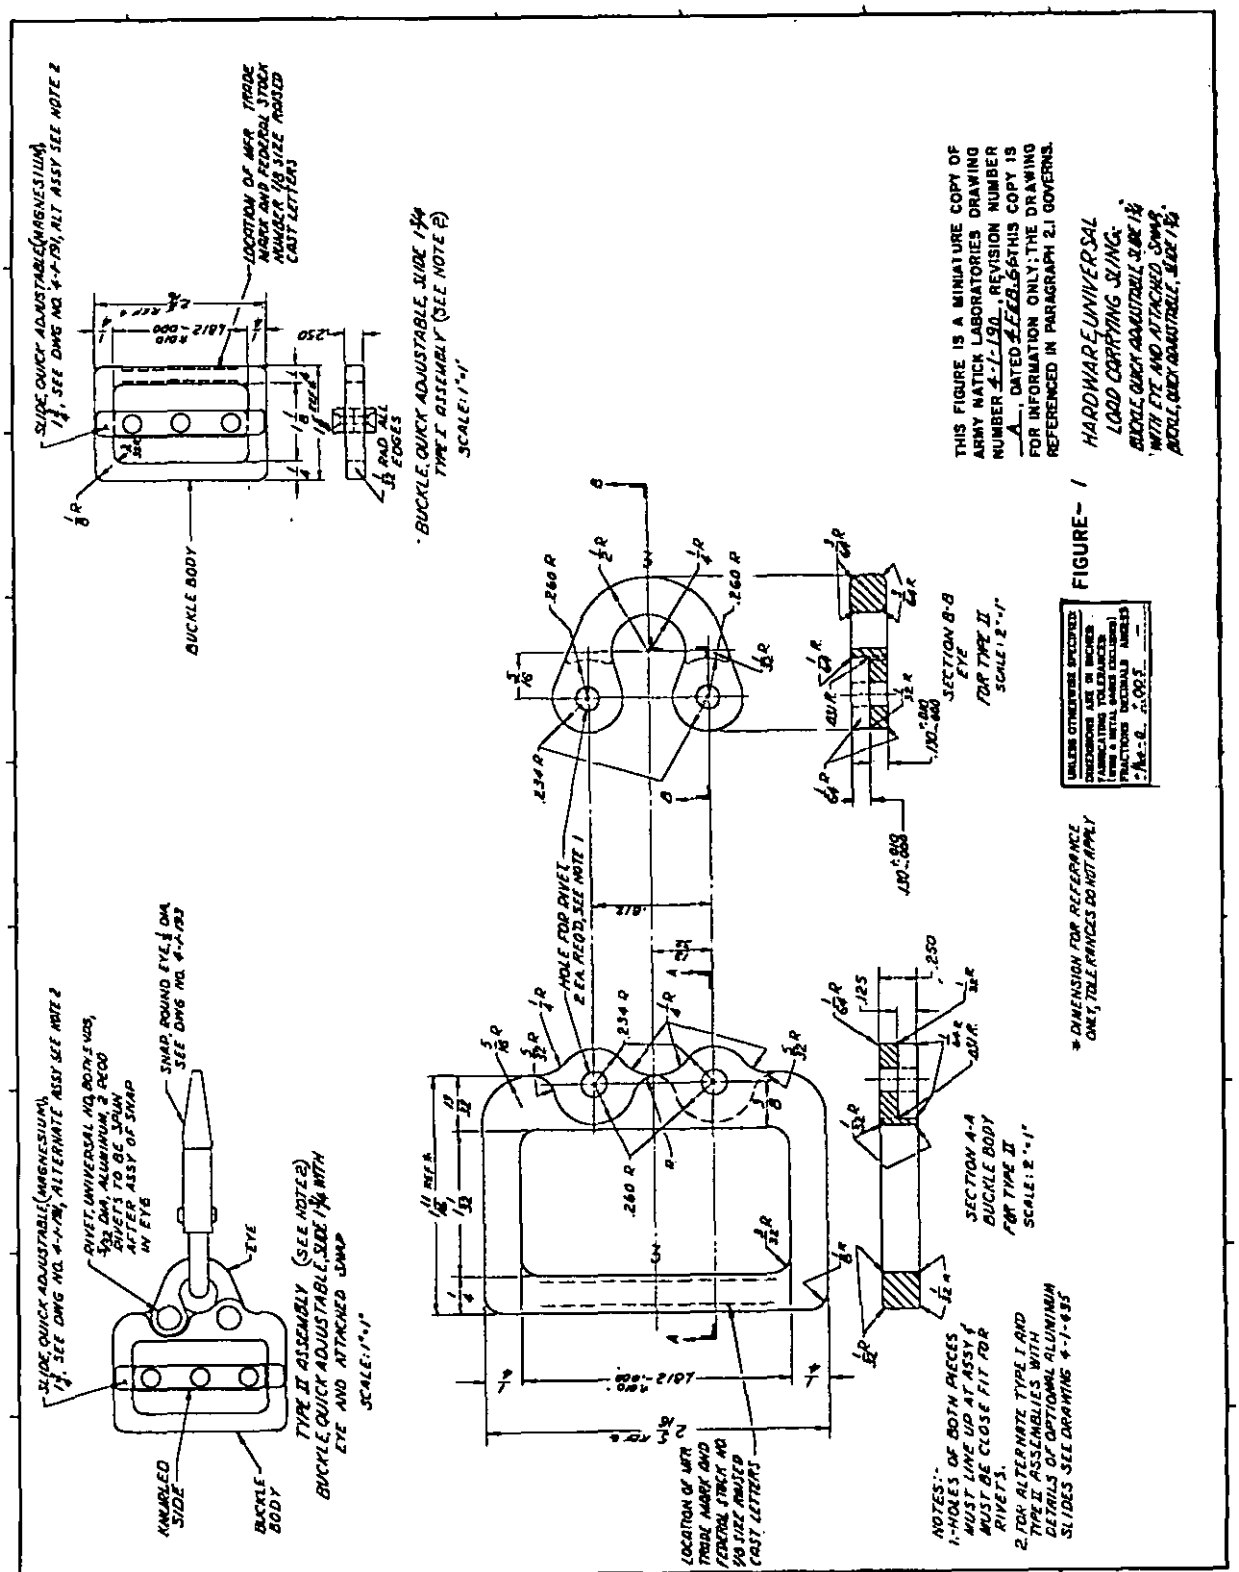

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:10Z
Check the source to verify that this is the current version before use.

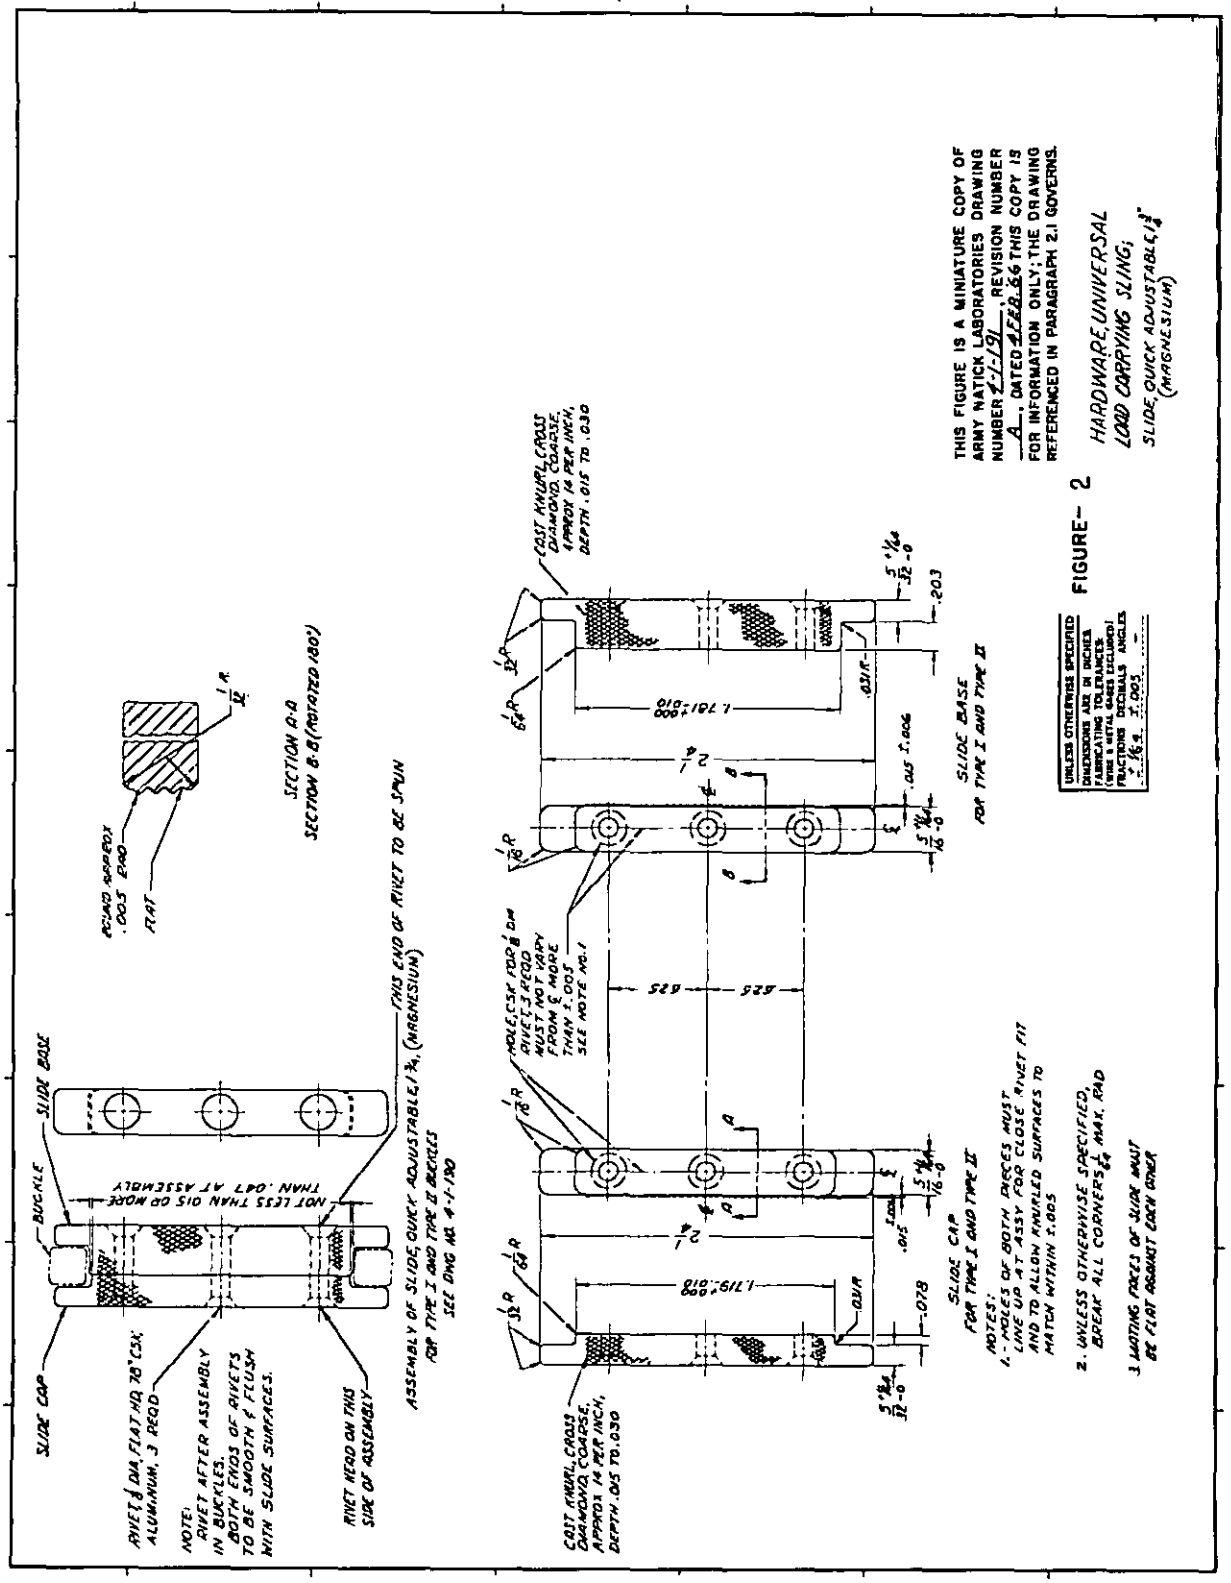


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202640-17T13:10Z
Check the source to verify that this is the current version before use.

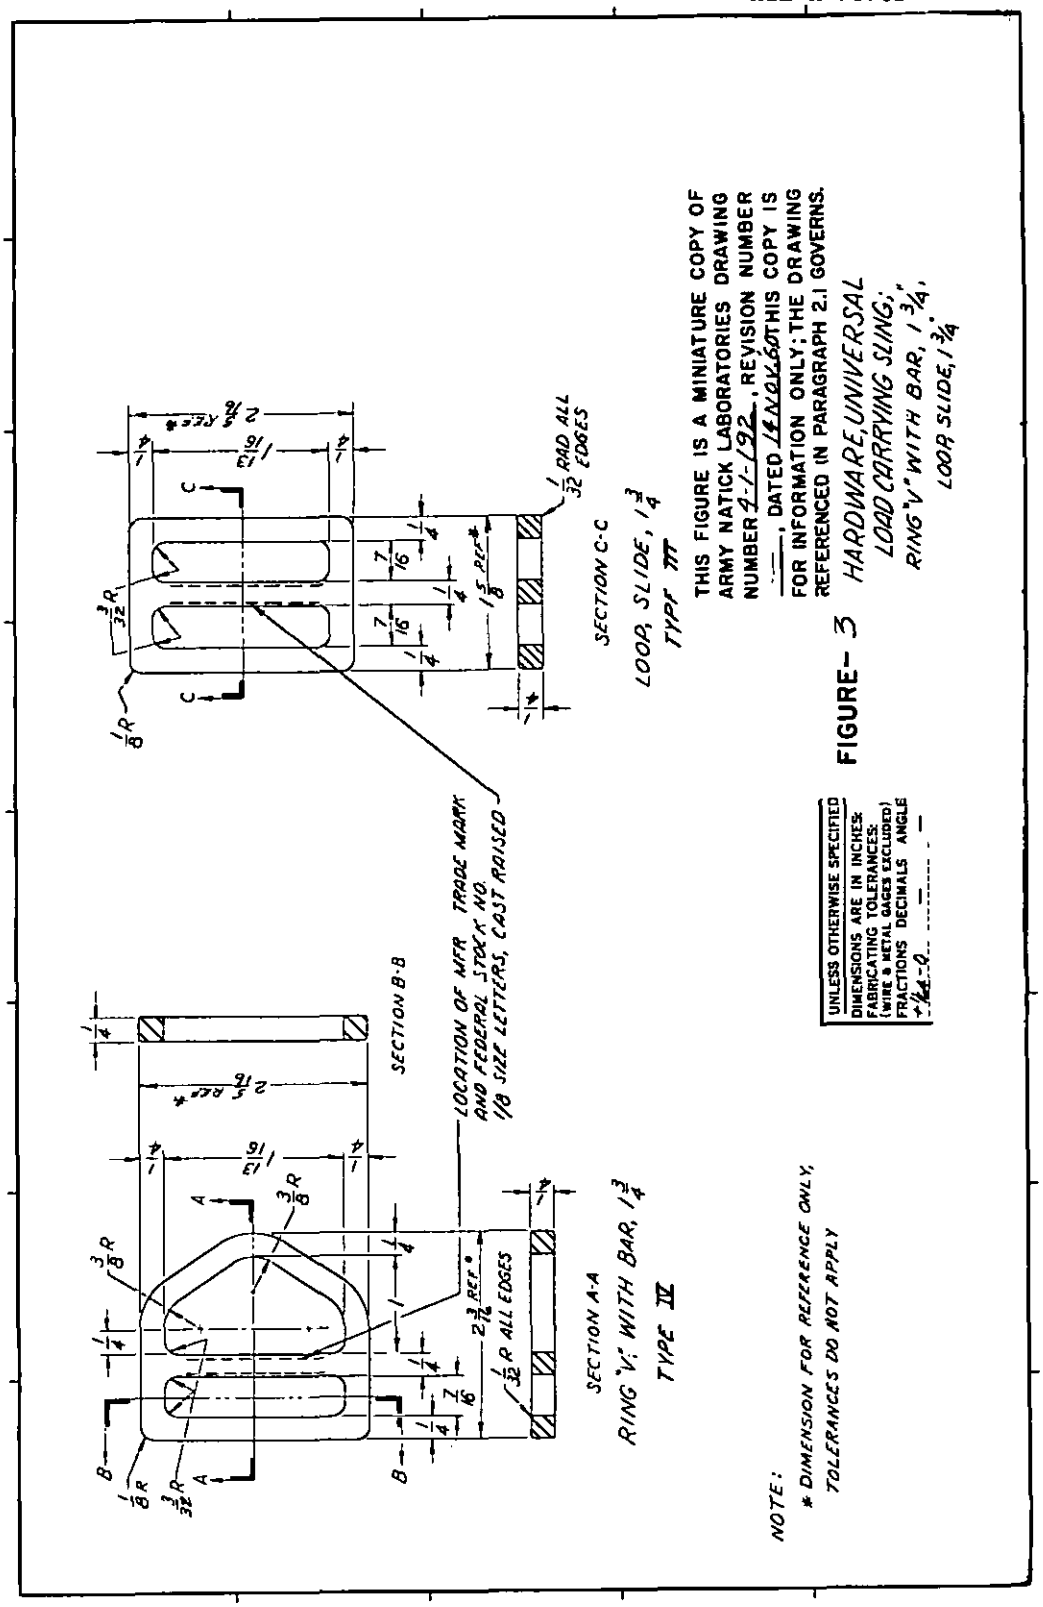


FIGURE- 3 HARDWARE, UNIVERSAL LOAD CARRYING SLING; RING "V" WITH BAR, 1 3/4", LOOP SLIDE, 1 3/4

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:10Z
Check the source to verify that this is the current version before use.



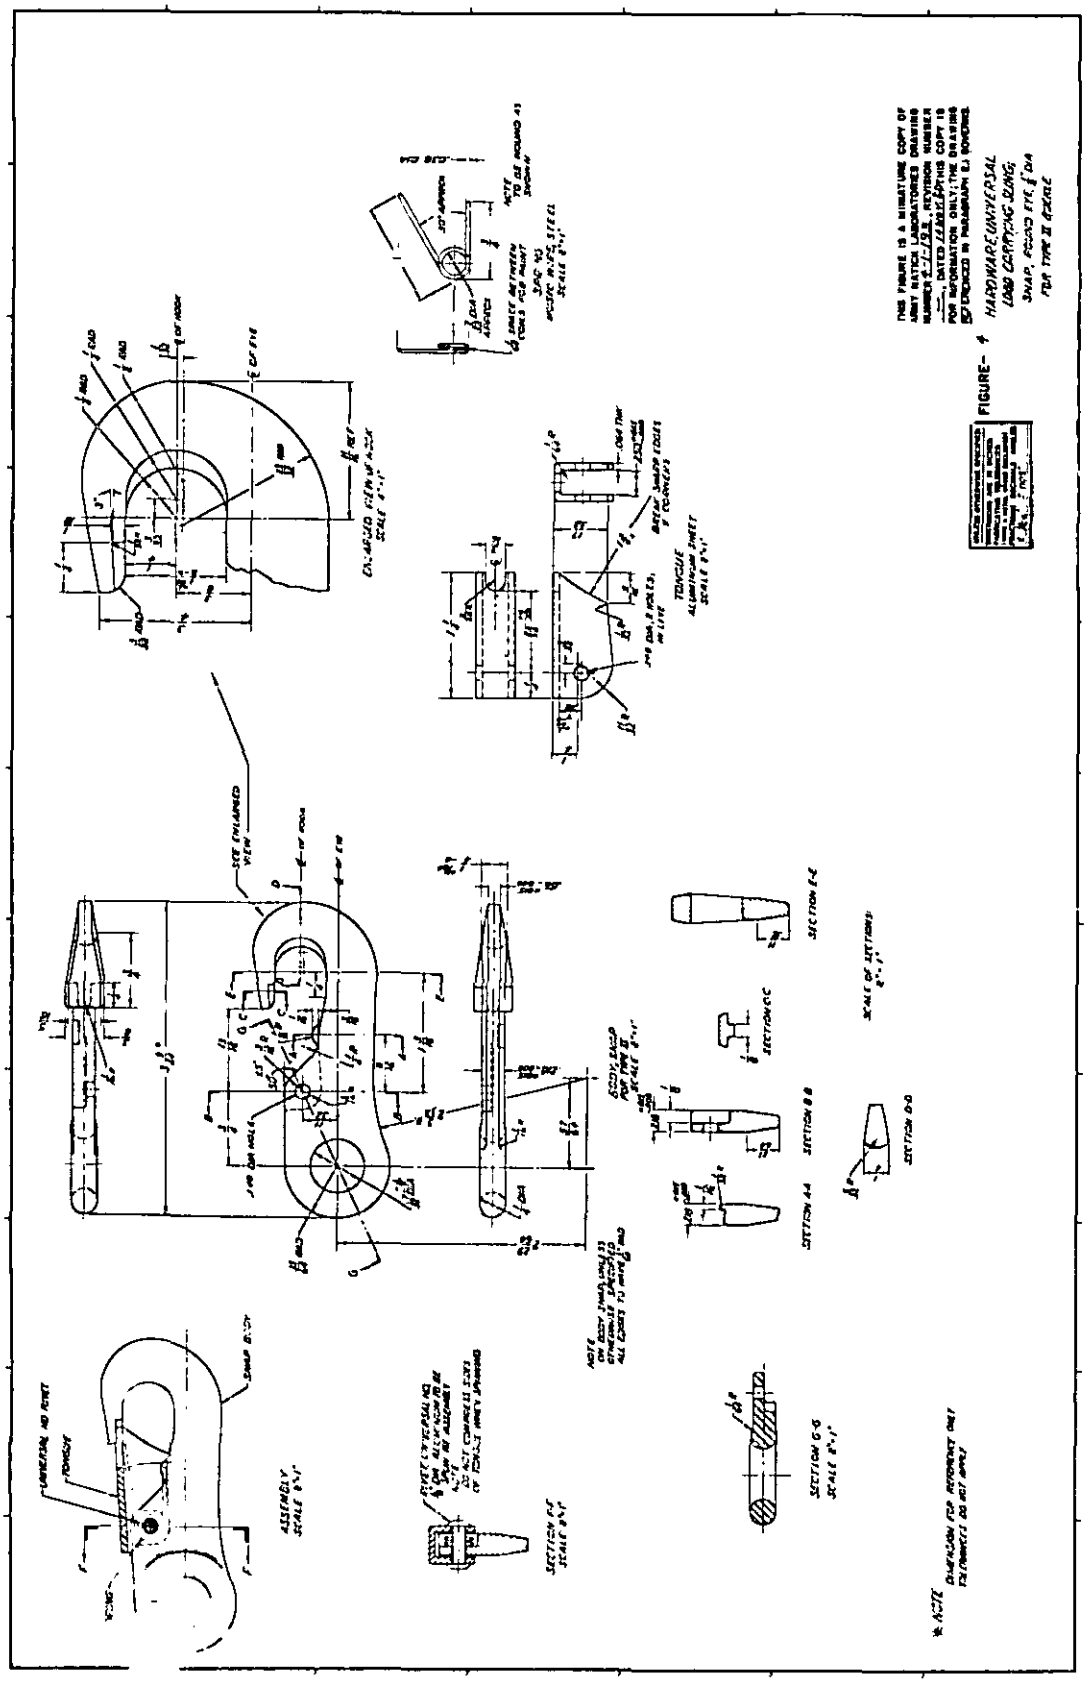


FIGURE 4. HARDWARE, UNIVERSAL LOAD CARRYING RING, SNAP, ROUND EYE, 5" DIA FOR TYPE III CANVAS

Source: https://assist.dla.mil -- Downloaded: 202610-17T13:10Z
Check the source to verify that this is the current version before use.

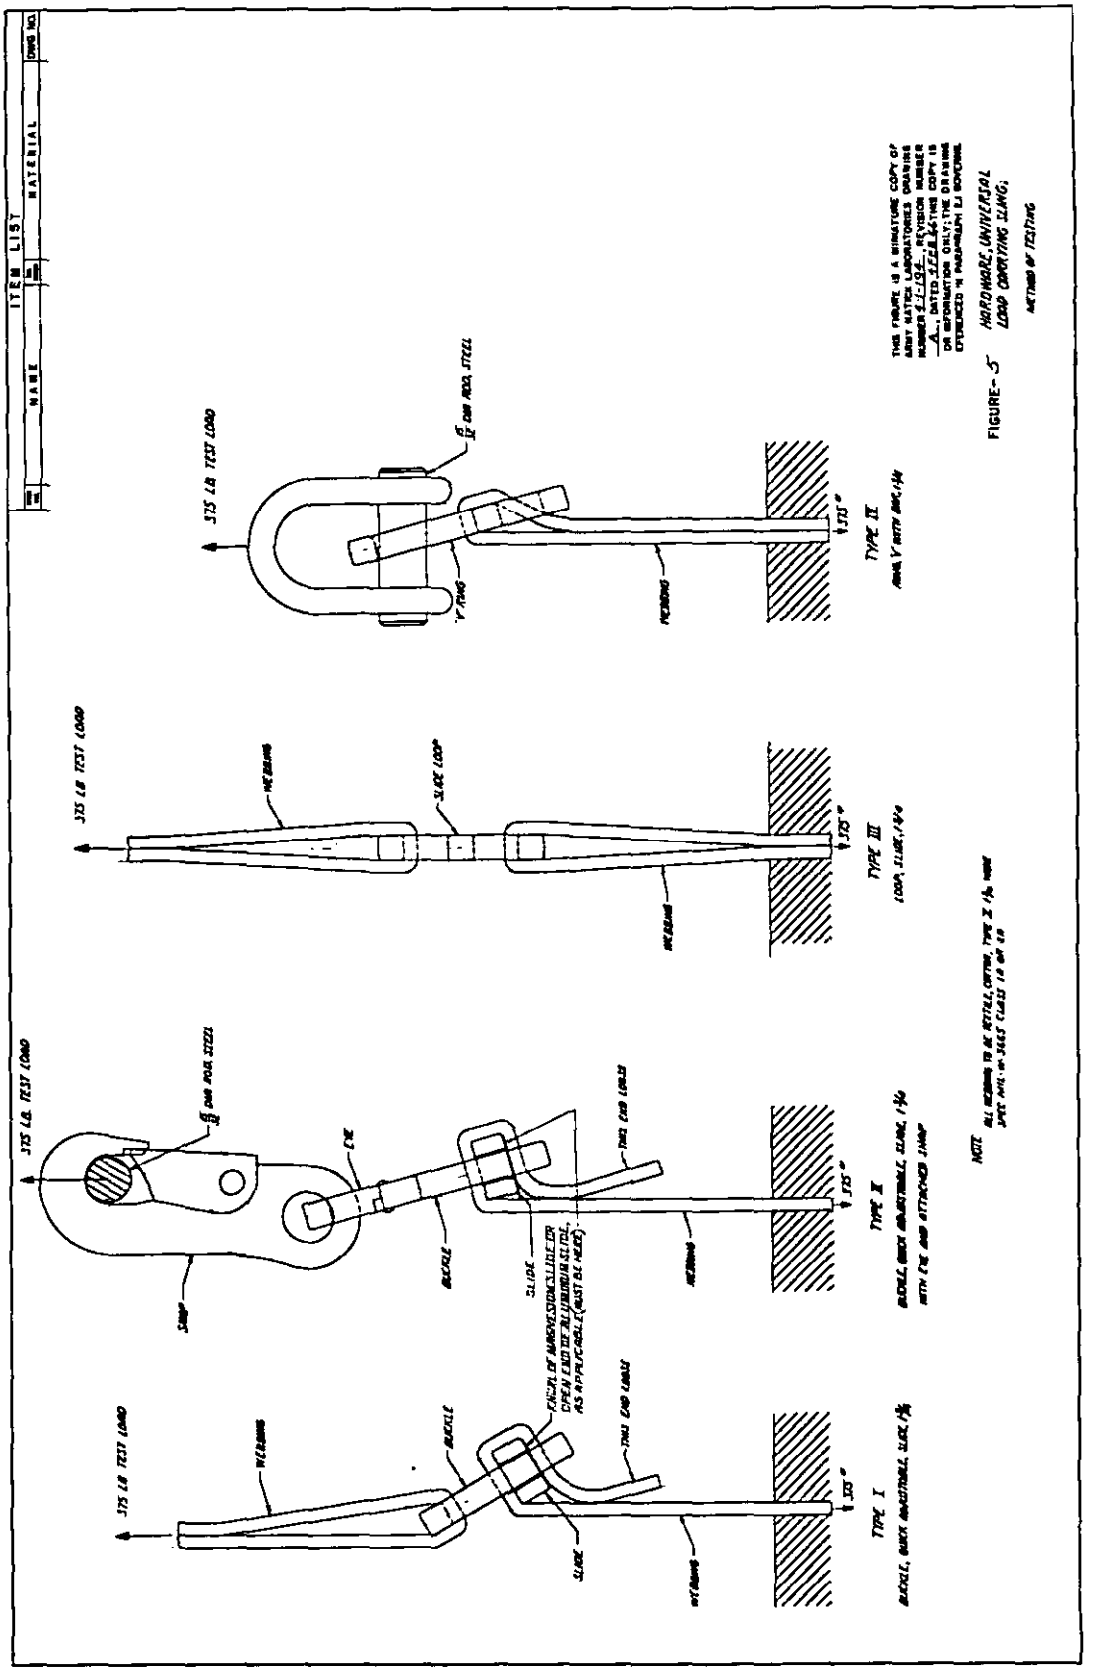

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

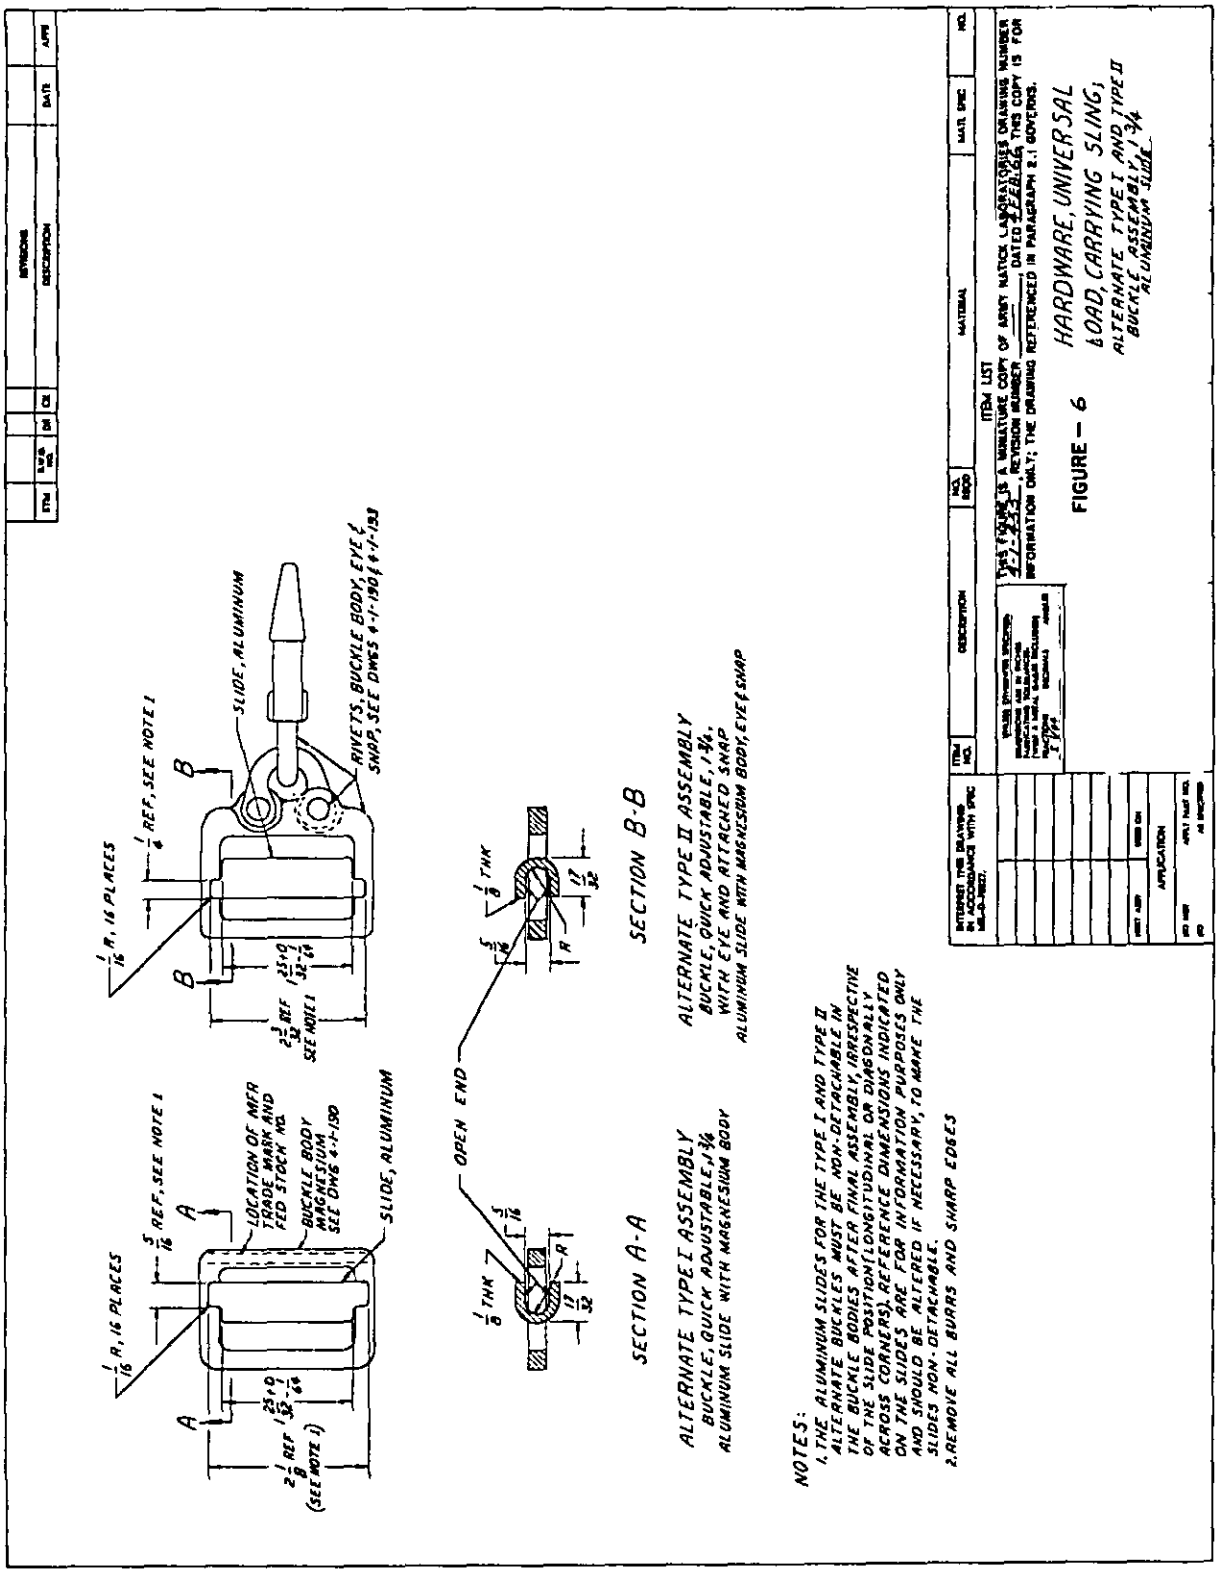

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Hardware, Universal Load Carrying Sling - MIL-H-9896B

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T13:10Z
Check the source to verify that this is the current version before use.