MIL-I-7723B
AMENDMENT 2
30 December 1971
Superseding
Amendment 1
1 June 1967

MILITARY SPECIFICATION

INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE,
MULTIFUNCTION, -70° TO +150°C, DUAL

This amendment forms a part of Military Specification MIL-I-7723B, 1 June 1965, and is mandatory for use by all Departments and Agencies of the Department of Defense.

Page 1

Title: Delete "±" sign before 150° and substitute "+" sign.

2.1 Under Specifications list:

MIL-L-25142 Luminescent Material, Fluorescent

Page 3

Delete Figure I and substitute the new Figure I on page 2.

Page 7

4.4.11 Bulb lead resistance effect: Delete the second sentence and substitute the following:

"Scale error tests shall be performed for each indicator movement. The test shall be performed with the specified resistors in each lead. The test shall then be repeated without resistors in the leads."

Page 8

Figure 2: Change value of resistor between pin C and ground from 2 ohms to 1 ohm.

Custodians:
Air Force - 82
Army - AV
Navy - AS


Preparing activity:
Navy - AS

Review activities:
Air Force - 82
Army - AV
Navy - AS
NS

User activities:
Air Force -
Army -
Navy - MC, CG
DOD Project No. 6620-0260

FSC 6685

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:46Z
Check the source to verify that this is the current version before use.

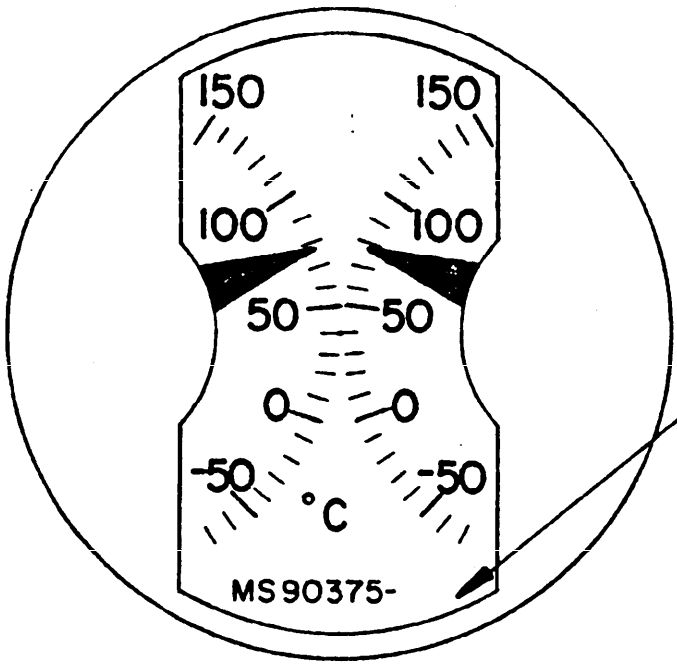

NOTE:
INSERT APPLICABLE
DASH NO.

MARKING	HEIGHT OR LENGTH ±0.010	WIDTH OF LINE ±0.005	MATERIAL OF FINISH
NUMERALS -50	0.156	0.030	LUSTERLESS WHITE COLOR NO. 37875 OF FED-STD-595 OR FLUORESCENT LUMINESCENT OF MIL-L-25142
NUMERALS 0, 50, 100, & 150	0.187	0.030	
VISIBLE PORTION OF POINTERS	-----	-----	
MAJOR GRADUATIONS	0.125	0.020	
MINOR GRADUATIONS	0.094	0.010	
LETTERING °C	0.187	0.030	
MS PART NUMBER	0.063	-----	LUSTERLESS BLACK COLOR NO. 37038 OF FED-STD-595
BACKGROUND OF DIAL	-----	-----	

DIMENSIONS IN INCHES

FIGURE 1. DIAL, POINTERS, AND MARKINGS

Source: https://assist.dla.mil -- Downloaded: 20260-17T08:46Z
Check the source to verify that this is the current version before use.