NOT MEASUREMENT SENSITIVE


MIL-B-3628/58G
30 July 1993
SUPERSEDING
MIL-B-3628/58G
13 September 1991

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, SECURITY POLICE, FUNCTIONAL, AIR FORCE

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

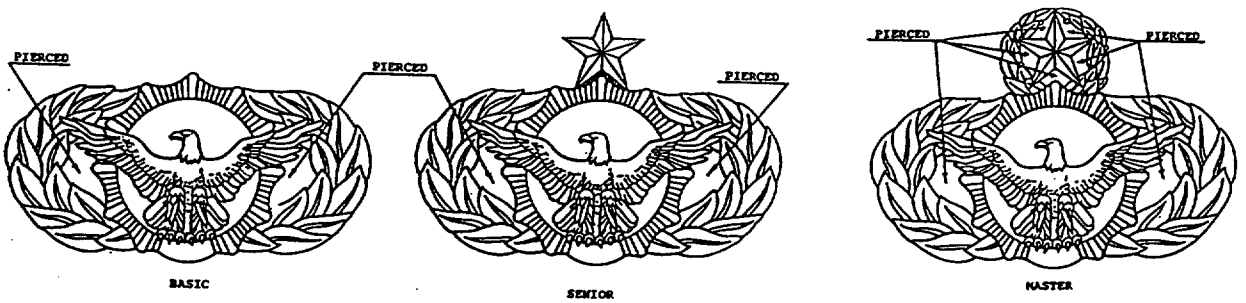

MATERIAL: Red Brass or Nickel Silver

DIMENSIONS:
HEIGHT (Overall):
-1: 7/8 inch (2.22 cm) (REF)
-2: 1-1/8 inches (2.86 cm) (REF)
-3: 1-3/16 inches (3.02 cm) (REF)

WIDTH (Overall): 1-5/8 inches (4.13 cm) (REF)

THICKNESS (At thickest point): 0.120 inch ± 0.010 inch (0.304 cm ± 0.025 cm)

DASH NO.
-1: Basic, Regular Size
-2: Senior, Regular Size
-3: Master, Regular Size

FINISH: Nickel plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Piercing shall be as indicated.

3. The attaching device shall be prong and clutch type. Prongs shall be located at each intersection of the horizontal center line of the badge and the center of the wreath.

4. A mock forcer may be used to bring up the detail on the eagle, star, and star and wreath.

Custodian:
Army - IH
Air Force - 11

Review activities:
Air Force - 82, 99
DLA - CT

User activities:
Air Force - 45

Preparing activities:
Army - IH

(Project No. 8455-0693)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:12Z
Check the source to verify that this is the current version before use.