NOT MEASUREMENT SENSITIVE


MIL-B-3628/59B
30 July 1993
SUPERSEDING
MIL-B-3628/59A
10 February 1988

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, DIVER, NATIONAL OCEANIC AND ATMOSPHERIC ADMINISTRATION

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

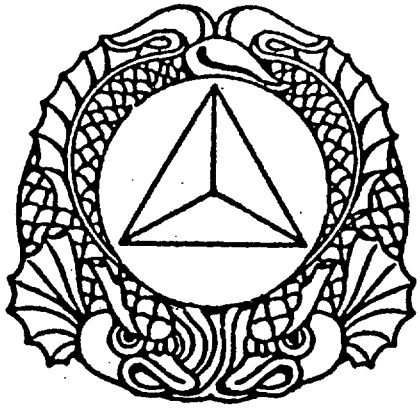

MATERIAL: Red Brass

FINISH: Gold Plated, Matte Finish with the Dolphins and Pyramid Highlights Polished and shall match TIOH Metal Finish Chip Number 8.

DIMENSIONS:

DIAMETER: 3/4 inch (1.91 cm) (REF)
THICKNESS (At Thickest Point): 0.105 inch ± .010 inch (0.267 cm ± 0.025 cm)

NOTES:

1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. The attaching device shall be prong and clutch type. Two prongs shall be located equidistant from each side and 5/8 inch ± 1/32 inch (1.59 cm ± 0.08 cm) apart.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-16T19:13Z
Check the source to verify that this is the current version before use.

3. A mock forcer may be used to bring up the center of the badge.

Custodian:
Army - IH

Review activities:
DLA - CT

User activities:
Other - NOAA

Preparing activities:
Army - IH

(Project No. 8455-0693)

Source: https://assist.dla.mil - Downloaded: 202640-16T19:13Z
Check the source to verify that this is the current version before use.