
MIL-B-3628 / 63B
10 February 1988
SUPERSEDING
MIL-B-3628 / 63A
17 July 1985

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION AIR ASSAULT, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense. The complete requirements for procuring the item(s) described herein shall consist of this document and the issue in effect of Specification MIL-B-3628.

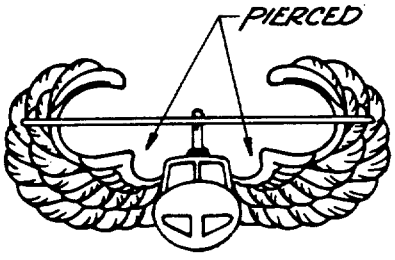

DASH NOS.
-1: REGULAR SIZE
-2: MINIATURE SIZE
-3: REGULAR SIZE, SUBDUED

MATERIAL: RED BRASS OR NICKEL SILVER

DIMENSIONS (INCHES):

HEIGHT (OVERALL):	WIDTH (OVERALL):	THICKNESS (CENTER OF ROTOR):
-1,-3: 3/4 (REF)	-1,-3: 1-17/32 (REF)	-1,-3: .090 ± .005
-2: 7/16 (REF)	-2: 7/8 (REF)	-2: .065 ± .005

FINISH:
OBVERSE:
-1,-2: NICKEL PLATED (RED BRASS ONLY), SILVER PLATED, OXIDIZED, RELIEVED, SATIN FINISH
REVERSE AND EDGES CLEAN
-3: DULL, FLAT BLACK ENAMEL FINISH

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:15Z
Check the source to verify that this is the current version before use.

NOTES:

1. DASH NOS. 1 AND 2 MAY BE MADE FROM STERLING SILVER FOR COMMERCIAL SALE AND IF SO THE THICKNESS DIMENSIONS GIVEN SHALL BE USED FOR REFERENCE ONLY. THE WEIGHTS SPECIFIED BELOW SHALL GOVERN. THE FINISH FOR STERLING SILVER BADGES SHALL BE AS SPECIFIED EXCEPT THE REQUIREMENTS FOR SILVER PLATING SHALL NOT APPLY.

	WEIGHT (MINIMUM)
-1:	100 GRAINS
-2:	25 GRAINS

2. ATTACHING DEVICE SHALL BE PRONG AND CLUTCH TYPE. PRONGS SHALL BE LOCATED AT EACH INTERSECTION OF THE HORIZONTAL CENTER LINE OF THE BADGE AND CENTER OF THE WINGS.

3. PIERCING AS SHOWN.

4. A FORCER MAY BE USED TO BRING UP THE NOSE OF THE HELICOPTER.

5. DASH NOS. 1 AND 2 ARE MAY BE RHODIUM PLATED FOR COMMERCIAL SALE FOR AIR FORCE SALE.

Custodian:
Army - IH

Review activities:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0268)

★ U.S. GOVERNMENT PRINTING OFFICE: 1988 505-033/90876

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:15Z
Check the source to verify that this is the current version before use.