NOT MEASUREMENT SENSITIVE


MIL-B-3628/63C
14 September 1990
SUPERSEDING
MIL-B-3628/63B
10 February 1988

MILITARY SPECIFICATION SHEET

BADGE, QUALIFICATION, AIR ASSAULT, ARMY

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-3628.

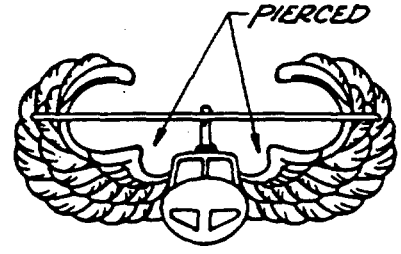

DASH NO:
- -1: Regular Size
- -2: Dress Miniature Size
- -3: Regular Size, Subdued

MATERIAL: Red brass or nickel silver

DIMENSIONS:

HEIGHT (Overall)
- -1,-3: 3/4 inch (1.91 cm) (REF)
- -2: 7/16 inch (1.11 cm) (REF)

WIDTH (Overall):
- -1,-3: 1-17/32 inch (3.89 cm) (REF)
- -2: 7/8 inch (2.22 cm) (REF)

THICKNESS (Center of Rotor):
- -1,-3: .090 inch ± .005 inch (0.228 cm ± 0.012 cm)
- -2: .065 inch ± .005 inch (0.165 cm ± 0.012 cm)

FINISH:
- -1,-2: Nickel plated (red brass only), silver plated, oxidized, relieved, matte finish.
- -3: Dull flat black enamel finish.

NOTES:
1. Piercing shall be as shown.
2. Attaching device shall be prong and clutch type. Prongs shall be located at each intersection of the horizontal centerline of the badge and the center of the wings.
3. A forcer may be used to bring up the nose of the helicopter.
4. Dash No. 1 and 2 may be nickel or rhodium plated with a mirror-like finish for commercial sale for Air Force use only.

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:15Z
Check the source to verify that this is the current version before use.

Custodian:
Army - IH

Review activity:
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0536)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T19:15Z
Check the source to verify that this is the current version before use.