MIL-C-25613D
20 JUNE 1972
SUPERSEDING
MIL-C-25613C(ASG)
16 October 1961

MILITARY SPECIFICATION

CONTROL, ALARM, AIRSPEED, ALTITUDE AND LANDING GEAR WARNING, TYPE MJ-3

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one landing gear warning control for operation by pitot and static pressures.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of the specification to the extent specified herein.

SPECIFICATIONS

Federal

NN-P-530	Plywood, Flat Panel
PPP-B-601	Boxes, Wood, Cleated - Plywood
PPP-B-636	Box, Fiberboard
PPP-B-1055	Barrier Material, Waterproofed, Flexible
PPP-T-60	Tape: Pressure-Sensitive Adhesive; Waterproof, For Packaging

Military

MIL-P-116	Preservation, Methods Of
MIL-C-172	Cases; Bases, Mounting; And Mounts, Vibration (For Use With Electronic Equipment In Aircraft)
MIL-D-1000	Drawings, Engineering And Associated Lists
MIL-E-5272	Environmental Testing, Aeronautical And Associated Equipment, General Specification For
MIL-C-5541	Chemical Conversion Coatings On Aluminum And Aluminum Alloys
MIL-I-6181	Interference Control Requirements Aircraft Equipment
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series: General Specification For
MIL-A-8625	Anodic Coatings, For Aluminum And Aluminum Alloys

Source: https://assist.dla.mil -- Downloaded: 20260-20T06:48Z
Check the source to verify that this is the current version before use.

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-129	Marking For Shipment And Storage
MIL-STD-130	Identification Marking Of US Military Property
MIL-STD-831	Test Reports, Preparation Of
MIL-STD-889	Dissimilar Metals
MIL-STD-1186	Cushioning, Anchoring, Bracing, Blocking, And Waterproofing; With Appropriate Test Methods
MS33649	Bosses, Fluid Connection - Internal Straight Thread
MS33678	Connector, Receptacle, Electric, Integral Mounting

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 202, Union Station, 516 West Jackson Boulevard, Chicago IL 60606.)

3. REQUIREMENTS

* 3.1 Preproduction. This specification makes provisions for preproduction testing (see 4.3).

3.2 Materials.

3.2.1 Nonferrous. Nonferrous materials shall be used for all parts of the control except where ferrous materials are essential.

3.2.2 Fungus-proof. Materials which are nutrients for fungi shall not be used where it is practicable to avoid them. If they are used and are not hermetically sealed (see 6.3.2), they shall be treated with a fungicidal agent acceptable to the procuring activity. If they are used in a hermetically sealed enclosure, fungicidal treatments will not be required.

Source: https://assist.dla.mil -- Downloaded: 202610-20T06:48Z
Check the source to verify that this is the current version before use.

3.2.3 Metals. Metals shall be corrosion-resistant types or shall be suitably treated to resist corrosion by fuels, salt spray, or atmospheric conditions likely to be met in storage or normal use.

* 3.2.3.1 Dissimilar metals. Unless suitably protected against electrolytic corrosion, dissimilar metals as defined in MIL-STD-889 shall not be used in intimate contact with each other.

3.2.4 Corrosive fumes. Materials used in the control shall not produce corrosive or deleterious fumes under the test conditions specified herein.

3.2.5 Protective treatment. When materials are used in the construction of the control which are subject to corrosion in salt air or other atmospheric conditions likely to occur during use, they shall be protected against such corrosion in a manner which will in no way prevent compliance with the performance requirements of the specification. The use of any protective coating which will crack, chip, or scale with age or extremes of atmospheric conditions shall be avoided.

3.3 Selection of specifications and standards. Specifications and standards for necessary commodities and services not specified herein shall be selected in accordance with procedures established by the procuring activity or as specified in the contract or order, except as provided in 3.3.1.

3.3.1 Standard parts. MS and AN standard parts shall be used where they are suitable and shall be identified on the manufacturer's drawings by their MS and AN numbers.

3.4 Design and construction.


3.4.1 Outline. The control shall conform to Figure 1.

3.4.2 Electrical circuit. The electrical circuit of the control shall conform to Figure 2.

3.4.3 The control shall be designed to withstand pressures up to 850 knots at sea level with no damage to the mechanism or change in performance, and to withstand pressures equivalent to 100,000 feet altitude with no damage to the mechanism. The design shall be reasonably simple to permit overhaul or repair without requiring special tools or fixtures. The control shall be so constructed that no part can become loose in service. The control shall be capable of withstanding the strains, jars, vibrations, and other conditions incident to shipping, storage, installation, and service.

3.4.4 Airspeed section. The airspeed section during decreasing or increasing airspeed shall actuate electrical contacts within ±5 knots of the preset airspeed. Contacts A to E shall open and contacts A to F shall close on decreasing airspeed (see Figure 2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:48Z
Check the source to verify that this is the current version before use.

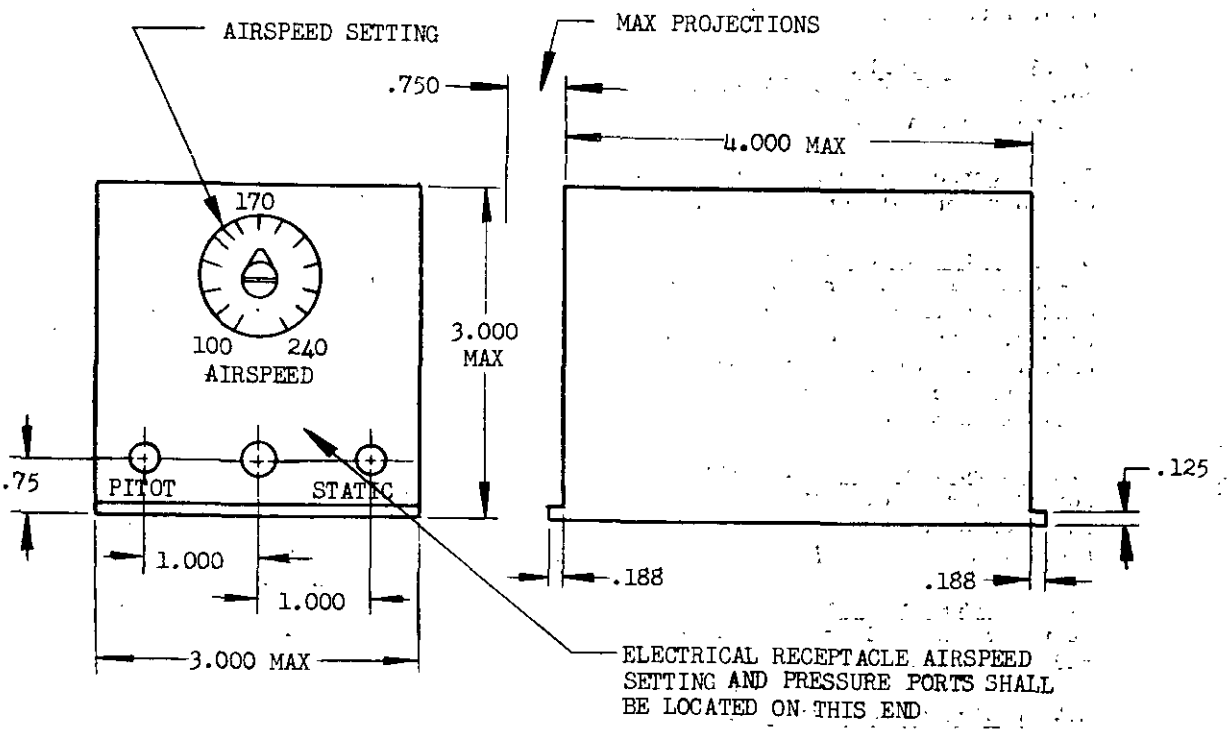

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010.

THE CONTROL NEED NOT HAVE THE SHAPE SHOWN, BUT MUST BE CONTAINED WITHIN THE OUTLINE SHOWN.

FIGURE 1. Outline

Source: https://assist.dla.mil -- Downloaded: 20260-20T06:48Z
Check the source to verify that this is the current version before use.

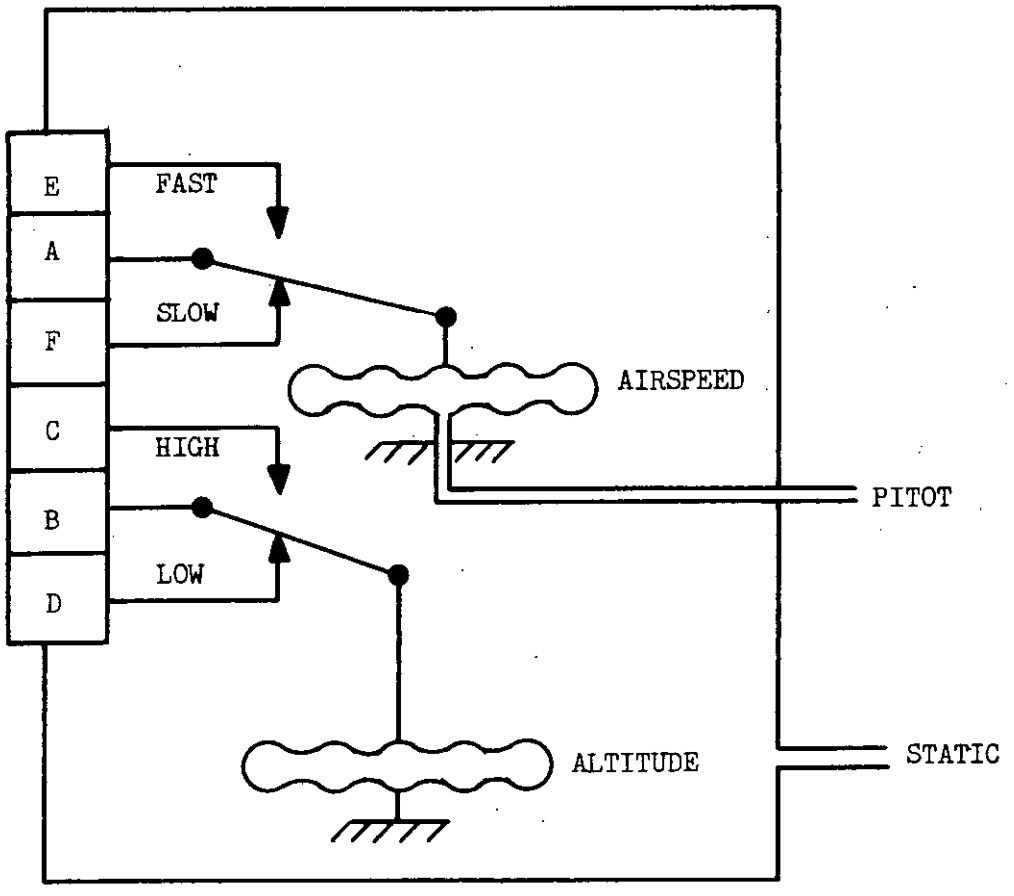


FIGURE 2. Electrical circuit

Source: https://assist.dla.mil -- Downloaded: 202610-20T06:48Z
Check the source to verify that this is the current version before use.

3.4.4.1 Adjustment. The control shall have an external airspeed adjustment capable of being set for any airspeed within a range of 100 to 240 knots and shall be located as shown on Figure 1. The dimensions of the adjustment are optional, except that there shall be 270 degrees to 340 degrees of arc between the 100-knot setting and the 240-knot setting. It shall be a screwhead-type adjustment with a dial with graduation markings as shown on Figure 1. Adjustment shall not change its position after being set when subjected to the vibration specified herein. A locking device shall not be used. The dial graduations need not be linear. The following statement shall be marked on the case of the control adjacent to the dial:

FOR REFERENCE ONLY - CONSULT HANDBOOK AND USE
MANOMETER FOR SETTING AIRSPEED.

3.4.5 Altitude section. The altitude section shall actuate electrical contacts at an altitude of 10,000 ±500 feet above sea level on increasing or decreasing pressure. Contacts B to C shall open and contacts B to D shall close on increasing pressure (see Figure 2).

3.4.5.1 Adjustment. The altitude section shall be preset by the manufacturer with no external adjustment.

3.4.6 Shock-mounted base. A suitable shock-mounted base, which shall develop the functional characteristics of MIL-C-172, shall be furnished with each control. The shock-mounted base shall conform to Figure 3.

3.5 Performance. The control shall be capable of passing the tests specified in Section 4 when subjected to the following conditions.

a. Dielectric strength: Withstand 500 volts at a commercial frequency of 60 cycles per second (cps) for a period of 1 minute between each electrical connector pin and the case.

b. Case leakage: Withstand 15 inches Mercury (Hg) vacuum and 10 inches Hg pressure (with the pitot and static connections "Y" connected) for a period of 10 seconds with the leakage not to exceed 0.2 inch Hg.

c. Airspeed sensor leakage: Withstand 25 inches Hg pressure (gage) to the pitot connection with leakage not to exceed 0.10 inch Hg, for a period of 1 minute.


d. Control setting:

(1) Pitot section: Withstand increased and decreased airspeed applications up to 500 knots with the error of the open and closed switch positions not to exceed the tolerances specified in Section 4.

(2) Static section: Withstand a decreased pressure (vacuum) equivalent to 80,000 feet altitude with the difference between the open and closed switch positions not to exceed the tolerances specified herein.

e. Attitude error: Withstand changes in attitude with errors not to exceed 2 knots airspeed and 50 feet altitude.

Source: https://assist.dla.mil -- Downloaded: 202640-20T06:48Z
Check the source to verify that this is the current version before use.

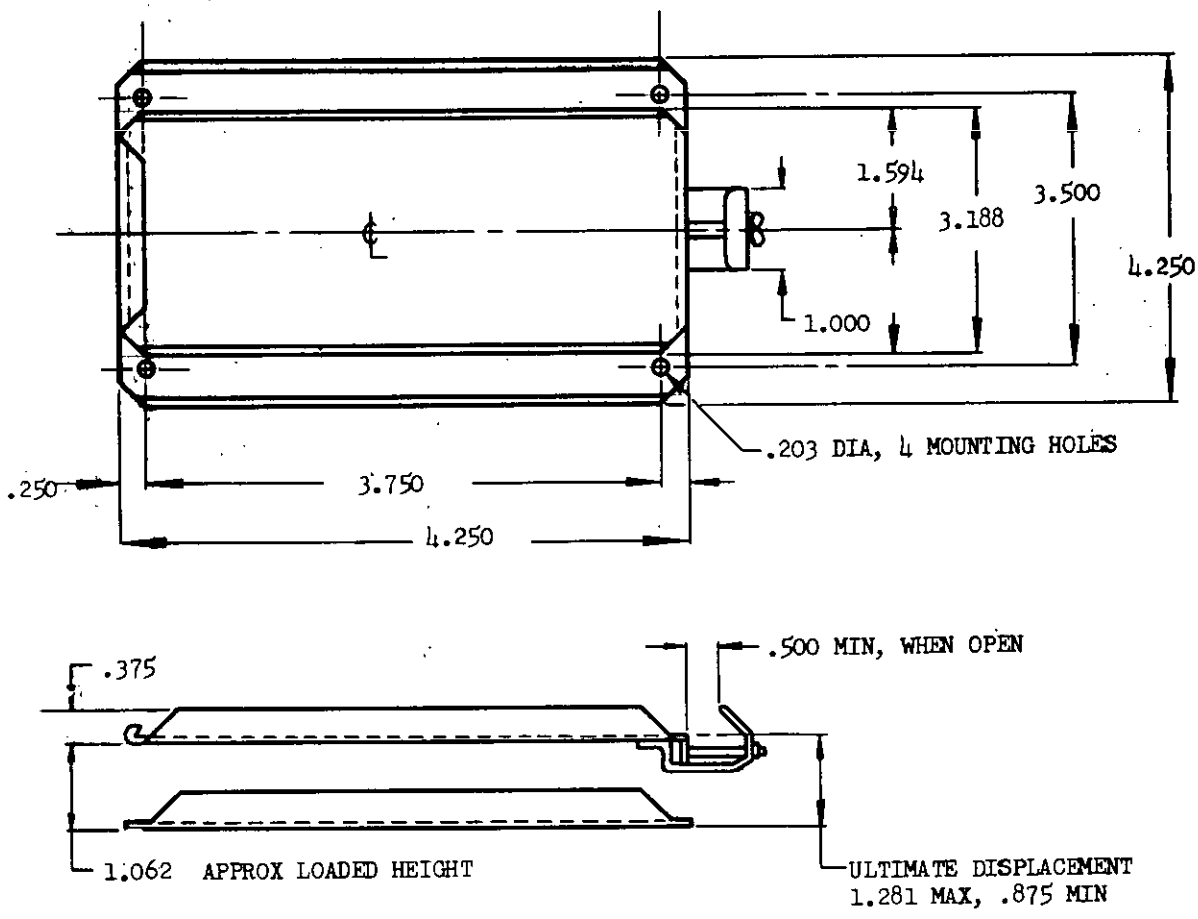

DIMENSIONS IN INCHES. TOLERANCES: DECIMALS: ±.016.

FIGURE 3. Shock mounting base

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:48Z
Check the source to verify that this is the current version before use.

f. Temperature: Withstand temperatures ranging from -73° to +125° Centigrade (C).

g. Vibration: Withstand vibration in each of three mutually perpendicular axes at amplitudes (see 6.3.1) ranging from 0.080 to 0.036 inch and frequencies ranging from 5 to 500 cps.

h. Overpressure: Withstand pressure equivalent to 850 knots airspeed to the pitot section, and vacuum equivalent to 100,000 feet altitude to the static section for a period of 10 minutes.

i. Seasoning: Withstand 1,000 applications of an absolute pressure equivalent to 80,000 feet altitude to the static port at a rate of approximately 3 cycles per minute (cpm) with the switch contacts making and breaking 5 amperes direct current (DC).

j. Acceleration: Withstand an acceleration force of 20 gravity (g) for a period fo 30 seconds.

k. Shock: Withstand 5 shock applications of 10g along the horizontal and lateral axis in both directions, and 5 shock applications of 15g along the vertical axis in both directions.

l. Salt spray: Withstand exposure to salt sea atmosphere for a period of 50 hours.

m. Sand and dust: Withstand sand and dust particles as encountered in desert areas.

n. Humidity: Withstand exposure to a relative humidity up to 100 percent for a period of 240 hours (10 cycles).

o. Fungus: Withstand exposure to fungus growth as encountered in tropical climates for a period of 28 days.

3.6 Radio interference. Radio interference shall be within the limits specified in MIL-I-6181.

* 3.7 Interchangeability. All parts having a given manufacturer's part number shall be functionally and dimensionally interchangeable with each other. The drawing number requirements of MIL-D-1000 shall govern changes in manufacturer's part number.

3.8 Current. The control shall be capable of making and breaking 5 amperes resistive at 28 volts DC.

3.9 Internal wiring. The internal wiring of the control shall be properly supported to prevent chafing or interference with operating parts.

3.10 Electrical receptacle. The electrical receptacle shall conform to MS33678 for type MS33678-14S-6P.

3.11 Case. The case of the control shall be made of a low-density nonferrous metal, uniform in texture, with a smooth surface, and shall be finished in durable dull black, color number 37038 of FED-STD-595.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:48Z
Check the source to verify that this is the current version before use.

3.12 Weight. The weight of the control, including the shock-mounted base, shall not exceed 1.30 pounds.

3.13 Screw threads. Unless otherwise specified, the threads of all machine screws 0.060 inch or larger in diameter shall conform to MIL-S-7742.

3.14 Finish and protective coatings.

3.14.1 Aluminum-alloy parts. Aluminum-alloy parts shall be covered with an anodic film conforming to MIL-A-8625, except that small holes and case inserts need not be anodized. If such parts are inside a hermetically sealed enclosure, they need not be anodized. Unless parts are subject to abrasion, they may be treated by a chemical film conforming to MIL-C-5541 in lieu of anodic film.

* 3.15 Pressure connections. The pressure ports shall be marked "PITOT" and "STATIC" and shall conform to MS33649-4 and MS33649-5, respectively, and shall be located as shown on Figure 1. A 150-mesh corrosion-resistant protective screen shall cover the static port opening inside the case.

3.15.1 Shipping plugs. The control shall be provided with two vented shipping plugs incorporating a vent hole 1/16 ±1/64 inch in diameter.

3.16 Markings. All markings shall be durable to withstand usage encountered in service.

3.17 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.18 Workmanship. The control shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of soldering, wiring, marking of parts and assemblies, plating, painting, riveting, machine screw assembly, welding, brazing, and freedom of parts from burrs and sharp edges.

3.18.1 Dimensions. Dimensions and tolerances not specified shall be as close as is consistent with best shop practices. Where dimensions and tolerances affect the interchangeability operation, or performance of the control, they shall be held or limited accordingly.

3.18.2 Screw assemblies. Assembly screws and bolts shall be tight. The word "tight" means that the screw or bolt cannot be appreciably tightened further without damage to the screw, bolt, or nut threads.

3.18.3 Cleaning. The control shall be thoroughly cleaned of loose, spattered or excess solder, metal chips, or other foreign material after assembly. Burrs and sharp edges, as well as resin flash which might crumble, shall be removed.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to

Source: https://assist.dla.mil -- Downloaded: 202640-20T06:48Z
Check the source to verify that this is the current version before use.

perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection and tests. The inspection and testing of controls shall be classified as follows:

a. Preproduction tests (see 4.3)

b. Quality conformance inspection (see 4.4)

* 4.3 Preproduction testing.

4.3.1 Test sample. The preproduction test sample shall consist of one control of a given manufacturer's part number. The sample control shall be identified and forwarded as specified in the contract or order (see 6.2).

* 4.3.2 Prior test and report. Prior to submitting the sample as specified in 4.3.1, the control shall be subjected to tests specified in 4.3.3. A report of these tests shall be prepared in accordance with MIL-STD-831, and a copy submitted with the sample specified in 4.3.1.

* 4.3.3 Preproduction tests. Preproduction tests shall consist of all the examinations and tests specified in 4.6.

* 4.4 Quality conformance inspection. Quality conformance inspection shall consist of individual tests (4.4.1) and sampling tests (4.4.2).

4.4.1 Individual tests. Each control shall be subjected to the following tests:

a.	Examination of product	(4.6.1)
b.	Dielectric strength	(4.6.2)
c.	Case leakage	(4.6.3)
d.	Airspeed sensor leakage	(4.6.4)
e.	Room-temperature operation	(4.6.5)

4.4.2 Sampling tests. The sampling tests shall consist of sampling plan A and sampling plan B tests.

4.4.2.1 Sampling plan A tests. One percent of the controls on each contract, but at least five controls, shall be selected at random and shall be subjected to the following tests:

a.	Attitude error	(4.6.6)
b.	Low-temperature operation	(4.6.7)
c.	High-temperature operation	(4.6.8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:48Z
Check the source to verify that this is the current version before use.

d.	Radio interference	(4.6.9)
e.	Vibration error	(4.6.10)
f.	Overpressure	(4.6.11)
g.	Seasoning	(4.6.12)

4.4.2.2 Sampling plan B tests. When so specified (see 6.2), three controls shall be selected at random from the first 10 controls produced under each contract and shall be subjected to the following tests:

Environmental tests (4.6.13)

4.4.3 Rejection and retest. When an item selected from a production run fails to meet the requirements of this specification, no items still on hand or later produced shall be accepted until the extent and cause of failure have been determined and appropriately corrected. The contractor shall explain to the Government representative the cause of failure and the action taken to preclude recurrence. After correction, all of the tests shall be repeated.

4.4.3.1 Individual tests may continue. For production reasons, individual tests or other sampling plans may be continued pending the investigation of a sampling test failure. Final acceptance of items on hand or items produced later shall not be made until it is determined that all items meet all the requirements of this specification.

4.4.3.2 Defects in items already produced. If the investigation of a test failure indicates that defects exist in items already accepted, the contractor shall fully advise the procuring activity of all defects likely to be found and the method of correcting them.

4.5 Test conditions.

4.5.1 Ambient pressure. Unless otherwise specified, all tests of this specification shall be performed at atmospheric pressure. If a control fails a test for which no amibent pressure other than atmospheric pressure is specified, the test shall be performed again with the control in an ambient pressure of 29.92 ±0.1 inches of mercury.

4.5.2 Ambient temperature. Unless otherwise specified, all tests of this specification shall be performed at room temperature. If a control fails a test for which no ambient temperature other than room temperature is specified, and in the opinion of the Government inspector the control might pass the test in an ambient temperature of 70° Fahrenheit (F), the test shall be performed again with the control in an ambient temperature of 70° ±1°F.

4.5.3 Setting. Whenever it is specified that the control shall be set to an airspeed, it shall be set by means of a manometer, and not by the dial.

4.5.4 Tapping. Except where otherwise specified, the control shall be gently tapped or vibrated before a test reading is taken.

4.5.5 Mounting. Unless otherwise specified, the control shall be tested on its shock-mounted base in its normal operating attitude.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T06:48Z
Check the source to verify that this is the current version before use.

4.5.6 Test equipment. During testing of the control, the pressure connections shall be connected to precision liquid barometers and manometers, the accuracy of which has been verified by comparison to a master or certified unit of comparable design.

4.5.7 External connections. Whenever it is required to provide external connections to simulate installed conditions, this shall consist of suitable AN connectors and at least 10 feet of copper or aluminum tubing, coiled and so arranged as to allow drainage of condensed vapors, attached to the pitot and static ports of the control.

4.6 Test methods.

4.6.1 Examination of product. Each control shall be examined, measured, and weighed, as necessary, to determine conformance to all requirements of this specification for which there are no specific tests.

4.6.2 Dielectric strength. There shall be no breakdown of insulation of any part of the control when it is subjected for 1 minute to a voltage of 500 volts at a commercial frequency of 60 cps, between each pin and the case.

4.6.3 Case leakage. The pitot and static connections of the control shall be jointed with a "Y" connection and shall be connected to a mercury manometer and a source of vacuum. A vacuum of 15 inches Hg shall be applied to the pitot and static connections of the control. With the source disconnected for a period of 10 seconds, the mercury level in the manometer shall not change by more than 0.2 inch. This procedure shall be repeated with a pressure of 10-inches Hg gage. The mercury level shall not change by more than 0.2 inch.


4.6.4 Airspeed sensor leakage. With the static connection open to atmosphere, the pitot connection shall be connected to a source of pressure and a mercury manometer. A pressure of 25-inches Hg gage shall be applied, and the pressure shall be pinched off or otherwise completely sealed. During a period of 1 minute, the reading of the manometer shall not change more than 0.0-inch Hg.

4.6.5 Room-temperature operation.

4.6.5.1 Pitot. The control shall be conneced for test purposes as shown on Figure 4. The following test procedure shall be used at each setting shown on Figure 4. The pressure shall be increased gradually with the reading on the manometer noted when the light goes out. This shall be known as the "up" reading. After the pressure reaches the equivalent of 500 knots, it shall be decreased gradually with the reading on the manometer noted when the light goes on. This shall be known as the "down" reading. The error of each reading at each setting shall not exceed ±5 knots, and the two readings at each setting shall not differ from each other by more than 10 knots.

4.6.5.2 Static. The control shall be connected as shown on Figure 5. The pressure shall be decreased gradually and the point at which the light goes out shall be noted on a mercurial barometer. This shall be known as the "up" reading and shall be 10,000 ±500 feet. The pressure shall be further decreased until 80,000 feet is reached. At this point, the pressure shall be increased until the light goes on. This shall be known as the "down" reading, and shall be 10,000 ±500 feet. The point at which the light goes on shall be noted on the mercurial barometer. The difference between the "up" and "down" readings shall not exceed 500 feet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:48Z
Check the source to verify that this is the current version before use.

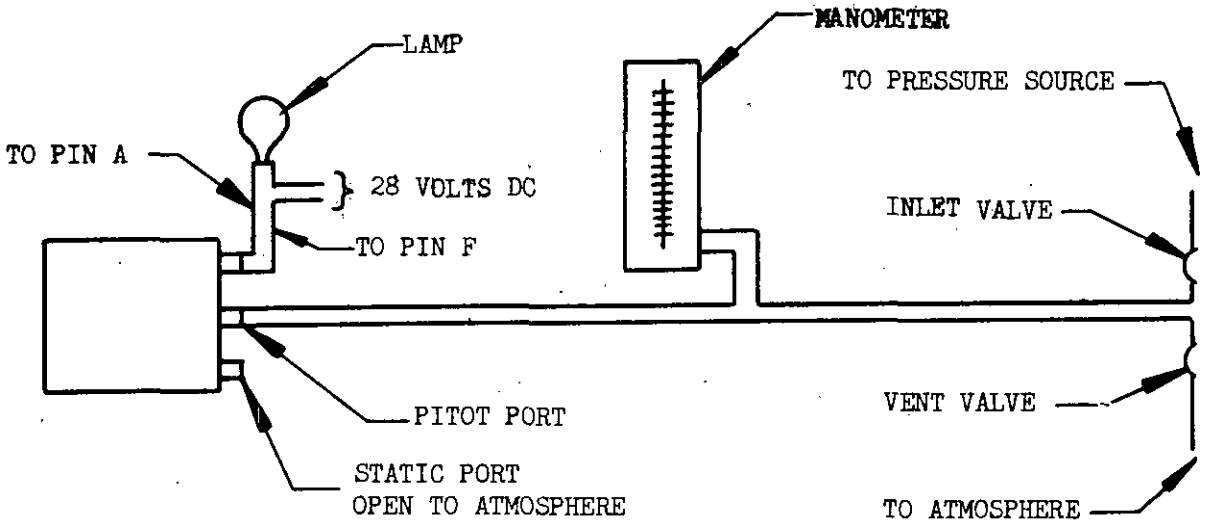

SETTING KNOTS	PRESSURE (IN HG)
100	.4821
120	.6959
140	.9501
160	1.2452
180	1.5820
200	1.9616
220	2.3849
240	2.8531

FIGURE 4. Airspeed section test setup

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:48Z
Check the source to verify that this is the current version before use.

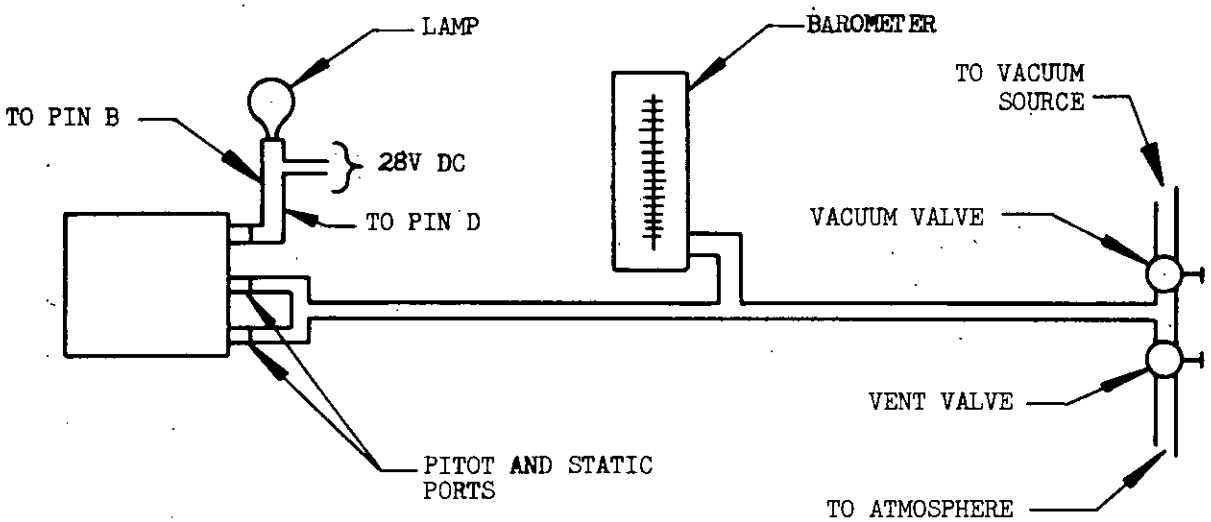


FIGURE 5. Altitude section test setup

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:48Z
Check the source to verify that this is the current version before use.

4.6.6 Attitude error. The control shall be tested as specified in the room-temperature-operation test (4.6.5) for attitude errors while held in all attitudes. The control shall be gently tapped before each reading. The difference between the original readings and readings taken in any other attitude shall not exceed 2 knots airspeed and 50 feet altitude.

4.6.7 Low-temperature operation. Each control selected in accordance with sampling plan A shall be set to one of the following airspeed settings at room temperature: 100, 140, 180, 220 and 240 knots. The controls shall then be subjected to a temperature of -55° ±2°C for a period of 4 hours. At the end of the 4-hour period, and while at this temperature, the controls shall be tested for operation at their individual preset values of airspeed and for altitude as specified under 4.6.5.1 and 4.6.5.2, respectively. The readings at low temperature shall not differ from the corresponding readings at room temperature by more than 5 knots airspeed and 500 feet altitude.

4.6.8 High-speed operation. This test shall follow the procedure specified in 4.6.7, except that the temperature shall be +70° ±2°C. The readings at high temperature shall not differ from the corresponding readings by more than 5 knots airspeed and 500 feet altitude.

4.6.9 Radio interference. The control shall be tested for radio interference as specified in MIL-I-6181.

4.6.10 Vibration error. The control shall be mounted in its normal attitude on a vibration stand and subjected to the vibration tests, Procedure XII of MIL-E-5272. The control shall be tested as specified in the room-temperature-operation test (4.6.5), while being vibrated. If flickering of the indicating lamps occurs, manometer reading shall be noted at both extremes of the range of flickering. The readings thus obtained shall not differ from the corresponding readings taken without vibration by more than 200 feet altitude and 2 knots airspeed.

4.6.11 Overpressure. A pressure equivalent to 850 knots shall be applied to the pitot port for 10 minutes. A pressure equivalent to 100,000 feet altitude shall be applied to the static port for 10 minutes. Not less than 5 minutes following the application of pressure, the control shall be tested as specified in the room-temperature-operation test (4.6.5). The readings obtained shall not differ from those obtained in the original room-temperature-operation test by more than 500 feet altitude and 5 knots airspeed.

4.6.12 Seasoning. The static pressure port of the control shall be subjected to 1,000 applications of an absolute pressure equivalent to 80,000 feet altitude with the pitot pressure port open to atmospheric pressure. The applications shall be made at a rate of approximately 3 per minute. The airspeed and altitude switch contacts shall be properly connected to a source of 28 volts DC and suitable resistive loads to cause the contacts to make and break a current of 5 amperes during this test. Not less than 48 hours after this test, the control shall be tested as specified in the room temperature operation test (4.6.5). The readings obtained shall not differ from those obtained in the original room temperature operation test by more than 10 knots airspeed and 1,000 feet altitude.

Source: https://assist.dla.mil -- Downloaded: 20261O-20T06:48Z
Check the source to verify that this is the current version before use.

4.6.13 Environmental tests. The following tests shall be conducted in accordance with the specified procedures of MIL-E-5272. External connections shall be made to the control to simulate installed conditions. At the completion of each test, the control shall pass the tests for room-temperature-operation (4.6.5).

a. Acceleration: Procedure I, subjected to 20g for 30 seconds. During this test, the contacts shall not open or close.

b. Vibration endurance: Procedure XII.

c. Low-temperature exposure: Procedure II, except that the temperature shall be +125°C.

d. High-temperature exposure: Procedure II, except that the temperature shall be +125°C.

e. Shock: Procedure IV. Five 10g shocks shall be applied along the horizontal and lateral axes in both directions. Five 15g shocks shall be applied along the vertical axis in both directions. There shall be no damage to any part of the control.

f. Salt spray: The salt spray shall be applied 50 hours.

g. Sand and dust: Procedure I.

h. Humdiity: Procedure I, but for a period of 10 cycles.

i. Fungus resistance: Procedure I.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Preservation and packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Cleaning and drying. The control shall be cleaned in accordance with C-1 and dried with procedure D-1 and D-4 of MIL-P-116.

5.1.1.2 Unit packaging. The control shall be packaged in accordance with Method IIB of MIL-P-116. The outer container shall be a fiberboard box conforming to PPP-B-636, style RSC, class overseas. The box shall be sealed with tape conforming to PPP-T-60, or equal.

5.1.2 Level C. Cleaning, drying, preservation, and packaging shall be in accordance with the manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. The controls, packaged as specified in 5.1, shall be packed for shipment in shipping containers conforming to PPP-B-601, overseas type, style A or B. Plywood shall be in accordance with NN-P-530. Closure and (or) strapping shall be in accordance with the appendix to the container specification. A waterproof case liner of material conforming to PPP-B-1055 shall be provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:48Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Level B packing shall be the same as Level A except the shipping container shall conform to PPP-B-601, domestic type, style A or B, and no case liner is required.

5.2.3 Level C. The controls, packaged as specified in 5.1, shall be packed to insure carrier acceptance and safe delivery at destination. Container shall conform to the Uniform Freight Classification Rules or regulations of other carriers as applicable to the mode of transportation. This may conform to the supplier's commercial practice when such meets the requirements of this level.

5.3 Physical protection. Interior cushioning, anchoring, blocking or bracing shall be in accordance with MIL-STD-1186.

5.4 Marking. In addition to any special marking, required by the contract or order, unit packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129.

6. NOTES.

6.1 Intended use. The control covered by this specification is intended to provide signals showing landing gear position and unsafe aircraft speeds for opening the landing gear doors.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. Applicable levels of preservation, packaging and packing (see 5.1 and 5.2).

c. Whether sampling plan B tests are required (see 4.4.2.2).

d. Reinspection date markings (see 5.2.1).

e. Where preproduction test sample should be sent and instructions concerning the submittal of test reports (see 4.3.1).

6.3 Definitions.

6.3.1 Amplitude. Whenever the word "amplitude" is specified, it shall mean the extent of motion as measured from one extreme to the opposite extreme.

6.3.2 Hermetic seal. A hermetic seal is defined as a perfectly closed and airtight seal made between vitric or metallic materials, or both. A hermetic seal is not intended to include seals accomplished by gaskets.

Source: https://assist.dla.mil -- Downloaded: 20260-20T06:48Z
Check the source to verify that this is the current version before use.

6.4 Asterisks. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Air Force - 82
Navy - AS

Preparing Activity:
Air Force - 82

Project No. 6340-0060

Source: https://assist.dla.mil - Downloaded: 202610-20T06:48Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

DEPARTMENT OF THE AIR FORCE

OFFICIAL BUSINESS

SAN ANTONIO AIR MATERIEL AREA
SERVICE ENGINEERING DIVISION (MMEOP)
KELLY AFB TX 78241

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T06:48Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-20T06:48Z
Check the source to verify that this is the current version before use.